



# JOLIET JUNIOR COLLEGE

---

1901

(Business & Auxiliary Services)  
 1215 Houbolt Road  
 Joliet, Illinois 60431-8938

## **INSTRUCTIONS TO BIDDERS**

Sealed proposals are invited for **BUILDING S & BUILDING B PIPING MODIFICATIONS** pursuant to specifications.

### **PROPOSALS:**

Proposals will be received and publicly read aloud by the Joliet Junior College District #525, Joliet, Will County, Illinois, at the place, date and time hereinafter designated.

**PLACE:** [CLICK HERE TO JOIN THE PUBLIC BID OPENING AT THE SPECIFIED DATE/TIME](#)

**DATE:** **MARCH 18, 2025**

### **FAXES ARE NOT ACCEPTABLE**

**TIME:** **9:00 AM**

Proposals received after this time will not be accepted.

Proposals must be submitted through the ESM Solutions electronic sourcing site. Please note that all vendors will have to complete an on-line registration process prior to submitting your proposal. A step-by-step supplier registration guide is posted to the college's website for your reference. General supplier guides are also available on the ESM website. If you have any questions during the registration process, contact ESM Solutions Customer Support (877) 969-7246 Option 3.

### **Registration Link:**

<https://supplier.esmsolutions.com/registration#/registration/contactInformation/>

### **General Supplier Guide (ESM Documents):**

<https://support.esmsolutions.com/hc/en-us/sections/115000917048-Supplier-Guides>

### **Supplier Registration Guide (JJC Document):**

<https://www.jjc.edu/sites/default/files/Purchasing/FY2019/Supplier%20Registration%20Screenshots%20Final.pdf>

### **PRE-BID MEETING:**

An optional pre-bid meeting will be held on **MARCH 4, 2025 at 9:00 AM**. The meeting will be at the Main Campus, L Building, Room L-1005, 1215 Houbolt Road, Joliet, IL.

### **DELIVERY:**

All prices must be quoted F.O.B., Joliet Junior College, 1215 Houbolt Road, Joliet, IL 60431 unless otherwise noted.

### **TAX EXEMPTION:**

Joliet Junior College District #525 is exempt from Federal, State, and Municipal taxes.

**SIGNATURE ON BIDS:**

Joliet Junior College District #525 requires the signature on bid documents to be that of an authorized representative of said company.

Each bidder, by making his bid, represents that he has read and understands the bidding documents and that these instructions to bidders are a part of the specifications.

**BIDDING PROCEDURES:**

1. No bid shall be modified, withdrawn, or cancelled for sixty (60) days after the bid opening date without the consent of the College Board of Trustees.
2. Changes or corrections may be made in the bid documents after they have been issued and before bids are received. In such case, a written addendum describing the change or correction will be issued by the College to all bidders of record. Such addendum shall take precedence over that portion of the documents concerned, and shall become part of the bid documents. Except in unusual cases, addendum will be issued to reach the bidders at least five (5) days prior to date established for receipt of bids.
3. Each bidder shall carefully examine all bid documents and all addenda thereto, and shall thoroughly familiarize themselves with the detailed requirements thereof prior to submitting a proposal. Should a bidder find discrepancies or ambiguities in, or omissions from documents, or should they be in doubt as to their meaning, they shall, at once, and in any event, not later than ten (10) days prior to bid due date, notify the College who will, if necessary, send written addendum to all bidders. The college will not be responsible for any oral instructions. All inquiries shall be directed to the Director of Business & Auxiliary Services. After bids are received, no allowance will be made for oversight by bidder.

**SUBSTITUTIONS:**

1. Each bidder represents that his bid is based upon the materials and equipment described in the bidding documents.
2. Any dealer bidding an equal product must specify brand name, model number, and supply specifications of product. The Board shall be the sole judge of whether an article shall be deemed to be equal.
3. A bidder's failure to meet the minimum specifications as listed may result in disqualification of his bid.

**REJECTION OF BIDS:**

The bidder acknowledges the right of the College Board to reject any or all proposals and to waive informality or irregularity in any proposal received and to award each item to different bidders or all items to a single bidder. In addition, the bidder recognizes the right of the College Board to reject a proposal if the proposal is in any way incomplete or irregular. The College Board may also award, at its discretion, only certain items quoted on. The College Board also reserves the right to reject the proposal of a Bidder who has previously failed to perform properly or complete on time contracts of a similar nature or a bid of a Bidder when investigation shows that Bidder is not in a position to perform the contract.

**BUSINESS ENTERPRISE PROGRAM (BEP):**

MINORITIES, FEMALES, AND PERSONS WITH DISABILITIES PARTICIPATION AND UTILIZATION PLAN:

Joliet Junior College will make every effort to use local business firms and contract with small, minority-owned, and/or women-owned businesses in the procurement process. Many solicitations contain a goal to include businesses owned and controlled by minorities, females, and persons with disabilities in the College's procurement and contracting processes in accordance with the State of Illinois' Business Enterprise for Minorities, Females, and Persons with Disabilities Act (30 ILCS 575).

**For all construction related projects, vendors are encouraged to utilize BEP certified suppliers and subcontractors. Bidders will be prompted to note BEP certifications within the ESM electronic bidding system.**

**PROPRIETARY INFORMATION:**

Vendor should be aware that the contents of all submitted bids are subject to public review and will be subject to the Illinois Freedom of Information Act. All information submitted with your bid will be considered public information unless vendor identifies all proprietary information in the proposal by clearly marking on the top of each page so considered, "Proprietary Information." The Illinois Attorney General shall make a final determination of what constitutes proprietary information or trade secrets. While JJC will endeavor to maintain all submitted information deemed proprietary within JJC, JJC will not be liable for the release of such information.

**ACKNOWLEDGEMENT OF ADDENDA:**

Signature of company official on original document shall be construed as acknowledgement of receipt of any and all addenda pertaining to this specific proposal. Identification by number of addenda and date issued should be noted on all proposals submitted.

**FAILURE TO ACKNOWLEDGE RECEIPT OF ADDENDA ON PROPOSAL SUBMITTED MAY RESULT IN DISQUALIFICATION OF PROPOSAL.**

**Bidders who obtain a copy of the bid from our web site are responsible for checking back on the site for any addenda issued.**

**CLERICAL ERRORS:**

If applicable, all errors in price extensions will be corrected by Joliet Junior College and totals for award determination corrected accordingly, unless the bidder specifies that no change be made in the total submitted. In this case, all incorrect price extensions will be noted at "lot", and award determination made on the basis of total price submitted.

**SAMPLES:**

Bidder may be required to furnish samples upon request and without charge to the College.

**BID SECURITY:**

A certified check or bank draft or bid bond, made payable to Joliet Junior College District #525, Will County, Illinois, **MUST** be submitted with the bid in the amount of **ten (10) percent of your total bid**. The bid security will be forfeited by the successful bidder in the event of the bidders failure to enter into a contract. Checks or drafts of unsuccessful bidders will be returned as soon as practicable

after opening and checking the bids.

**PAYMENTS:**

Certified Payroll

1. With each pay application, contractors shall submit certified payroll in a format acceptable to Junior College District #525.

Partial Lien Waivers

1. The contractors' partial lien waiver, for the full amount of the payment, shall accompany the first payment application. Each subsequent payment application shall be accompanied by the contractor's partial waiver, and by partial waivers from all subcontractors and suppliers who were included in the immediately preceding payment application, to the extent of that payment.
2. Lien waivers from the Contractor and all subcontractors and suppliers shall accompany the first payment application when the amount of payment exceeds 50 percent of the total contract sum.

Final Lien Waivers: The contractor's request for final payment shall include:

1. The contractor's final lien waiver in the full amount of the contract.
2. Final lien waivers in the full amount of their contracts from all subcontractors and suppliers for which final lien waivers have not previously been submitted.

**INSURANCE:**

The successful bidder will be required to furnish a certificate of insurance in the following amounts:

The insurance coverage required here-in-under shall be the minimum amounts maintained by the Contractor and Subcontractors until all Work is completed and accepted by the Owner.

The Contractor will purchase and maintain "all risks" Builder's Risk property insurance, where applicable, subject only to such exclusions as have been specifically approved by the Owner in writing.

A. Workers Compensation

1. State: Statutory
2. Applicable Federal: Statutory
3. Employer's Liability:
  - a. \$1,000,000 per Accident
  - b. \$1,000,000 Occupational Disease

B. Commercial Comprehensive Liability

1. Each Occurrence: \$1,000,000
2. Products/Completed Operations Aggregate: \$2,000,000
3. Personal/Advertising Injury: \$1,000,000
4. General Aggregate: \$2,000,000
5. Policy shall include: \$2,000,000
  - a. Premises: Operations
  - b. Independent Contractors Liability

- c. Products and Completed Operations: Maintained for minimum of one year after date of final Certificate for Payment, in full amount of the limits specified above.
  - d. Contractual Liability
  - e. Coverage for explosion (x), collapse (c), and underground (u).
6. The Commercial Comprehensive Liability policy shall include a contractual liability endorsement insuring the indemnity required by the contract. The indemnities shall be named as additional insured on the Contractor's Commercial Comprehensive Liability policy using Form CG 20 10 or its equivalent and shall name Joliet Junior College, its Board of Trustees, officers, employees and agents as additional named insured's at a minimum. The Contractor hereby agrees to effectuate the naming of such additional insured's as unrestricted additional insured's on the Contractor's policy. The additional insured endorsement shall provide the following:
- a. That the coverage afforded the additional insurance will be primary/non-contributory insurance for the additional insurance with respect to claims arising out of operations performed by or on behalf of the Contractor.
  - b. That the policy shall contain a thirty (30) day notice of cancellation prior to the effective date thereof.
  - c. That the additional insureds have other insurance which is applicable to the loss, such other insurance will be on an excess or contingent basis.
  - d. That the amount of the company's liability under the insurance policy will not be reduced by the existence of such other insurance.
  - e. That the additional insureds will not be given less than thirty (30) days prior written notice of any cancellation thereof.
  - f. That the Contractor agrees to indemnify the College for any applicable deductibles.
  - g. That the insurance policy from an A.M. Best rated "secured" Illinois State licensed insurer.
  - h. The Contractor shall provide the College with a copy of its insurance policy or in the alternative and subject to the College's agreement, an excerpt of a page from the actual policy evidencing the additional insureds as provided for herein.
  - i. Contactor acknowledges that failure to obtain such insurance on behalf of the College constitutes a material breach of the contract and subjects Contractor to liability for damages, indemnification and all other legal remedies available to College. The Contractor is to provide the College at all times with a certificate of insurance, evidencing the above requirements have been met. The failure of the College to object to the contents of the certificate or the absence of it shall not be deemed a waiver of any and all rights held by the College.
  - j. That enclosed is a copy of the endorsement providing additional insured's status and that the Contractor will furnish a Certificate of insurance evidencing the foregoing provisions.
  - k. Please include clause below in the policy:  
It is agreed that Joliet Junior College, its Board of Trustees, officers, employees, agents and (Architect/Engineer Name) are additional insureds on the policy.

C. Business Auto Liability (including owned, non-owned and hired vehicles).

1. Bodily injury
  - a. \$1,000,000 per person
  - b. \$2,000,000 per accident
2. Property damage: \$1,000,000      OR
3. Combined Single limit: \$1,000,000

#### D. Umbrella

1. Umbrella Excess Liability: \$4,000,000
2. If the Contractor's Workers Compensation, Commercial General Liability and Business Auto policies do not have these minimum limits, an Umbrella policy written by an insurance company acceptable to the Owner may be used to meet the minimum limits required.
3. Follow-form or Primary/Non-Contributory (PNC) status and Waiver of Subrogation (WOS) for Joliet Junior College

All such policies of insurance shall be written by companies approved by the College and Certificates of Insurance shall be furnished to the College. The College shall be listed as an additional named insured under such policies. Each policy shall require at least 30 days' notice to the College in the event of cancellation. The contractor agrees to indemnify, defend, and hold harmless the College from and against all suits or claims, which may be based upon any injury to or death of any person or persons or damage to property, which may occur or which may be alleged to have occurred in the course of the performance of this Agreement by the Contractor, whether such sum claim shall be made by an employee of the Contractor, by a third person or their representatives, or whether or not it shall be claimed that the said injury, death, or damage or cause through a negligence act or omission of the Contractor; and the all charges of attorneys and all costs and other expenses arising there from or incurred in connection therewith; and if any judgment shall be rendered against the College in any such action or actions, the Contractor, at its own expense, shall satisfy and discharge the same.

#### **PERFORMANCE BONDS:**

The successful bidder on this proposal must furnish a performance bond and a labor and material payment bond made out to Junior College District #525, prepared on an approved form, as security for the faithful performance of their contract, within ten (10) days of their notification that their bid has been accepted. The surety thereon must be such surety company or companies as are authorized and licensed to transact business in the State of Illinois and have an A-XIV best rating. Attorneys in fact who sign bid bonds must file with each bond a certified copy of their power of attorney to sign said bonds. The performance bond is an amount equal to one hundred and ten percent (110%) of the contract sum. Such bonds shall be in force from the date of signing of the contract until one year after issuing of final certificate of payment. The cost of the bonds shall be included in the bidder's proposal.

#### **LAWS AND ORDINANCES:**

In execution of the work, the Contractor shall comply with applicable state and local laws, ordinances and regulation, the rules and regulations of the Board of Fire Underwriters, and OSHA standards.

#### **SEX OFFENDER REGISTRATION REQUIREMENT NOTIFICATION:**

Illinois Compiled Statutes (730 ILCS 150/2) requires that any person who is required by law to register as a sex offender and who is either a student or an employee at an institution of higher education, must also register with the police department of the institution they are employed by or

attending. For purposes of this act, a student or employee is defined as anyone working at or attending the institution for a period of five (5) days or an aggregate period of more than thirty (30) days during a calendar year. This includes persons operating as or employed by an outside contractor at the institution. Anyone meeting the above requirements is required to register at the Campus Police Department located in G1013, within five (5) days of enrolling or becoming employed. Persons failing to register are subject to criminal prosecution.

#### **DAMAGE AND NEGLIGENCE:**

The Contractor agrees to indemnify and save harmless the College and employees from and against all loss, including costs and attorney's fees, by reasons or liability imposed by law upon the College for damages because of bodily injury, including death at any time resulting therefrom, sustained by any person or persons or on account of damage to property including loss of use thereof as provided in the General Conditions and Supplementary Conditions.

College shall not be responsible for damages, delays, or failure to perform on its part resulting from acts or occurrences of force majeure. "Force majeure" means any (a) act of God, landslide, lightning, earthquake, hurricane, tornado, blizzard, floods and other adverse and inclement weather conditions; (b) fire, explosion, flood, acts of a public enemy, war, blockade, insurrection, riot or civil disturbance; (c) labor dispute, strike, work slow down, picketing, primary boycotts, secondary boycotts or boycotts of any kind and nature, or work stoppages; (d) any law, order, regulation ordinance, or requirement of any government or legal body or any representative of any such government or legal body; (e) inability to secure necessary materials, equipment, parts or other components of the project as a result of transportation difficulties, fuel or energy shortages, or acts or omission of any common carriers; or (f) any other similar cause or similar event beyond the reasonable control of College.

#### **INVESTIGATION OF BIDDERS:**

The College will make any necessary investigation to determine the ability of the bidder to fulfill the proposal requirements. Joliet Junior College reserves the right to reject any proposal if it is determined that the bidder is not properly qualified to carry out the obligation of the contract.

#### **DISCLOSURE:**

Vendor shall note any and all relationships that might be a conflict of interest and include such information with the bid.

#### **APPRENTICESHIP AND TRAINING PROGRAMS:**

The bidder and all bidder's subcontractors must participate in applicable apprenticeship and training programs approved by and registered with the United States Department of Labor Bureau of Apprenticeship and Training. The apprenticeship and training programs(s) must be in the same trade in which the firm shall be performing work on behalf of the College under the Contract. This provision shall not apply to federally funded construction projects if, in the opinion of College, such application would jeopardize the receipt or use of federal funds in support of such project.

**A STATEMENT TO THE ABOVE EFFECT HAS BEEN ADDED TO THE BID FORM. BIDDERS MUST BE A MEMBER OF AN APPROVED APPRENTICESHIP PROGRAM PRIOR TO BID OPENING ON THE PROJECT. FAILURE TO LIST REQUIRED INFORMATION MAY RESULT IN DISQUALIFICATION OF BID".**

#### **SUBCONTRACTORS:**

Bidders must state on the proposal form all subcontractors he intends to use for this project. Failure to do so may be cause for rejection of bid.

### **PREVAILING WAGE RATE:**

The successful bidder must pay not less than the prevailing hourly wage rate determined by the Illinois Department of Labor for the county where the contract is executed and the craft or type of worker needed to execute the contract. See the prevailing wage scale attached.

If, during the course of work under this contract, the Department of Labor revises the prevailing rate hourly wages to be paid under this contract for any trade or occupation, Owner, will notify Contractor and each Subcontractor of the changes in the prevailing rate of hourly wages. Contractor shall have the sole responsibility and duty to ensure that the revised prevailing rate of hourly wages is paid by contractor and all Subcontractors to each worker to whom a revised rate is applicable. Revisions to the prevailing wage as set forth above shall not result in an increase in the Contract Sum.

In compliance with the Office of the Attorney General the following is also required of all bidders:

#### Payment of Prevailing Wage:

- The Act requires that all laborers, workers and mechanics employed by or on behalf of a public body in the construction of public works be paid the general prevailing rate of hourly wages (including allotments for training and approved apprenticeship programs, health and welfare, insurance, vacation and pension benefits) for work of a similar character in the locality in which the work is performed. See 820 ILCS 103/3. The Act contains all relevant definitions, including those for the terms “public body”, “public works” and “general prevailing rate of hourly wages”, which will assist you in the understanding its requirements and your responsibilities. See 820 ILCS 130/2.
- The Illinois Department of Labor publishes the current prevailing wage rate. See <http://www.state.il.us/agency/idol/rates/rates.htm>. The rate is revised regularly and such revision takes effect immediately.

#### Specifications and Contractual Language:

- Public bodies must insert a provision or stipulation requiring the payment of the prevailing wage rate into every public works resolution or ordinance, call for bids, project specification and contract. See 820 ILCS 130/4(a).
- Contractors and subcontractors must insert a provision or stipulation regarding the payment of the prevailing wage rate into every public works project and bid specification, subcontract, and contractor’s bond. See 820 ILCS 130/4(b), (c).
- Contractors or construction managers who have been awarded public works contracts must post the relevant prevailing wage rate(s) at a location on the project site that is easily accessible by workers. See 820 ILCS 130/4(f).

#### Record-Keeping Responsibilities:

- All contractors and subcontractors must create and keep for at least three years, records of all laborers, mechanics, and other workers employed by them on a public works project. See 820 ILCS 130/5(a) (1).
- These records must include each worker’s name, address, telephone number (if available), social security number, classification(s), hourly wages paid in each pay period, number of hours worked each day, and the starting and ending times of each work day. Each contractor and subcontractor is required to make these records available for inspection by the public body’s agents or Illinois Department of Labor officials at a reasonable time and place upon



seven business days notice. See 820 ILCS 130/5(a) (1), (b).

#### Certified Payroll Records:

- A contractor or subcontractor participating in a public works project must also submit a Certified Payroll the public body every month. This Certified Payroll must consist of a complete copy of the records required to be kept under Section 5(a)(1) of the Act, discussed above (with the exception of daily work starting and ending times). See 820 ILCS 130/5(a)(2).
- The monthly Certified Payroll shall also include a statement signed by the contractor or subcontractor submitting that: (1) the records are true and accurate; (2) the hourly rate paid to each worker is not less than the general prevailing wage rate required; and (3) the contractor or subcontractor is aware that filing a Certified Payroll that he or she knows to be false is a class B misdemeanor. See 820 ILCS 130/5(a)(2).
- The Act requires that a public body shall keep all Certified Payrolls submitted pursuant to the Act for at least three years. See 820 ILCS 130/5(a)(2). The retention of these monthly Certified Payroll submissions for three years by public bodies is crucial to the State of Illinois' efforts to enforce the Act and will be of particular interest to the Attorney General's office in the coming months.

#### Failure to comply with the Act's Requirements:

- No public works project may be instituted unless the provisions of the Act have been met. The Illinois Department of Labor is empowered to sue for injunctive relief against the awarding of any public works contract, or continuation of work under any such contract, if it is not in compliance with the Act's prerequisites. Contracts that are not in compliance with the Act's prerequisites are void as against public policy. See 820 ILCS 103/11.

Please note that this is not a complete list of all relevant requirements and prerequisites under the Act. All contractors and subcontractors rendering services under this contract must comply with all requirements of the Act, including but not limited to, all wage, notice and record keeping duties. For a full understanding of all of the Act's requirements and prerequisites, as well as the text of the Act and all related regulations, please see the Illinois Department of Labor's website at [www.state.il.us/agency/idol/laws/Law130.htm](http://www.state.il.us/agency/idol/laws/Law130.htm).

#### **BLACKOUT PERIOD:**

After the College has advertised for bids, no pre-bid vendor shall contact any College officer(s) or employee(s) involved in the solicitation process, except for interpretation of bid specifications, clarification of bid submission requirements or any information pertaining to pre-bid conferences. Such bidders or sub-bidders making such request shall be made in writing at least seven (7) days prior to the date for receipt of bids. No vendor shall visit or contact any College officers or employees until after the bids are awarded, except in those instances when site inspection is a prerequisite for the submission of a bid. During the black-out period, any such visitation, solicitation or sales call by any representative of a prospective vendor in violation of this provision may cause the disqualification of such bidder's response.

#### **BID QUANTITIES:**

The College Board will reserve the right to increase or decrease, within reasonable limits, such quantities as need requires and at the unit price stated.

#### **BID AWARDS:**

The successful contractor, and/or any contractor shall not proceed on this bid until it receives a

purchase order from the college. Failure to comply is the risk of that contractor.

**TERMINATION OF FUNDING:**

JJC's contractual obligations will be subject to termination and cancellation without penalty, accelerated payment, or other recoupment mechanism as provided herein in any fiscal year for which the Illinois General Assembly or other legally applicable funding source fails to make an appropriation to make payments under the terms of this Contract. In the event of termination for lack of appropriation, the Vendor shall be paid for services performed under this Contract up to the effective date of termination. JJC shall give notice of such termination for funding as soon as practicable after JJC becomes aware of the failure of funding.

**CHANGES TO CONTRACT AFTER BID AWARD:**

There shall be no deviations from any work without a written change order. All change orders must be approved by the Director of Business & Auxiliary Services or Vice President of Administrative Services as well as executed by the successful contractor.

If a change order or aggregate of change orders are 10% or more of the contract price, and such change orders are not approved, in writing, by either the Director of Business & Auxiliary Services or Vice President of Administrative Services, the successful contractor shall not be entitled to any type of compensation for services or materials provided.

**GENERAL:**


Joliet Junior College is committed to a policy of non-discrimination on the basis of sex, handicap, race, color, and national or ethnic origin in the admission, employment, educational programs, and activities it operates. Inquiries should be addressed to the Director of Human Resources.

The contractor (or vendor) shall agree to save and hold harmless the Joliet Junior College District #525, the members of its College Board, its agents, servants and employees, from any and all actions or causes of action, or claim for damages, including the expense of defending suit, arising or growing out of the performance of, or failure to perform its contract.

The parties to any contract (inclusive of subcontractors) resulting from this bid hereto shall abide by the requirements of Executive Order 11246, 42 U.S.C. Section 2000d and the regulations thereto, as may be amended from time to time, the Illinois Human Rights Act, and the Rules and Regulations of the Illinois Department of Human Rights. Any vendor awarded a contract as a result of this bid must comply with the Illinois Department of Human Rights Equal Opportunity Act/Rules Sections 750.5 and 5/2-105.

Pursuant to Section 50-80 of the Illinois Procurement Code, each bidder who submits a bid or offer for a State of Illinois contract under this Code shall have a sexual harassment policy in accordance with paragraph (4) of subsection (A) of Section 2-105 of the Illinois Human Rights Act. A copy of the policy shall be provided to the college entering into the contract upon request.

The Customer reserves the right to request additional information after your proposal has been submitted.

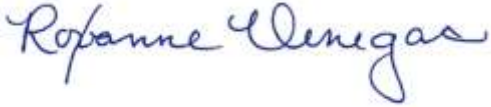

---

Roxanne Venegas  
Purchasing Manager

JOLIET JUNIOR COLLEGE  
ILLINOIS COMMUNITY COLLEGE DISTRICT #525  
(Business & Auxiliary Services)  
1215 Houbolt Road  
Joliet, Illinois 60431-8938  
Telephone: (815) 280-6640  
Fax: (815) 280-6631

**INFORMATION PERTAINING TO OUR BIDS CAN BE FOUND AT THE FOLLOWING WEBSITE:**  
<http://www.jic.edu/community/vendors>

**QUESTIONS PERTAINING TO THIS BID CAN BE SUBMITTED IN THE ESM ELECTRONIC  
BIDDING SYSTEM.**

**PROJECT MANUAL  
FOR  
BUILDING 'S' AND BUILDING 'B' PIPING MODIFICATIONS  
JOLIET, ILLINOIS**

**OWNER**

JOLIET JUNIOR COLLEGE  
1215 HOUBOLT ROAD  
JOLIET, ILLINOIS 60431

**ARCHITECT / ENGINEER**

KLUBER, INC.  
41 W. BENTON STREET  
AURORA, ILLINOIS 60506



**BID DOCUMENTS**

**SECTION 00 01 01  
PROJECT TITLE PAGE**

**PROJECT MANUAL**

**FOR**

**BUILDING 'S' AND BUILDING 'B' PIPING MODIFICATIONS**

**1215 HOUBOLT ROAD**

**JOLIET, ILLINOIS 60431**

**OWNER**

**JOLIET JUNIOR COLLEGE**

**1215 HOUBOLT ROAD**

**JOLIET, ILLINOIS 60431**

**ARCHITECT / ENGINEER**

**KLUBER ARCHITECTS + ENGINEERS**

**41 W. BENTON STREET**

**AURORA, ILLINOIS 60506**

**END OF DOCUMENT**


SECTION 00 01 07  
SEALS PAGE

1.01 DESIGN PROFESSIONALS' SEALS


A. ARCHITECT

B. MECHANICAL ENGINEER


C. ELECTRICAL ENGINEER

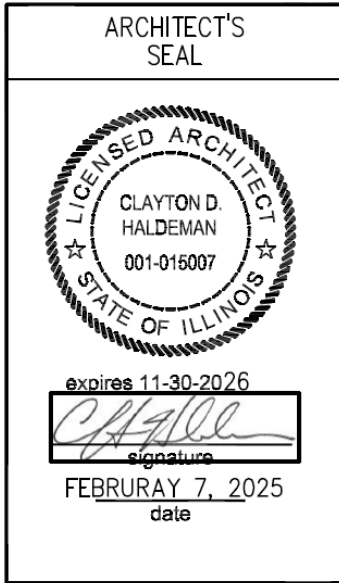

"G" SERIES, "ME320",  
"ME321"

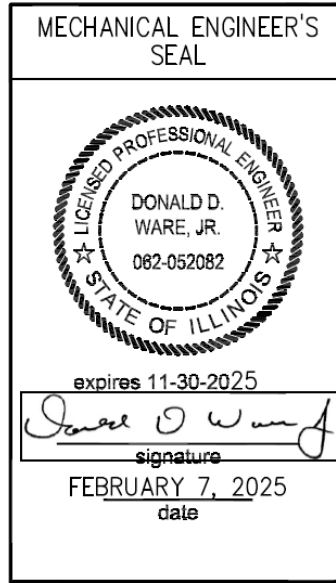

"G" SERIES, "M" SERIES

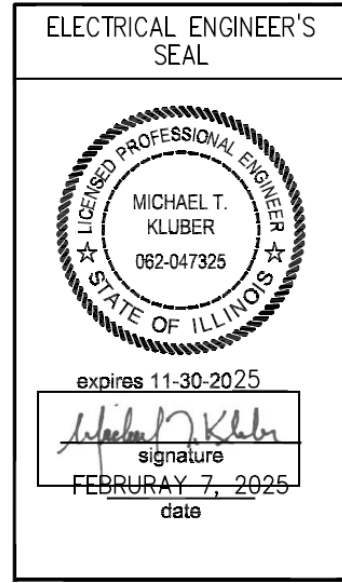

"G" SERIES, "ME320",  
"ME321"

END OF DOCUMENT

<b>SECTION 00 01 10</b>		
<b>TABLE OF CONTENTS</b>		
<b>PROCUREMENT AND CONTRACTING REQUIREMENTS</b>		<b>PAGES</b>
<b>INTRODUCTORY INFORMATION</b>		
00 01 01	Project Title Page	00 01 01-1-1
00 01 07	Seals Page	00 01 07-1-1
00 01 10	Table of Contents	00 01 10-1-2
00 01 15	Drawing Index	00 01 15-1-1
<b>SPECIFICATIONS</b>		<b>PAGES</b>
<b>DIVISION 01 -- GENERAL REQUIREMENTS</b>		
01 30 00	Administrative Requirements (One Page Attachment)	01 30 00-1-5
01 41 00	Regulatory Requirements	01 41 00-1-2
01 42 00	References	01 42 00-1-4
01 60 00	Product Requirements (One Page Attachment)	01 60 00-1-4
01 70 00	Execution and Closeout Requirements	01 70 00-1-7
01 77 00	Closeout Procedures	01 77 00-1-1
01 78 00	Closeout Submittals	01 78 00-1-5
01 79 00	Demonstration and Training	01 79 00-1-3
<b>DIVISION 02 -- EXISTING CONDITIONS</b>		
02 41 00	Demolition	02 41 00-1-4
<b>DIVISION 04 -- MASONRY</b>		
04 20 00	Unit Masonry	04 20 00-1-6
<b>DIVISION 07 -- THERMAL AND MOISTURE PROTECTION</b>		
07 24 00	Exterior Insulation and Finish Systems	07 24 00-1-7
07 62 00	Sheet Metal Flashing and Trim	07 62 00-1-3
07 92 00	Joint Sealants	07 92 00-1-5
<b>DIVISION 09 -- FINISHES</b>		
09 90 00	Painting and Coating	09 90 00-1-3
<b>DIVISION 23 -- HEATING, VENTILATING, AND AIR-CONDITIONING (HVAC)</b>		
23 05 19	Meters and Gauges for HVAC Piping	23 05 19-1-2
23 05 53	Identification for HVAC Piping and Equipment	23 05 53-1-3
23 05 93	Testing, Adjusting, and Balancing for HVAC	23 05 93-1-3
23 07 19	HVAC Piping Insulation	23 07 19-1-5
23 09 13	Instrumentation and Control Devices for HVAC	23 09 13-1-5
23 21 13	Hydronic Piping	23 21 13-1-6

23 21 14	Hydronic Specialties	23 21 14-1-3
23 21 23	Hydronic Pumps	23 21 23-1-2
23 25 00	HVAC Water Treatment	23 25 00-1-2

**DIVISION 26 -- ELECTRICAL**

26 05 00	Basic Electrical Requirements	26 05 00-1-6
26 05 83	Wiring Connections	26 05 83-1-2
26 24 16	Panelboards	26 24 16-1-2

**END OF SECTION**



**SECTION 00 01 15  
DRAWING INDEX**

**GENERAL**

G100 COVER SHEET, GENERAL NOTES, SYMBOLS & DRAWING INDEX

**MECHANICAL**

M100 PARTIAL CAMPUS MECHANICAL FLOOR PLAN

M310 BUILDING 'S' - PARTIAL FLOOR PLANS AND DETAILS

ME320 BUILDNG 'B' - MECHANICAL ROOM PLANS AND DETAILS

ME321 BUILDING 'C' - MECHANICAL PLATFORM PLANS AND DETAILS

**END OF DOCUMENT**

**SECTION 01 30 00  
ADMINISTRATIVE REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Submittals for review, information, and project closeout.
- B. Architect/Engineer-provided CAD files.
- C. Number of copies of Submittals.
- D. Submittal procedures.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 70 00 - Execution and Closeout Requirements: Additional coordination requirements.
- B. Section 01 78 00 - Closeout Submittals: Project record documents; operation and maintenance data; warranties and bonds.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION**

**3.01 SUBMITTALS FOR REVIEW**

- A. When the following are specified in individual sections, submit them for review:
  - 1. Product data.
  - 2. Shop drawings.
- B. Submit to Architect/Engineer for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.

**3.02 SUBMITTALS FOR PROJECT CLOSEOUT**

- A. Submit Correction Punch List for Substantial Completion.
- B. Submit Final Correction Punch List for Substantial Completion.
- C. When the following are specified in individual sections, submit them at Project Closeout:
  - 1. Project record documents.
  - 2. Operation and maintenance data.
  - 3. Warranties.
  - 4. Bonds.
  - 5. Other types as indicated.
- D. Submit for Owner's benefit during and after Project completion.

**3.03 ARCHITECT/ENGINEER-PROVIDED CAD FILES**

- A. After the execution of the Contract, Architect/Engineer will provide, free of charge, upon receipt of a properly completed and signed request utilizing "Electronic Data Transfer Consent Form" at the end of this Specification Section, CAD files depicting graphic information for the project as follows:
  - 1. Architectural Floor Plans: Column grid, walls, floors, stairs, doors, windows, room numbers, ceiling grid, mechanical diffusers, plumbing fixtures, sprinkler heads (if depicted in Bid

Documents) and lights.

- B. Contractor acknowledges and accepts that the Architectural Floor Plans do not contain structural, mechanical, electrical, plumbing, fire protection and other building systems information depicted in the Bidding Documents. Examples of information not contained in these files include, but are not limited to, title blocks, keynotes, schedules, mechanical ductwork and equipment, electrical device symbols, circuit numbers and home runs, plumbing equipment, piping runs and riser diagrams, and architectural/engineering text or details. No other CAD files, data or information will be provided.
- C. Only a request from The Contractor will be honored. Subcontractors must obtain the files from the Contractor.
- D. In submitting a request, Contractor acknowledges that:
  - 1. Architect/Engineer bears no responsibility for the data or its transmission,
  - 2. Use of the data by the Contractor or his Subcontractors in no way relieves the Contractor of his obligations under the Contract,
  - 3. Contractor is solely liable for any and all claims arising from any and all products generated by the Contractor or its Subcontractors employing the data,
  - 4. Contractor and its Subcontractors have a limited, non-exclusive license to use the data solely in connection with the Work of the Project, and that
  - 5. Architect/Engineer retains all rights, including copyright, to the data.

### 3.04 NUMBER OF COPIES OF SUBMITTALS

- A. Documents for Review:
  - 1. Small Size Sheets: Not Larger Than 11 x 17 inches. Submit 2 paper copies, one of which will be retained by Architect/Engineer. Contractor shall make his own copies from the original returned by the Architect.
    - a. Contractor's Option: In lieu of paper copies indicated above, submit in Adobe PDF electronic file format via email. Architect will return a reviewed copy in Adobe PDF electronic file format via email. Create PDFs at native size and right-side up; illegible files will be rejected.
  - 2. Large Size Sheets: Larger Than 11 x17 inches; 36 x 48 inches maximum. Submit 2 paper copies, one of which will be retained by Architect/Engineer.
    - a. Contractor's Option: In lieu of paper copies indicated above, submit in Adobe PDF electronic file format via email. Architect will return a reviewed copy in Adobe PDF electronic file format via email. Create PDFs at native size and right-side up; illegible files will be rejected.
- B. Extra Copies at Project Closeout: See Section 01 78 00.

### 3.05 SUBMITTAL PROCEDURES

- A. Product Data Procedures:
  - 1. Submit only information required by individual specification sections.
  - 2. Collect required information into a single submittal.
  - 3. Do not submit (Material) Safety Data Sheets for materials or products.
- B. Shop Drawing Procedures:
  - 1. Prepare accurate, drawn-to-scale, original shop drawing documentation by interpreting the Contract Documents and coordinating related Work.

2. Generic, non-project specific information submitted as shop drawings do not meet the requirements for shop drawings.
- C. Transmit each Submittal with a copy of approved Submittal form.
- D. Transmit each Submittal with AIA Form G810.
- E. Sequentially number the transmittal form. Revise Submittals with original number and a sequential alphabetic suffix.
- F. Identify Project, Contractor, Subcontractor or supplier; pertinent drawing and detail number, and specification section number, as appropriate on each copy.
- G. Apply Contractor's stamp, signed or initialed certifying that review, approval, verification of Products required, field dimensions, adjacent construction Work, and coordination of information is in accordance with the requirements of the Work and Contract Documents.
- H. Deliver Submittals to Architect/Engineer at business address.
- I. Schedule Submittals to expedite the Project, and coordinate submission of related items.
- J. For each Submittal for review, allow 20 days excluding delivery time to and from the Contractor.
- K. Clearly identify variations from the Contract Documents. Regardless of the type of variation, Contractor is solely responsible for errors in the field that arise from Submittal variations from the requirements of the Contract Documents if those variations were not expressly noted to specifically identify for and describe to the reviewer the nature of the variation from the Contract Documents.
- L. Identify variations from Contract Documents and Product or system limitations that may be detrimental to successful performance of the completed Work.
- M. Correlate submitted items with specified products; clearly indicate the specified product that corresponds to each submitted item.
- N. When options or optional features available for a Product are indicated in a Submittal, and selections for those options/features are indicated in the Contract Documents, identify on the Submittal the selection indicated in the Contract Documents.
- O. Provide space for Contractor and Architect/Engineer review stamps.
- P. When revised for resubmission, using clouds, highlights or other means acceptable to the Architect, identify all changes made since previous submission. Resubmittals that do not clearly identify all changes may be delayed and/or returned to the Contractor unrevised.
- Q. The Contractor is entitled to 1 Resubmittal of any Shop Drawing, Product Data, or Closeout Submittal item rejected by the Architect or returned by the Architect for further action. Thereafter, the Contractor shall pay the cost of all further Architect's reviews of Shop Drawing, Product Data or Closeout Submittal, at a rate of \$200.00/hour. Cost of such further reviews will be deducted from the Contract Sum by Change Order.
- R. Distribute reviewed Submittals as appropriate. Instruct parties to promptly report any inability to comply with requirements.
- S. Submittals not requested will not be recognized or processed.

T. Submittal reviews may be delayed and/or Submittals may be returned unrevised for any of the following reasons:

1. Submittals submitted outside the scheduled dates of the Submittal Schedule.
2. Submittals are incomplete or are missing information.
3. Submittals are not submitted in accordance with procedures outlined in this Section (i.e. spec Section number not indicated, missing Contractor's review stamp, submitted items not correlated with specified products).

**END OF SECTION**

### ELECTRONIC DATA TRANSFER CONSENT FORM

Project Name: JOLIET JUNIOR COLLEGE - BUILDING 'S' AND BUILDING 'B' PIPING MODIFICATIONS  
1215 HOUBOLT ROAD  
JOLIET, ILLINOIS 60431

Project No.: 24-292-1575

Owner: JOLIET JUNIOR COLLEGE

Your Work: \_\_\_\_\_

KLUBER, INC. (hereinafter referred to as "Kluber") an Illinois corporation, is providing electronic data to you solely at your request and for your convenience. By accepting and opening any of the electronic data files, you agree that Kluber bears no liability for the data or its transmission to you and that you are solely liable for any and all claims referring or relating to any and all products you, or your Subcontractors, may generate with the data.

You acknowledge that you have a limited non-exclusive license to use the information solely in connection with your work on the project captioned above, and that Kluber retains all rights, including copyright, to the data.

Acknowledged by: \_\_\_\_\_  
(Printed Name) (Signature)

Company: \_\_\_\_\_

Date: \_\_\_\_\_ Email: \_\_\_\_\_

Architectural Floor Plans are transmitted for the contractors' use as backgrounds for shop drawings and as-built drawings, and, as such, contain graphic information for column grid, walls, floors, stairs, doors, windows, room numbers, ceiling grid, lights, diffusers and sprinkler heads where indicated on Bid Documents. Plans do not contain title blocks, keynotes, schedules, mechanical ductwork and equipment, electrical device symbols, circuit numbers and home runs, plumbing equipment, piping runs and riser diagrams, and architectural/engineering text and details. Plans depict entire floors and are not formatted, partial plans as depicted in the Bidding Documents. Files are provided in R2013 .DWG format.)

**SECTION 01 41 00  
REGULATORY REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. General.
- B. Definitions.
- C. Quality Assurance.
- D. Regulatory Requirements.

**1.02 RELATED SECTIONS**

- A. Section 01 42 00 - References.

**1.03 GENERAL**

- A. Comply with all applicable laws, rules, regulations, codes and ordinances.
- B. If the Contractor observes that the Contract Documents may be at variance with specified codes, notify the Architect/Engineer immediately. Architect/Engineer shall issue all changes in accordance with the General Conditions.
- C. It shall not be the Contractor's primary responsibility to make certain that the Contract Documents are in accordance with all applicable laws, rules and regulations, however, when the Contractor performs work knowing or having reason to know that the work in question is contrary to applicable laws, rules, and regulations, and fails to notify the Architect/Engineer, the Contractor shall pay all costs arising therefrom.

**1.04 DEFINITIONS**

- A. Definitions:
  - 1. Codes: Codes are statutory requirements, rules or regulations of governmental entities.
  - 2. Standards: Standards are requirements that have been established as accepted criteria, set general consent.

**1.05 QUALITY ASSURANCE**

- A. The Architect/Engineer has designed the project to applicable code requirements and has copies of said codes available for the Contractor's inspection.
- B. The Contractor shall:
  - 1. Ensure that copies of codes and standards referenced herein or specified in individual specifications sections are available to Contractor's personnel, agents, and Sub-Contractors.
  - 2. Ensure that Contractor's personnel, agents, and Sub-Contractors are familiar with the workmanship and requirements of applicable codes and standards.

**1.06 REGULATORY REQUIREMENTS**

- A. Source and Requirements: Verify amendments with local code officials.
  - 1. Illinois Community College Board code requirements:
    - a. ICC International Building Code, 2018 Edition.

- b. ICC International Mechanical Code, 2018 Edition.
  - c. National Electrical Code, 2020 Edition.
  - d. NFPA No. 101 - Life Safety Code, 2018 Edition.
2. State code requirements:
- a. Illinois Department of Public Health (IDPH):
    - 1) Illinois Plumbing Code (Illinois Administrative Code, Title 77, Chapter I, Subchapter r, Part 890).
  - b. Illinois Environmental Protection Agency (IEPA):
    - 1) Air-Pollution Standards.
    - 2) Noise Pollution Standards.
    - 3) Water Pollution Standards.
    - 4) Public Water Supplies
    - 5) Solid Waste Standards.
  - c. Illinois State Fire Marshal (OSFM):
    - 1) Illinois Rules & Regulations for Fire Prevention & Safety (Illinois Administrative Code 100).
3. Information and Requirements for Utility Services: Local utility companies.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**



## SECTION 01 42 00 REFERENCES

### PART 1 GENERAL

#### 1.01 SECTION INCLUDES

- A. Drawing symbols, abbreviations and acronyms.
- B. Definitions of terms used throughout the Contract Documents.
- C. Explanation of specification format and content.
- D. Requirements relating to referenced standards.
- E. Applicability of referenced standards.
- F. List of industry organizations and certain of their respective documents.

#### 1.02 DRAWING SYMBOLS AND CONVENTIONS

- A. Abbreviations and graphic symbols are defined on the General Notes, Symbols & Abbreviations sheet of the drawings.
- B. Generally, symbols used on the mechanical and electrical drawings conform to those recommended by ASHRAE, though, where appropriate, these symbols are supplemented by more specific symbols as recommended by ASME, ASPE, or the IEEE.

#### 1.03 DEFINITIONS

- A. Where the terms "indicated", "noted", "scheduled", "shown", or "specified" are used it is to help locate the reference; no limitation on location is intended except as specifically noted.
- B. Where the terms "directed", "requested", "authorized", "approved", are used as in "directed by the Architect/Engineer", no implied meaning shall be construed to extend the Architect/Engineer's responsibilities into the Contractor's purview of construction supervision.
- C. Where the term "approved" is used in conjunction with the Architect/Engineer's action on submittals, requests or applications it is limited to the duties of the Architect/Engineer as described in the Agreement, and the General and Supplemental Conditions of the Contract. Such use of the term "approval" shall not limit or release the Contractor from his responsibility to fulfill Contract requirements.
- D. Where the term "regulations" is used it means all applicable statutes, laws, ordinances, and orders issued by authorities having jurisdiction, as well as construction industry standards, rules, or conventions that address performance of the Work.
- E. Where the term "furnish" is used it means supply, deliver, and unload to the construction site ready for assembly and incorporation into the Work.
- F. Where the term "install" is used it is meant to describe operations at the job site to include unloading, assembling, placing, anchoring, finishing, protecting, cleaning and all other similar operations required to fully incorporate an item into the Work.
- G. Where the term "provide" is used it means "furnish and install" as defined above.

- H. The "Project Site" is the space available to the Contractor for performance of construction activities. The Project Site may be for the exclusive use of the Contractor and his activities or may be used in conjunction with others with others performing other construction or related activities on the Project. The Extent of the Project Site is indicated on the Drawings.

#### **1.04 SPECIFICATION FORMAT AND CONTENT**

- A. These Specifications are based on the Construction Specification Institute's 49 Division format and numbering system.
- B. Language used in the Specifications and other Contract Documents is an abbreviated type. Implied words and meanings will be appropriately interpreted.
- C. Requirements expressed in imperative and streamlined language are to be performed by the Contractor. At certain locations in the text, subjective language may be used to describe responsibilities that must be fulfilled indirectly by the Contractor or others.
1. Whenever a colon (:) is used within a sentence or phrase, it shall be construed to mean the words "shall be".
- D. Use of certain terms such as "carpentry" is not intended to imply that certain activities must be performed by accredited or unionized individuals of a corresponding generic name. The Specifications do, however, require that certain construction activities shall be performed by specialists who are recognized experts in the operations to be performed. Specialists shall be used for said activities, however the final responsibility for fulfilling the requirements of the Contract remains the Contractor's.

#### **1.05 QUALITY ASSURANCE**

- A. For products or workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Conform to reference standard of date of issue specified in this section, except where a specific date is established by applicable code.
- C. Obtain copies of standards when required by the Contract Documents.
- D. Maintain copy at project site during submittals, planning, and progress of the specific work, until Substantial Completion.
- E. Should specified reference standards conflict with Contract Documents, request clarification from the Architect/Engineer before proceeding.
- F. Neither the contractual relationships, duties, or responsibilities of the parties in Contract nor those of the Architect/Engineer shall be altered by the Contract Documents by mention or inference otherwise in any reference document.

#### **1.06 APPLICABILITY OF INDUSTRY STANDARDS**

- A. Construction industry standards shall have the same force and effect as if bound or copied directly in the Contract Documents, except where more stringent requirements are specified. All such applicable standards are made a part of the Contract Documents by reference.

1. Where compliance with two or more standards are referenced and conflicting requirements for quality or quantities occur, comply with the more stringent requirements. Refer questions regarding apparently conflicting standards to the Architect for a decision before proceeding.
2. The standard of quality or quantity levels specified, shown, or referenced shall be the minimum to be provided or performed. Refer questions regarding standards of minimum quality or quantity to the Architect before proceeding.

#### **1.07 CONSTRUCTION INDUSTRY ORGANIZATIONS AND DOCUMENTS**

- A. AABC -- ASSOCIATED AIR BALANCE COUNCIL
- B. AISC -- AMERICAN INSTITUTE OF STEEL CONSTRUCTION, INC.
- C. ANSI -- AMERICAN NATIONAL STANDARDS INSTITUTE
- D. ASHRAE -- AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS, INC.
- E. ASME -- THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
- F. ASTM -- AMERICAN SOCIETY FOR TESTING AND MATERIALS
- G. AWS -- AMERICAN WELDING SOCIETY
- H. CPSC -- CONSUMER PRODUCTS SAFETY COMMISSION
- I. FM -- FACTORY MUTUAL RESEARCH CORPORATION
- J. ICC -- INTERNATIONAL CODE COUNCIL, INC.
- K. IEEE -- INSTITUTE OF ELECTRICAL AND ELECTRONIC ENGINEERS
- L. ISO -- INTERNATIONAL STANDARDS ORGANIZATION
- M. MSS -- MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY, INC.
- N. NAIMA -- NORTH AMERICAN INSULATION MANUFACTURERS ASSOCIATION
- O. NCMA -- NATIONAL CONCRETE MASONRY ASSOCIATION
- P. NEBB -- NATIONAL ENVIRONMENTAL BALANCING BUREAU
- Q. NEMA -- NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION
- R. NFPA -- NATIONAL FIRE PROTECTION ASSOCIATION
- S. SMACNA -- SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION, INC.
- T. SSPC -- THE SOCIETY FOR PROTECTIVE COATINGS
- U. SWRI -- SEALANT, WATERPROOFING AND RESTORATION INSTITUTE
- V. UL -- UNDERWRITERS LABORATORIES INC.

**1.08 UNITED STATES GOVERNMENT AND RELATED AGENCIES/DOCUMENTS**

- A. CFR -- CODE OF FEDERAL REGULATIONS
- B. CPSC -- CONSUMER PRODUCTS SAFETY COMMISSION
- C. EPA -- ENVIRONMENTAL PROTECTION AGENCY
- D. FS -- FEDERAL SPECIFICATIONS AND STANDARDS (General Services Administration)
- E. GSA -- U.S. GENERAL SERVICES ADMINISTRATION

**1.09 STATE GOVERNMENT AND RELATED AGENCIES/DOCUMENTS**

- A. CDB -- ILLINOIS CAPITAL DEVELOPMENT BOARD
- B. IDOL -- ILLINOIS DEPARTMENT OF LABOR
- C. IDPH -- ILLINOIS DEPARTMENT OF PUBLIC HEALTH
- D. IEPA -- ILLINOIS ENVIRONMENTAL PROTECTION AGENCY
- E. OSFM -- OFFICE OF THE ILLINOIS STATE FIRE MARSHAL.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

## **SECTION 01 60 00 PRODUCT REQUIREMENTS**

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

- A. General product requirements.
- B. Transportation, handling, storage and protection.
- C. Product option requirements.
- D. Maintenance materials, including extra materials, spare parts, tools, and software.

#### **1.02 SUBMITTALS**

- A. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- B. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.

### **PART 2 PRODUCTS**

#### **2.01 NEW PRODUCTS**

- A. Provide new products unless specifically required or permitted by the Contract Documents.
- B. Designed, manufactured, and tested in accordance with industry standards.

#### **2.02 PRODUCT OPTIONS**

- A. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers: Use a product of one of the manufacturers named and meeting specifications, no options or substitutions allowed.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.

#### **2.03 MAINTENANCE MATERIALS**

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver to Project site and place in location directed by Owner's representative; obtain Owner's signature on receipt for delivery prior to final payment. Submit signed receipts with Closeout Submittals.

## **PART 3 EXECUTION**

### **3.01 TRANSPORTATION AND HANDLING**

- A. Package products for shipment in manner to prevent damage; for equipment, package to avoid loss of factory calibration.
- B. If special precautions are required, attach instructions prominently and legibly on outside of packaging.
- C. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- D. Transport and handle products in accordance with manufacturer's instructions.
- E. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- F. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- G. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage, and to minimize handling.
- H. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

### **3.02 STORAGE AND PROTECTION**

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.
- D. Store sensitive products in weather tight, climate controlled, enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Protect products from damage or deterioration due to construction operations, weather, precipitation, humidity, temperature, sunlight and ultraviolet light, dirt, dust, and other contaminants.
- G. Comply with manufacturer's warranty conditions, if any.
- H. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- I. Prevent contact with material that may cause corrosion, discoloration, or staining.
- J. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.

K. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

**END OF SECTION**

## SUBSTITUTION REQUEST FORM

PROJECT: JOLIET JUNIOR COLLEGE - BUILDING 'S' AND BUILDING 'B' PIPING MODIFICATIONS

SPECIFIED ITEM: \_\_\_\_\_

Specification Section	Page	Paragraph	Description
-----------------------	------	-----------	-------------

The undersigned requests consideration of the following:

PROPOSED SUBSTITUTION: \_\_\_\_\_

Attached data includes project description, specifications, drawings, photographs, performance and test data adequate for evaluation of the request; applicable portions of the data are clearly identified.

Attached data also includes a description of changes to the Contract Documents which the proposed substitution will require for its proper installation.

The undersigned certifies that the following paragraphs, unless modified by attachments, are correct:

1. The proposed substitution does not affect dimensions shown on drawings.
2. The undersigned will pay for changes to the building design, including engineering design, detailing, and construction costs caused by the requested substitution.
3. The proposed substitution will have no adverse effect on other trades, the construction schedule, or specified warranty requirements.
4. Maintenance and service parts will be locally available for the proposed substitution.

The undersigned further states that the function, appearance, and quality of the proposed substitution are equivalent or superior to the specified item.

\_\_\_\_\_  
 Printed Name

\_\_\_\_\_  
 Signature

\_\_\_\_\_  
 Date

\_\_\_\_\_  
 Firm

\_\_\_\_\_  
 Telephone

\_\_\_\_\_  
 Email

Attachments (list): \_\_\_\_\_

For Use By The Architect/Engineer:

Accepted       Accepted As Noted

Not Accepted       Received Too Late

By: \_\_\_\_\_

Date: \_\_\_\_\_

Remarks: \_\_\_\_\_



**SECTION 01 70 00  
EXECUTION AND CLOSEOUT REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Examination, preparation, and general installation procedures.
- B. Requirements for alterations work, including selective demolition, except removal, disposal, and/or remediation of hazardous materials and toxic substances.
- C. Cutting and patching.
- D. Cleaning and protection.
- E. Starting of systems and equipment.
- F. Demonstration and instruction of Owner personnel.
- G. Closeout procedures, including Contractor's Correction Punch List, except payment procedures.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 78 00 - Closeout Submittals: Project record documents, operation and maintenance data, warranties .
- B. Section 01 79 00 - Demonstration and Training: Demonstration of products and systems to be commissioned and where indicated in specific specification sections.

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Cutting and Patching: Submit written request in advance of cutting or alteration that affects:
  - 1. Structural integrity of any element of Project.
  - 2. Integrity of weather exposed or moisture resistant element.
  - 3. Efficiency, maintenance, or safety of any operational element.
  - 4. Visual qualities of sight exposed elements.
  - 5. Work of Owner or separate Contractor.

**1.04 PROJECT CONDITIONS**

- A. Ventilate enclosed areas to assist cure of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.
- B. Dust Control: Execute work by methods to minimize raising dust from construction operations. Provide positive means to prevent air-borne dust from dispersing into atmosphere and over adjacent property.
  - 1. Provide dust-proof barriers between construction areas and areas continuing to be occupied by Owner.
- C. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.

- D. Pest and Rodent Control: Provide methods, means, and facilities to prevent pests and insects from damaging the work.
- E. Rodent Control: Provide methods, means, and facilities to prevent rodents from accessing or invading premises.
- F. Pollution Control: Provide methods, means, and facilities to prevent contamination of soil, water, and atmosphere from discharge of noxious, toxic substances, and pollutants produced by construction operations. Comply with federal, state, and local regulations.

## **1.05 COORDINATION**

- A. Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- B. Verify that utility requirements and characteristics of new operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- C. Coordinate space requirements, supports, and installation of mechanical and electrical work that are indicated diagrammatically on Drawings. Follow routing shown for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- D. In finished areas except as otherwise indicated, conceal pipes, ducts, and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- E. Coordinate completion and clean-up of work of separate sections.
- F. After Owner occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

## **PART 2 PRODUCTS**

### **2.01 PATCHING MATERIALS**

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.

- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

### **3.02 PREPARATION**

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

### **3.03 GENERAL INSTALLATION REQUIREMENTS**

- A. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- B. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- C. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- D. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- E. Make neat transitions between different surfaces, maintaining texture and appearance.

### **3.04 ALTERATIONS**

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
  - 1. Verify that construction and utility arrangements are as indicated.
  - 2. Report discrepancies to Architect/Engineer before disturbing existing installation.
  - 3. Beginning of alterations work constitutes acceptance of existing conditions.
- B. Keep areas in which alterations are being conducted separated from other areas that are still occupied.
- C. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
  - 1. Where openings in exterior enclosure exist, provide construction to make exterior enclosure weatherproof.
  - 2. Insulate existing ducts or pipes that are exposed to outdoor ambient temperatures by alterations work.
- D. Remove existing work as indicated and as required to accomplish new work.
  - 1. Remove items indicated on Drawings.
  - 2. Relocate items indicated on Drawings.

3. Where new surface finishes are to be applied to existing work, perform removals, patch, and prepare existing surfaces as required to receive new finish; remove existing finish if necessary for successful application of new finish.
  4. Where new surface finishes are not specified or indicated, patch holes and damaged surfaces to match adjacent finished surfaces as closely as possible.
- E. Services (Including but not limited to HVAC and Electrical): Remove, relocate, and extend existing systems to accommodate new construction.
1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components; if necessary, modify installation to allow access or provide access panel.
  2. Where existing systems or equipment are not active and Contract Documents require reactivation, put back into operational condition; repair supply, distribution, and equipment as required.
  3. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
    - a. Disable existing systems only to make switchovers and connections; minimize duration of outages.
    - b. Provide temporary connections as required to maintain existing systems in service.
  4. Verify that abandoned services serve only abandoned facilities.
  5. Remove abandoned pipe, ducts, conduits, and equipment; remove back to source of supply where possible, otherwise cap stub and tag with identification; patch holes left by removal using materials specified for new construction.
- F. Protect existing work to remain.
1. Prevent movement of structure; provide shoring and bracing if necessary.
  2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
  3. Repair adjacent construction and finishes damaged during removal work.
- G. Adapt existing work to fit new work: Make as neat and smooth transition as possible.
- H. Patching: Where the existing surface is not indicated to be refinished, patch to match the surface finish that existed prior to cutting. Where the surface is indicated to be refinished, patch so that the substrate is ready for the new finish.
- I. Refinish existing surfaces as indicated:
1. Where rooms or spaces are indicated to be refinished, refinish all visible existing surfaces to remain to the specified condition for each material, with a neat transition to adjacent finishes.
  2. If mechanical or electrical work is exposed accidentally during the work, re-cover and refinish to match.
- J. Remove demolition debris and abandoned items from alterations areas and dispose of off-site; do not burn or bury.
- K. Do not begin new construction in alterations areas before demolition is complete.
- L. Comply with all other applicable requirements of this section.

### 3.05 CUTTING AND PATCHING

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. See Alterations article above for additional requirements.
- C. Perform whatever cutting and patching is necessary to:
  - 1. Complete the work.
  - 2. Fit products together to integrate with other work.
  - 3. Provide openings for penetration of mechanical, electrical, and other services.
  - 4. Match work that has been cut to adjacent work.
  - 5. Repair areas adjacent to cuts to required condition.
  - 6. Repair new work damaged by subsequent work.
  - 7. Remove samples of installed work for testing when requested.
  - 8. Remove and replace defective and non-conforming work.
- D. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to original condition.
- E. Employ original installer to perform cutting for weather exposed and moisture resistant elements, and sight exposed surfaces.
- F. Cut rigid materials using masonry saw or core drill. Pneumatic tools not allowed without prior approval.
- G. Restore work with new products in accordance with requirements of Contract Documents.
- H. Fit work air tight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.
- I. At penetrations of fire rated walls, partitions, ceiling, or floor construction, completely seal voids with fire rated material , to full thickness of the penetrated element.
- J. Patching:
  - 1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
  - 2. Match color, texture, and appearance.
  - 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

### 3.06 PROTECTION OF INSTALLED WORK

- A. Protect installed work from damage by construction operations.
- B. Provide special protection where specified in individual specification sections.
- C. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- D. Provide protective coverings at walls, projections, jambs, sills, and soffits of openings.
- E. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects, by protecting with durable sheet materials.

- F. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.
- G. Remove protective coverings when no longer needed; reuse or recycle coverings if possible.

### **3.07 SYSTEM STARTUP**

- A. Coordinate schedule for start-up of various equipment and systems.
- B. Verify that each piece of equipment or system has been checked for proper lubrication, drive rotation, belt tension, control sequence, and for conditions that may cause damage.
- C. Verify tests, meter readings, and specified electrical characteristics agree with those required by the equipment or system manufacturer.
- D. Verify that wiring and support components for equipment are complete and tested.
- E. Execute start-up under supervision of applicable Contractor personnel and manufacturer's representative in accordance with manufacturers' instructions.
- F. Submit a written report that equipment or system has been properly installed and is functioning correctly.

### **3.08 DEMONSTRATION AND INSTRUCTION**

- A. See Section 01 79 00 - Demonstration and Training.

### **3.09 ADJUSTING**

- A. Adjust operating products and equipment to ensure smooth and unhindered operation.

### **3.10 FINAL CLEANING**

- A. Execute final cleaning prior to final project assessment.
  - 1. Clean areas to be occupied by Owner prior to final completion before Owner occupancy.
- B. Use cleaning materials that are nonhazardous.
- C. Remove all labels that are not permanent. Do not paint or otherwise cover fire test labels or nameplates on mechanical and electrical equipment.
- D. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- E. Clean debris from roofs.
- F. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

### **3.11 CLOSEOUT PROCEDURES**

- A. See Section 01 77 00 for additional requirements.
- B. Make submittals that are required by governing or other authorities.
- C. Accompany Project Coordinator on preliminary inspection to determine items to be listed for completion or correction in the Contractor's Correction Punch List for Contractor's Notice of

Substantial Completion.

- D. Notify Architect/Engineer when work is considered ready for Architect/Engineer's Substantial Completion inspection.
- E. Submit written certification containing Contractor's Correction Punch List, that Contract Documents have been reviewed, work has been inspected, and that work is complete in accordance with Contract Documents and ready for Architect/Engineer's Substantial Completion inspection.
- F. Conduct Substantial Completion inspection and create Final Correction Punch List containing Architect/Engineer's and Contractor's comprehensive list of items identified to be completed or corrected and submit to Architect/Engineer.
- G. Correct items of work listed in Final Correction Punch List and comply with requirements for access to Owner-occupied areas.
- H. Notify Architect/Engineer when work is considered finally complete and ready for Architect/Engineer's Substantial Completion final inspection.
- I. Complete items of work determined by Architect/Engineer listed in executed Certificate of Substantial Completion.

**END OF SECTION**

**SECTION 01 77 00  
CLOSEOUT PROCEDURES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES:**

- A. Substantial Completion Procedures.
- B. Final Completion Procedures.

**1.02 RELATED REQUIREMENTS:**

- A. Section 01 78 00 - Closeout Submittals.

**1.03 SUBSTANTIAL COMPLETION PROCEDURES**

- A. Substantial Completion Procedures:
  - 1. When the Work or a portion of the Work is considered to be substantially complete, the Contractor inspects the project and prepares a comprehensive list of outstanding items to be completed or corrected, Initial Punch List.
  - 2. Contractor submits notice of Substantial Completion.
  - 3. Contractor completes items on the Initial Punch List.
  - 4. Architect/Engineer inspects the project to verify substantial completion and prepares a Final Punch List.
  - 5. Architect/Engineer prepares Certificate of Substantial Completion, acceptance is required by Owner and Contractor.

**1.04 FINAL COMPLETION PROCEDURES**

- A. Final Completion Procedures:
  - 1. When items on Initial and Final Punch Lists are complete, the Contractor submits notice of final completion and final application for payment.
  - 2. Contractor submits Final Closeout Submittals as specified in Section 01 78 00.
  - 3. Architect inspects project and verifies the Work is acceptable and conforms with the Contract Documents.
  - 4. Architect processes final application for payment and closeout submittals.

**1.05 CORRECTION PERIOD**

- A. Correction Period commences on the date of Substantial Completion and expires one year from that date.
- B. Owner: document non-conforming or defective work over course of Correction Period. Notify Contractor in writing of nonconforming or defective work. Copy Architect/Engineer.
  - 1. Life safety issues requiring immediate corrective work: Contact Contractor for action.

**PART 2 PRODUCTS - NOT USED.**

**PART 3 EXECUTION - NOT USED.**

**END OF SECTION**



**SECTION 01 78 00  
CLOSEOUT SUBMITTALS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Project Record Documents.
- B. Operation and Maintenance Data.
- C. Warranties and bonds.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 30 00 - Administrative Requirements: Submittals procedures, shop drawings, product data, and samples.
- B. Section 01 70 00 - Execution and Closeout Requirements: Contract closeout procedures.
- C. Individual Product Sections: Specific requirements for operation and maintenance data.
- D. Individual Product Sections: Warranties required for specific products or Work.

**1.03 SUBMITTALS**

- A. Project Record Documents: Submit documents to Architect/Engineer with claim for final Application for Payment.
- B. Operation and Maintenance Data:
  - 1. Submit preliminary draft or proposed formats and outlines of contents before start of Work. Architect/Engineer will review draft and return with comments.
  - 2. For equipment, or component parts of equipment put into service during construction and operated by Owner, submit completed documents within ten days after acceptance.
  - 3. Submit completed documents 15 days prior to final inspection. This copy will be reviewed and returned after final inspection, with Architect/Engineer comments. Revise content as required prior to final submission.
  - 4. Submit revised final documents in final in PDF file format on USB flash drive form within 10 days after final inspection.
- C. Warranties and Bonds:
  - 1. For equipment or component parts of equipment put into service during construction with Owner's permission, submit documents within 10 days after acceptance.
  - 2. Make other submittals within 10 days after Date of Substantial Completion, prior to final Application for Payment.
  - 3. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 10 days after acceptance, listing the date of acceptance as the beginning of the warranty period.

**PART 2 PRODUCTS - NOT USED****PART 3 EXECUTION****3.01 PROJECT RECORD DOCUMENTS**

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
  - 1. Drawings.
  - 2. Specifications.
  - 3. Addenda.
  - 4. Change Orders and other modifications to the Contract.
  - 5. Reviewed shop drawings, product data, and samples.
  - 6. Manufacturer's instruction for assembly, installation, and adjusting.
- B. Ensure entries are complete and accurate, enabling future reference by Owner.
- C. Store record documents separate from documents used for construction.
- D. Record information concurrent with construction progress.
- E. Specifications: Legibly mark and record at each product section description of actual products installed, including the following:
  - 1. Manufacturer's name and product model and number.
  - 2. Product substitutions or alternates utilized.
  - 3. Changes made by Addenda and modifications.
- F. Record Drawings and Shop Drawings: Legibly mark each item to record actual construction including:
  - 1. Measured depths of foundations in relation to finish first floor datum.
  - 2. Measured horizontal and vertical locations of underground utilities and appurtenances, referenced to permanent surface improvements.
  - 3. Measured locations of internal utilities and appurtenances concealed in construction, referenced to visible and accessible features of the Work.
  - 4. Field changes of dimension and detail.
  - 5. Details not on original Contract drawings.

**3.02 OPERATION AND MAINTENANCE DATA**

- A. Source Data: For each product or system, list names, addresses and telephone numbers of Subcontractors and suppliers, including local source of supplies and replacement parts.
- B. Product Data: Mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- C. Drawings: Supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Do not use Project Record Documents as maintenance drawings.
- D. Typed Text: As required to supplement product data. Provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.

### 3.03 OPERATION AND MAINTENANCE DATA FOR MATERIALS AND FINISHES

- A. For Each Product, Applied Material, and Finish:
  - 1. Product data, with catalog number, size, composition, and color and texture designations.
  - 2. Information for re-ordering custom manufactured products.
- B. Instructions for Care and Maintenance: Manufacturer's recommendations for cleaning agents and methods, precautions against detrimental cleaning agents and methods, and recommended schedule for cleaning and maintenance.
- C. Moisture protection and weather-exposed products: Include product data listing applicable reference standards, chemical composition, and details of installation. Provide recommendations for inspections, maintenance, and repair.
- D. Additional information as specified in individual product specification sections.
- E. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.

### 3.04 OPERATION AND MAINTENANCE DATA FOR EQUIPMENT AND SYSTEMS

- A. For Each Item of Equipment and Each System:
  - 1. Description of unit or system, and component parts.
  - 2. Identify function, normal operating characteristics, and limiting conditions.
  - 3. Include performance curves, with engineering data and tests.
  - 4. Complete nomenclature and model number of replaceable parts.
- B. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.
- C. Panelboard Circuit Directories: Provide electrical service characteristics, controls, and communications; typed.
- D. Include color coded wiring diagrams as installed.
- E. Operating Procedures: Include start-up, break-in, and routine normal operating instructions and sequences. Include regulation, control, stopping, shut-down, and emergency instructions. Include summer, winter, and any special operating instructions.
- F. Maintenance Requirements: Include routine procedures and guide for preventative maintenance and troubleshooting; disassembly, repair, and reassembly instructions; and alignment, adjusting, balancing, and checking instructions.
- G. Provide servicing and lubrication schedule, and list of lubricants required.
- H. Include manufacturer's printed operation and maintenance instructions.
- I. Include sequence of operation by controls manufacturer.
- J. Provide original manufacturer's parts list, illustrations, assembly drawings, and diagrams required for maintenance.

- K. Provide control diagrams by controls manufacturer as installed.
- L. Provide charts of valve tag numbers, with location and function of each valve, keyed to flow and control diagrams.
- M. Provide list of original manufacturer's spare parts, current prices, and recommended quantities to be maintained in storage.
- N. Include test and balancing reports.
- O. Additional Requirements: As specified in individual product specification sections.

### **3.05 ASSEMBLY OF OPERATION AND MAINTENANCE MANUALS**

- A. Assemble operation and maintenance data into PDF file "manual" for Owner's personnel use, with data arranged in the same sequence as, and bookmarked by, the specification sections.
  - 1. Media: USB flash drive of capacity sufficient to store entire PDF file, fragmented.
  - 2. Attach a tag or label flash drive with Project name, date, and the title "O&M Manual".
- B. Where systems involve more than one specification section, provide separate bookmark for each system.
- C. Prepare instructions and data by personnel experienced in maintenance and operation of described products.
- D. Prepare data in the form of an instructional manual.
- E. Cover Page: Populate the first page of the PDF file with: printed title "OPERATION AND MAINTENANCE MANUAL"; identify title of Project; identify subject matter of contents.
- F. Project Directory: Beginning on the second page of the PDF file; provide Title and address of Project; names, addresses, and telephone numbers of Architect/Engineer, Consultants, Contractor and subcontractors, with names of responsible parties.
- G. Table of Contents: List every item identified by a bookmark, using the same identification as in the title of the bookmark.
- H. Bookmarks: Bookmark each separate product and system; identify the contents in the title of the bookmark; on the bookmarked page provide a description of product and major component parts of equipment.
- I. Content: Manufacturer's printed data, legibly scanned, in color where applicable, at 300 dpi resolution.
- J. Drawings: Legibly scanned, in color where applicable, at 300 dpi resolution; PDF file page size to match native sheet size of original drawing.
- K. Arrangement of Contents: Organize each volume in parts as follows:
  - 1. Project Directory.
  - 2. Table of Contents, of all volumes, and of this volume.
  - 3. Operation and Maintenance Data: Arranged by system, then by product category.
    - a. Source data.
    - b. Product data, shop drawings, and other submittals.
    - c. Operation and maintenance data.

- d. Field quality control data.
- e. Warranties and bonds.

### **3.06 WARRANTIES AND BONDS**

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with Owner's permission, leave date of beginning of time of warranty until Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.
- E. Include color, 300 dpi resolution scans of each in Operation and Maintenance Manual PDF file, bookmarked indexed separately in Table of Contents.
- F. Manual: Bind original copies of warranties and bonds in commercial quality 8-1/2 by 11 inch three D side ring binders with durable plastic covers.
- G. Cover: Identify each binder with typed or printed title WARRANTIES AND BONDS, with title of Project; name, address and telephone number of Contractor and equipment supplier; and name of responsible company principal.
- H. Table of Contents: Neatly typed, in the sequence of the Table of Contents of the Project Manual, with each item identified with the number and title of the specification section in which specified, and the name of product or work item.
- I. Separate each warranty or bond with index tab sheets keyed to the Table of Contents listing. Provide full information, using separate typed sheets as necessary. List Subcontractor, supplier, and manufacturer, with name, address, and telephone number of responsible principal.

**END OF SECTION**

## SECTION 01 79 00 DEMONSTRATION AND TRAINING

### PART 1 GENERAL

#### 1.01 SUMMARY

- A. Demonstration of products and systems where indicated in specific specification sections.
- B. Training of Owner personnel in operation and maintenance is required for:
  - 1. All software-operated systems.
  - 2. HVAC systems and equipment.
  - 3. Electrical systems and equipment.

#### 1.02 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Training Plan: Owner will designate personnel to be trained; tailor training to needs and skill-level of attendees.
  - 1. Submit to Architect/Engineer for transmittal to Owner.
  - 2. Submit not less than four weeks prior to start of training.
  - 3. Revise and resubmit until acceptable.
  - 4. Provide an overall schedule showing all training sessions.
  - 5. Include at least the following for each training session:
    - a. Identification, date, time, and duration.
    - b. Description of products and/or systems to be covered.
    - c. Name of firm and person conducting training; include qualifications.
    - d. Intended audience, such as job description.
    - e. Objectives of training and suggested methods of ensuring adequate training.
    - f. Methods to be used, such as classroom lecture, live demonstrations, hands-on, etc.
    - g. Media to be used, such as slides, hand-outs, etc.
    - h. Training equipment required, such as projector, projection screen, etc., to be provided by Contractor.
- C. Training Reports:
  - 1. Identification of each training session, date, time, and duration.
  - 2. Sign-in sheet showing names and job titles of attendees.
  - 3. List of attendee questions and written answers given, including copies of and references to supporting documentation required for clarification; include answers to questions that could not be answered in original training session.

#### 1.03 QUALITY ASSURANCE

- A. Instructor Qualifications: Familiar with design, operation, maintenance and troubleshooting of the relevant products and systems.
  - 1. Provide as instructors the most qualified trainer of those contractors and/or installers who actually supplied and installed the systems and equipment.
  - 2. Where a single person is not familiar with all aspects, provide specialists with necessary qualifications.

**PART 2 PRODUCTS - NOT USED****PART 3 EXECUTION****3.01 DEMONSTRATION - GENERAL**

- A. Demonstrations conducted during system start-up do not qualify as demonstrations for the purposes of this section, unless approved in advance by Owner.
- B. Demonstration may be combined with Owner personnel training if applicable.
- C. Operating Equipment and Systems: Demonstrate operation in all modes, including start-up, shut-down, seasonal changeover, emergency conditions, and troubleshooting, and maintenance procedures, including scheduled and preventive maintenance.
  - 1. Perform demonstrations not less than two weeks prior to Substantial Completion.
  - 2. For equipment or systems requiring seasonal operation, perform demonstration for other season within six months.
- D. Non-Operating Products: Demonstrate cleaning, scheduled and preventive maintenance, and repair procedures.
  - 1. Perform demonstrations not less than two weeks prior to Substantial Completion.

**3.02 TRAINING - GENERAL**

- A. Conduct training on-site unless otherwise indicated.
- B. Owner will provide classroom and seating at no cost to Contractor.
- C. Provide training in minimum two hour segments.
- D. Training schedule will be subject to availability of Owner's personnel to be trained; re-schedule training sessions as required by Owner; once schedule has been approved by Owner failure to conduct sessions according to schedule will be cause for Owner to charge Contractor for personnel "show-up" time.
- E. Review of Facility Policy on Operation and Maintenance Data: During training discuss:
  - 1. The location of the O&M manuals and procedures for use and preservation; backup copies.
  - 2. Typical contents and organization of all manuals, including explanatory information, system narratives, and product specific information.
  - 3. Typical uses of the O&M manuals.
- F. Product- and System-Specific Training:
  - 1. Review the applicable O&M manuals.
  - 2. For systems, provide an overview of system operation, design parameters and constraints, and operational strategies.
  - 3. Review instructions for proper operation in all modes, including start-up, shut-down, seasonal changeover and emergency procedures, and for maintenance, including preventative maintenance.
  - 4. Provide hands-on training on all operational modes possible and preventive maintenance.
  - 5. Emphasize safe and proper operating requirements; discuss relevant health and safety issues and emergency procedures.
  - 6. Discuss common troubleshooting problems and solutions.

7. Discuss any peculiarities of equipment installation or operation.
  8. Discuss warranties and guarantees, including procedures necessary to avoid voiding coverage.
  9. Review recommended tools and spare parts inventory suggestions of manufacturers.
  10. Review spare parts and tools required to be furnished by Contractor.
  11. Review spare parts suppliers and sources and procurement procedures.
- G. Be prepared to answer questions raised by training attendees; if unable to answer during training session, provide written response within three days.

**END OF SECTION**



## **SECTION 02 41 00 DEMOLITION**

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

- A. Building demolition excluding removal of hazardous materials and toxic substances.
- B. Selective demolition of building elements for alteration purposes.
- C. Abandonment and removal of existing utilities and utility structures.

#### **1.02 RELATED REQUIREMENTS**

- A. Section 01 10 00 - Summary: Limitations on Contractor's use of site and premises.
- B. Section 01 10 00 - Summary: Description of items to be salvaged or removed for re-use by Contractor.
- C. Section 01 60 00 - Product Requirements: Handling and storage of items removed for salvage and relocation.
- D. Section 01 70 00 - Execution and Closeout Requirements: Project conditions; protection of bench marks, survey control points, and existing construction to remain; reinstallation of removed products; temporary bracing and shoring.

#### **1.03 REFERENCE STANDARDS**

- A. 29 CFR 1926 - Safety and Health Regulations for Construction; Current Edition.
- B. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2022, with Errata (2021).

#### **1.04 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Demolition Plan: Submit demolition plan as required by OSHA and local AHJs.
  - 1. Indicate extent of demolition, removal sequencing, bracing and shoring, and location and construction of barricades and fences.
  - 2. Demolition firm qualifications.
- C. Project Record Documents: Accurately record actual locations of capped and active utilities and subsurface construction.

#### **1.05 QUALITY ASSURANCE**

- A. Demolition Firm Qualifications: Company specializing in the type of work required.
  - 1. Minimum of five years of documented experience.

**PART 2 PRODUCTS -- NOT USED****PART 3 EXECUTION****3.01 DEMOLITION**

- A. Remove items indicated, for salvage, relocation, recycling, and removal.

**3.02 GENERAL PROCEDURES AND PROJECT CONDITIONS**

- A. Comply with requirements in Section 01 70 00.
- B. Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.
1. Obtain required permits.
  2. Comply with applicable requirements of NFPA 241.
  3. Use of explosives is not permitted.
  4. Take precautions to prevent catastrophic or uncontrolled collapse of elements to be removed; do not allow worker or public access within range of potential collapse of unstable elements.
  5. Provide, erect, and maintain temporary barriers and security devices.
  6. Use physical barriers to prevent access to areas that could be hazardous to workers or the public.
  7. Conduct operations to minimize effects on and interference with adjacent elements and occupants.
  8. Do not close or obstruct roadways or sidewalks without permits from authority having jurisdiction.
  9. Conduct operations to minimize obstruction of public and private entrances and exits. Do not obstruct required exits at any time. Protect persons using entrances and exits from removal operations.
- C. Do not begin removal until receipt of notification to proceed from Owner.
- D. Do not begin removal until built elements to be salvaged or relocated have been removed.
- E. Protect existing elements to remain in place and not removed.
1. Provide bracing and shoring.
  2. Prevent movement or settlement of adjacent elements.
  3. Stop work immediately if adjacent elements appear to be in danger.
- F. Minimize production of dust due to demolition operations. Do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.
- G. Hazardous Materials:
1. If hazardous materials are discovered during removal operations, stop work and notify Architect/Engineer and Owner; hazardous materials include regulated asbestos containing materials, lead, PCBs, and mercury.
- H. Perform demolition in a manner that maximizes salvage and recycling of materials.
1. Dismantle existing construction and separate materials.
  2. Set aside reusable, recyclable, and salvageable materials; store and deliver to collection point or point of reuse.

### 3.03 EXISTING UTILITIES

- A. Coordinate work with utility companies. Notify utilities before starting work, comply with their requirements, and obtain required permits.
- B. Protect existing utilities to remain from damage.
- C. Do not disrupt public utilities without permit from authority having jurisdiction.
- D. Do not close, shut off, or disrupt existing life safety systems that are in use without at least 7 days prior written notification to Owner.
- E. Do not close, shut off, or disrupt existing utility branches or take-offs that are in use without at least 3 days prior written notification to Owner.
- F. Locate and mark utilities to remain; mark using highly visible tags or flags, with identification of utility type; protect from damage due to subsequent construction, using substantial barricades if necessary.
- G. Remove exposed piping, valves, meters, equipment, supports, and foundations of disconnected and abandoned utilities.

### 3.04 SELECTIVE DEMOLITION FOR ALTERATIONS

- A. Existing construction and utilities indicated on drawings are based on casual field observation and existing record documents only.
  - 1. Verify construction and utility arrangements are as indicated.
  - 2. Report discrepancies to Architect/Engineer before disturbing existing installation.
  - 3. Beginning of demolition work constitutes acceptance of existing conditions that would be apparent upon examination prior to starting demolition.
- B. Separate areas in which demolition is being conducted from areas that remain occupied.
  - 1. Provide, erect, and maintain temporary dustproof partitions.
- C. Maintain weatherproof exterior building enclosure, except for interruptions required for replacement or modifications; prevent water and humidity damage.
- D. Remove existing work as indicated and required to accomplish new work.
  - 1. Remove rotted wood, corroded metals, and deteriorated masonry and concrete; replace with new construction of like materials.
  - 2. Remove items indicated on drawings.
- E. Services including, but not limited to, HVAC and Electrical: Remove existing systems and equipment as indicated.
  - 1. Maintain existing active systems to remain in operation, and maintain access to equipment and operational components.
  - 2. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
  - 3. Verify that abandoned services serve only abandoned facilities before removal.
  - 4. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings. Remove back to source of supply where possible, otherwise cap stub and tag with

identification.

- F. Protect existing work to remain.
  - 1. Prevent movement of structure. Provide shoring and bracing as required.
  - 2. Perform cutting to accomplish removal work neatly and as specified for cutting new work.
  - 3. Repair adjacent construction and finishes damaged during removal work.
  - 4. Patch to match new work.

### **3.05 DEBRIS AND WASTE REMOVAL**

- A. Remove debris, junk, and trash from site.
- B. Leave site in clean condition, ready for subsequent work.
- C. Clean up spillage and wind-blown debris from public and private lands.

**END OF SECTION**

**SECTION 04 20 00  
UNIT MASONRY**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Concrete block.
- B. Mortar.
- C. Reinforcement and anchorage.

**1.02 REFERENCE STANDARDS**

- A. ASTM A615/A615M - Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement; 2022.
- B. ASTM A641/A641M - Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire; 2019.
- C. ASTM A951/A951M - Standard Specification for Steel Wire for Masonry Joint Reinforcement; 2022.
- D. ASTM A1064/A1064M - Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete; 2022.
- E. ASTM C90 - Standard Specification for Loadbearing Concrete Masonry Units; 2023.
- F. ASTM C140/C140M - Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units; 2023a.
- G. ASTM C144 - Standard Specification for Aggregate for Masonry Mortar; 2018.
- H. ASTM C150/C150M - Standard Specification for Portland Cement; 2022.
- I. ASTM C207 - Standard Specification for Hydrated Lime for Masonry Purposes; 2018.
- J. ASTM C212 - Standard Specification for Structural Clay Facing Tile; 2022.
- K. ASTM C216 - Standard Specification for Facing Brick (Solid Masonry Units Made from Clay or Shale); 2023.
- L. ASTM C270 - Standard Specification for Mortar for Unit Masonry; 2019a, with Editorial Revision.
- M. ASTM C979/C979M - Standard Specification for Pigments for Integrally Colored Concrete; 2016.
- N. ASTM C1072 - Standard Test Methods for Measurement of Masonry Flexural Bond Strength; 2022.
- O. ASTM C1314 - Standard Test Method for Compressive Strength of Masonry Prisms; 2023b.
- P. ASTM E514/E514M - Standard Test Method for Water Penetration and Leakage Through Masonry; 2020.
- Q. TMS 402/602 - Building Code Requirements and Specification for Masonry Structures; 2022, with Errata (2024).

R. Standard Practice for Bracing Masonry Walls Under Construction - Mason Contractors Association of America.

### **1.03 ADMINISTRATIVE REQUIREMENTS**

A. Preinstallation Meeting: Convene a preinstallation meeting one week before starting work of this section; require attendance by all relevant installers.

### **1.04 SUBMITTALS**

A. See Section 01 30 00 - Administrative Requirements for submittal procedures.

B. Product Data: Provide data for masonry units, fabricated wire reinforcement, mortar, and masonry accessories.

C. Manufacturer's Certificate: Certify that masonry units meet or exceed specified requirements.

D. Manufacturer's Certificate: Certify that water repellent admixture manufacturer has certified masonry unit manufacturer as an approved user of water repellent admixture in the manufacture of concrete block.

### **1.05 QUALITY ASSURANCE**

A. Comply with provisions of TMS 402/602, except where exceeded by requirements of Contract Documents.

B. Source Limitations For Masonry Units: Obtain masonry units of a uniform texture, color and blend (within the range acceptable for each characteristic) through one source from a single manufacturer for each product required.

C. Source Limitations For Mortar Materials: Obtain mortar components of a uniform quality from one manufacturer for each component and from one source or producer.

### **1.06 DELIVERY, STORAGE, AND HANDLING**

A. Deliver, handle, and store masonry units by means that will prevent mechanical damage and contamination by other materials.

B. Deliver packaged materials in manufacturers' original containers, with labels and markings intact and legible.

## **PART 2 PRODUCTS**

### **2.01 CONCRETE MASONRY UNITS**

A. Concrete Block: Comply with referenced standards and as follows:

1. Size: Standard units with nominal face dimensions of 16 by 8 inches and nominal depth of 8 inches.
2. All Units: ASTM C90, medium or lightweight, at contractor's discretion. Unit Compressive Strength: 2150 psi.
  - a. Hollow block.
  - b. Exposed Faces: Manufacturer's standard color and texture where indicated.
3. Units with Integral Water Repellent: Concrete block units as specified in this section with polymeric liquid admixture added to concrete masonry units at time of manufacture.

- a. Performance of Units with Integral Water Repellent:
  - 1) Water Permeance: When tested per ASTM E514/E514M and for a minimum of 72 hours.
    - a) No water visible on back of wall above flashing at the end of 24 hours.
    - b) No flow of water from flashing equal to or greater than 0.032 gallons per hour at the end of 24 hours.
    - c) No more than 25 percent of wall area above flashing visibly damp at end of test.
  - 2) Flexural Bond Strength: ASTM C1072; minimum 10 percent increase.
  - 3) Compressive Strength: ASTM C1314; maximum 5 percent decrease.
- b. Use only in combination with mortar that also has integral water repellent admixture.
- c. Use water repellent admixtures for masonry units and mortar by a single manufacturer.

## 2.02 MORTAR MATERIALS

- A. Portland Cement: ASTM C150/C150M, Type I; color as required to produce approved color sample.
  - 1. Hydrated Lime: ASTM C207, Type S.
  - 2. Mortar Aggregate: ASTM C144.
- B. Pigments for Colored Mortar: Pure, concentrated mineral pigments specifically intended for mixing into mortar and complying with ASTM C979/C979M.
- C. Water: Clean and potable.
- D. Admixtures:
  - 1. Air-entraining admixtures or cementitious materials containing air-entraining admixtures are not permitted in mortar.
  - 2. Anti-freeze compounds or other substances used to lower the freezing point of mortar or grout are not permitted.
  - 3. Admixtures containing calcium chloride are not permitted.
- E. Accelerating Admixture: Nonchloride type for use in cold weather.
- F. Moisture-Resistant Admixture: Water repellent compound designed to reduce capillarity.

## 2.03 REINFORCEMENT AND ANCHORAGE

- A. Manufacturers:
  - 1. Blok-Lok Limited: [www.blok-lok.com](http://www.blok-lok.com).
  - 2. Hohmann & Barnard, Inc: [www.h-b.com](http://www.h-b.com).
  - 3. WIRE-BOND [www.wirebond.com/#sle](http://www.wirebond.com/#sle).
- B. Reinforcing Steel: ASTM A615/A615M, Grade 60 (60,000 psi), deformed billet bars; uncoated.
- C. Single Wythe Joint Reinforcement: ASTM A951/A951M.
  - 1. Type: Truss.
  - 2. Material: ASTM A1064/A1064M steel wire, mill galvanized to ASTM A641/A641M Class 3.
  - 3. Size: 0.1483 inch side rods with 0.1483 inch cross rods; width as required to provide not less than 5/8 inch of mortar coverage on each exposure.
- D. Flexible Anchors: 2-piece anchors that permit differential movement between masonry and building frame, sized to provide not less than 5/8 inch of mortar coverage from masonry face.

1. CMU backup: 12 ga. channel slots, 8 inches long, with trapezoidal wire ties 0.1875 inch thick, hot dip galvanized to ASTM A 153/A 153M, Class B.

## **2.04 MORTAR MIXING**

- A. Mortar for Unit Masonry: ASTM C270, using the Proportion Specification.
  1. Exterior, loadbearing masonry: Type N.
  2. Exterior, non-loadbearing masonry: Type N.
- B. Admixtures: Add to mixture at manufacturer's recommended rate and in accordance with manufacturer's instructions; mix uniformly.
- C. Mixing: Use mechanical batch mixer and comply with referenced standards.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that field conditions are acceptable and are ready to receive masonry.
- B. Verify that related items provided under other sections are properly sized and located.

### **3.02 PREPARATION**

- A. Direct and coordinate placement of metal anchors supplied for installation under other sections.
- B. Temporary Bracing: Provide temporary support and bracing as required for stability, safety and proper performance of masonry during installation of masonry work. Maintain in place until connections and structural elements providing permanent bracing are fully erected and installed and have achieved full strength.
- C. Prevent mortar and soil from staining the face of masonry to be left exposed to view, whether scheduled to be painted or not. Immediately remove grout, mortar and soil that come in contact with such masonry.

### **3.03 COLD AND HOT WEATHER REQUIREMENTS**

- A. Comply with requirements of TMS 402/602 or applicable building code, whichever is more stringent.

### **3.04 COURSING**

- A. Establish lines, levels, and coursing indicated. Protect from displacement.
- B. Maintain masonry courses to uniform dimension. Form vertical and horizontal joints of uniform thickness.
- C. Concrete Masonry Units:
  1. Bond: Running.
  2. Coursing: One unit and one mortar joint to equal 8 inches.
  3. Mortar Joints: Concave; provide other joint types where indicated on the Drawings or in this Section.



### 3.05 PLACING AND BONDING

- A. Combine concrete masonry units and mortar to achieve a net masonry prism strength (f'm) of 1500 psi.
- B. Lay hollow masonry units with face shell bedding on head and bed joints.
- C. Buttering corners of joints or excessive furrowing of mortar joints is not permitted.
- D. Remove excess mortar, mortar droppings and mortar smears as work progresses.
- E. Remove excess mortar with water repellent admixture promptly. Do not use acids, sandblasting or high pressure cleaning methods.
- F. Do not shift or tap masonry units after mortar has achieved initial set. Where adjustment must be made, remove mortar and replace.
- G. Perform job site cutting of masonry units with proper tools to provide straight, clean, unchipped edges. Prevent broken masonry unit corners or edges.
- H. Cut mortar joints flush where EIFS vapor barrier is to be applied.
- I. Isolate masonry partitions from vertical structural framing members with a control joint.
- J. Isolate top joint of masonry partitions from horizontal structural framing members and slabs or decks with compressible joint filler.
- K. Build cavity and multi-wythe walls to full thickness shown (adjust cavity space).
- L. Build and verify dimensions for chases and pockets for built-in items according to trade contractor and equipment requirements. Notify Architect of any discrepancies between requirements and drawings.

### 3.06 REINFORCEMENT AND ANCHORAGE - GENERAL AND SINGLE WYTHE MASONRY

- A. Unless otherwise indicated on drawings or specified under specific wall type, install horizontal joint reinforcement 16 inches on center.
- B. Place continuous joint reinforcement in first and second joint below top of infills.
- C. Fasten anchors to structural framing and embed in masonry joints as masonry is laid. Unless otherwise indicated on drawings or closer spacing is indicated under specific wall type, space anchors at maximum of 24 inches horizontally and 16 inches vertically.
- D. Embed ties and anchors in mortar joint and extend into masonry unit a minimum of 1-1/2 inches with at least 5/8 inch mortar cover to the outside face of the anchor.

### 3.07 TOLERANCES

- A. Maximum Variation from Alignment of Columns: 1/4 inch.
- B. Maximum Variation From Unit to Adjacent Unit: 1/32 inch.
- C. Maximum Variation from Plane of Wall: 1/4 inch in 10 ft and 1/2 inch in 20 ft or more.
- D. Maximum Variation from Plumb: 1/4 inch per story non-cumulative; 1/2 inch in two stories or more.

- E. Maximum Variation from Level Coursing: 1/8 inch in 3 ft and 1/4 inch in 10 ft; 1/2 inch in 30 ft.
- F. Maximum Variation of Mortar Joint Thickness: Head joint, minus 1/4 inch, plus 3/8 inch.
- G. Maximum Variation from Cross Sectional Thickness of Walls: 1/4 inch.

### **3.08 CUTTING AND FITTING**

- A. Cut and fit for pipes, ducts, sleeves, ducts, and ducts. Coordinate with other sections of work to provide correct size, shape, and location.
- B. Obtain Architect/Engineer approval prior to cutting or fitting masonry work not indicated or where appearance or strength of masonry work may be impaired.

### **3.09 CLEANING**

- A. Remove excess mortar, mortar smears and mortar droppings.
- B. Replace defective mortar. Match adjacent work.
- C. Clean soiled surfaces with cleaning solution.
- D. Use non-metallic tools in cleaning operations.

### **3.10 PROTECTION**

- A. Provide temporary support and bracing as required for stability, safety and proper performance of erected masonry work until connections and structural elements providing permanent bracing are fully erected and installed and have achieved full strength.
- B. Prevent soil and materials from other trades from staining the face of masonry to be left exposed to view, whether scheduled to be painted or not. Immediately remove soil and other foreign materials that come in contact with such masonry.

**END OF SECTION**

**SECTION 07 24 00**  
**EXTERIOR INSULATION AND FINISH SYSTEMS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Composite wall and soffit cladding of rigid insulation and reinforced finish coating, Class PB.
- B. Drainage and water-resistive barriers behind insulation board.

**1.02 RELATED REQUIREMENTS**

- A. Section 07 62 00 - Sheet Metal Flashing and Trim: Perimeter flashings.
- B. Section 07 92 00 - Joint Sealants: Sealing joints between EIFS and adjacent construction and penetrations through EIFS.

**1.03 REFERENCE STANDARDS**

- A. ASTM B117 - Standard Practice for Operating Salt Spray (Fog) Apparatus; 2019.
- B. ASTM C297/C297M - Standard Test Method for Flatwise Tensile Strength of Sandwich Constructions; 2016.
- C. ASTM C578 - Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation; 2023.
- D. ASTM C1397 - Standard Practice for Application of Class PB Exterior Insulation and Finish Systems (EIFS) and EIFS with Drainage; 2013 (Reapproved 2019).
- E. ASTM D968 - Standard Test Methods for Abrasion Resistance of Organic Coatings by Falling Abrasive; 2022.
- F. ASTM D2247 - Standard Practice for Testing Water Resistance of Coatings in 100 % Relative Humidity; 2015 (Reapproved 2020).
- G. ASTM D3273 - Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber; 2021.
- H. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2023d.
- I. ASTM E331 - Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference; 2000 (Reapproved 2023).
- J. ASTM E2273 - Standard Test Method for Determining the Drainage Efficiency of Exterior Insulation and Finish Systems (EIFS) Clad Wall Assemblies; 2018.
- K. ASTM E2486/E2486M - Standard Test Method for Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS); 2022.
- L. ASTM G153 - Standard Practice for Operating Enclosed Carbon Arc Light Apparatus for Exposure of Nonmetallic Materials; 2013 (Reapproved 2021).
- M. ASTM G155 - Standard Practice for Operating Xenon Arc Lamp Apparatus for Exposure of Materials; 2021.

- N. ICC-ES AC219 - Acceptance Criteria for Exterior Insulation and Finish Systems; 2009.
- O. ICC-ES AC235 - Acceptance Criteria for EIFS Clad Drainage Wall Assemblies; 2015, with Editorial Revision (2022).
- P. NFPA 259 - Standard Test Method for Potential Heat of Building Materials; 2023, with Errata.
- Q. NFPA 268 - Standard Test Method for Determining Ignitability of Exterior Wall Assemblies Using a Radiant Heat Energy Source; 2022.
- R. NFPA 285 - Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Wall Assemblies Containing Combustible Components; 2025.

#### **1.04 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide data on system materials, product characteristics, performance criteria, and system limitations.
- C. Shop Drawings: Indicate wall and soffit joint patterns, joint details, and molding profiles.
- D. Selection Samples: Submit manufacturer's standard range of samples illustrating available coating colors and textures.
- E. Verification Samples: Submit actual samples of selected coating on specified substrate, minimum 12 inches square, illustrating project colors and textures.
- F. Manufacturer's Installation Instructions: Indicate preparation required, installation techniques, and jointing requirements.

#### **1.05 QUALITY ASSURANCE**

- A. Maintain copy of specified installation standard and manufacturer's installation instructions at project site during installation.
- B. Installer Qualifications: Company specializing in the type of work specified and with at least ten years of experience.

#### **1.06 MOCK-UPS**

- A. Construct mock-up of typical EIFS application on specified substrate, size as indicated on drawings, and including flashings, joints, and edge conditions.
- B. Locate mock-up as indicated on drawings.
- C. Mock-up may remain as part of the Work.

#### **1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Delivery: Deliver materials to project site in manufacturer's original, unopened containers with labels intact. Inspect materials and notify manufacturer of any discrepancies.
- B. Storage: Store materials as directed by manufacturer's written instructions.
  1. Protect adhesives and finish materials from freezing, temperatures below 40 degrees F and temperatures in excess of 90 degrees F.

2. Protect Portland cement based materials from moisture and humidity. Store under cover off the ground in a dry location.
3. Protect insulation materials from exposure to sunlight.

### 1.08 FIELD CONDITIONS

- A. Do not prepare materials or apply EIFS under conditions other than those described in the manufacturer's written instructions.
- B. Do not prepare materials or apply EIFS during inclement weather unless areas of installation are protected. Protect installed EIFS areas from inclement weather until dry.
- C. Do not install coatings or sealants when ambient temperature is below 40 degrees F.
- D. Do not leave installed insulation board exposed to sunlight for extended periods of time.

### 1.09 WARRANTY

- A. See Section 01 78 00 - Closeout Submittals for additional warranty requirements.
- B. Provide manufacturer's standard material warranty, covering a period of not less than 5 years.
- C. Provide separate warranty from installer covering labor for repairs or replacement for a period of not less than 5 years.

## PART 2 PRODUCTS

### 2.01 MANUFACTURERS

- A. Exterior Insulation and Finish Systems Manufacturers:
  1. Dryvit Systems, Inc; Dryvit Outsulation EIFS, Class PB: [www.dryvit.com](http://www.dryvit.com).
  2. Master Wall, Inc; Rollershield Drainage CIFS - Continuously Insulated Finish System with Drainage and Air/Water Barrier: [www.masterwall.com](http://www.masterwall.com).
  3. Sika Corporation; Senergy Channeled Adhesive CI (Continuous Insulation) Design Wall System: [www.senergy-mbcc.sika.com/en](http://www.senergy-mbcc.sika.com/en).
  4. Sto Corp; StoTherm ci: [www.stocorp.com](http://www.stocorp.com).
  5. Substitutions: See Section 01 60 00 - Product Requirements.

### 2.02 EXTERIOR INSULATION AND FINISH SYSTEM

- A. Exterior Insulation and Finish System: DRAINAGE type; reinforced finish coating on flat-backed insulation board adhesive-applied directly to water-resistive coating over substrate; provide a complete system that has been tested to show compliance with the following characteristics; include all components of specified system and substrate(s) in tested samples.
- B. Fire Characteristics:
  1. Flammability: Pass, when tested in accordance with NFPA 285.
  2. Ignitibility: No sustained flaming when tested in accordance with NFPA 268.
  3. Potential Heat of Foam Plastic Insulation Tested Independently of Assembly: No portion of the assembly having potential heat that exceeds that of the insulation sample tested for flammability (above), when tested in accordance with NFPA 259 with results expressed in Btu per square foot.

- C. Adhesion of Water-Resistive Coating to Substrate: For each combination of coating and substrate, minimum flatwise tensile bond strength of 15 psi, when tested in accordance with ASTM C297/C297M.
- D. Adhesion to Water-Resistive Coating: For each combination of insulation board and substrate, when tested in accordance with ASTM C297/C297M, maximum adhesive failure of 25 percent unless flatwise tensile bond strength exceeds 15 psi in all samples.
- E. Water Penetration Resistance: No water penetration beyond the plane of the base coat/insulation board interface after 15 minutes, when tested in accordance with ASTM E331 at 6.24 psf differential pressure with tracer dye in the water spray; include in tested sample at least two vertical joints and one horizontal joint of same type to be used in construction; disassemble sample if necessary to determine extent of water penetration.
- F. Drainage Efficiency: Average minimum efficiency of 90 percent, when tested in accordance with ASTM E2273 for 75 minutes.
- G. Salt Spray Resistance: No cracking, checking, crazing, erosion, blistering, peeling, delamination, or corrosion of finish coating after 300 hours exposure in accordance with ASTM B117, using at least three samples matching intended assembly, at least 4 by 6 inches in size.
- H. Freeze-Thaw Resistance: No cracking, checking, crazing, erosion, blistering, peeling, delamination, or corrosion of finish coating when viewed under 5x magnification after 10 cycles, when tested in accordance with ICC-ES AC219 or ICC-ES AC235.
- I. Weathering Resistance: No cracking, checking, crazing, erosion, blistering, peeling, delamination, or corrosion of finish coating when viewed under 5x magnification after 2000 hours of accelerated weathering conducted in accordance with ASTM G153 Cycle 1 or ASTM G155 Cycles 1, 5, or 9.
- J. Water Degradation Resistance: No cracking, checking, crazing, erosion, blistering, peeling, delamination, or corrosion of finish coating after 14 days exposure, when tested in accordance with ASTM D2247.
- K. Mildew Resistance: No growth supported on finish coating during 28 day exposure period, when tested in accordance with ASTM D3273.
- L. Abrasion Resistance Of Finish: No cracking, checking or loss of film integrity when tested in accordance with ASTM D968 with 113.5 gallons of sand.
- M. Impact Resistance: Construct system to provide the following impact resistance without exposure of broken reinforcing mesh, when tested in accordance with ASTM E2486/E2486M:
  - 1. Standard: 25 to 49 in-lb, for areas not indicated as requiring higher impact resistance.

## 2.03 MATERIALS

- A. Finish Coating Top Coat: Water-based, air curing, acrylic or polymer-based finish with integral color and texture.
  - 1. Color and Texture: Match existing.
- B. Base Coat: Fiber-reinforced, acrylic or polymer-based product compatible with insulation board and reinforcing mesh, Class PB.

- C. Reinforcing Mesh: Balanced, open weave glass fiber fabric, treated for compatibility and improved bond with coating, weight, strength, and number of layers as required to meet required system impact rating.
- D. Expanded Polystyrene (EPS) Board Insulation: Complies with ASTM C578.
  - 1. Board Size: 24 by 48 inches.
  - 2. Board Size Tolerance: Plus/minus 1/16 inch from square and dimension.
  - 3. Board Thickness: As indicated on the Drawings.
  - 4. Board Edges: Square.
  - 5. Surface Burning Characteristics: Flame spread/Smoke developed index of 25/450, when tested in accordance with ASTM E84.
- E. Water-Resistive Barrier Coating: Fluid-applied air and water barrier membrane; applied to sheathing; furnished or approved by EIFS manufacturer.

## **2.04 ACCESSORIES**

- A. Insulation Adhesive: Type required by EIFS manufacturer for project substrate.
- B. Metal Flashings: See Section 07 62 00.
- C. Trim: EIFS manufacturer's standard PVC or galvanized steel trim accessories, as required for a complete project and including drainage accessories.
- D. Sealant Materials: Compatible with EIFS materials and as recommended by EIFS manufacturer.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that substrate is sound and free of oil, dirt, other surface contaminants, efflorescence, loose materials, or protrusions that could interfere with EIFS installation and is of a type and construction that is acceptable to EIFS manufacturer. Do not begin work until substrate and adjacent materials are complete and thoroughly dry.
- B. Verify that substrate surface is flat, with no deviation greater than 1/4 in when tested with a 10 ft straightedge.

### **3.02 PREPARATION**

- A. Apply primer to substrate as recommended by EIFS manufacturer for project conditions.

### **3.03 INSTALLATION - GENERAL**

- A. Install in accordance with EIFS manufacturer's instructions and ASTM C1397.
  - 1. Where different requirements appear in either document, comply with the most stringent.
  - 2. Neither of these documents supercedes provisions of Contract Documents that defines contractual relationships between parties or scope of this work.

### **3.04 INSTALLATION - WATER-RESISTIVE BARRIER**

- A. Apply barrier coating as recommended by coating manufacturer; prime substrate as required before application.

- B. Seal substrate transitions and intersections with other materials to form continuous water-resistive barrier on exterior of sheathing, using method recommended by manufacturer.
- C. At door and window rough openings and other wall penetrations, seal water-resistive barrier and flexible flashings to rough opening before installation of metal flashings, sills, or frames, using method recommended by manufacturer.
- D. At moving expansion joints, apply flexible flashing or flashing tape across and recessed into joint with U-loop forming continuous barrier but allowing movement.
- E. Lap flexible flashing or flashing tape at least 2 inches on each side of joint or transition.

### **3.05 INSTALLATION - INSULATION**

- A. Install in accordance with manufacturer's instructions.
- B. Prior to installation of boards, install starter track and other trim level and plumb and securely fastened. Install only in full lengths, to minimize moisture intrusion; cut horizontal trim tight to vertical trim.
- C. Install back wrap reinforcing mesh at all openings and terminations that are not to be protected with trim.
- D. On wall surfaces, install boards horizontally.
- E. Place boards in a method to maximize tight joints. Stagger vertical joints and interlock at corners. Butt edges and ends tight to adjacent board and to protrusions. Achieve a continuous flush insulation surface, with no gaps in excess of 1/16 inch.
- F. Fill gaps greater than 1/16 inch with strips or shims cut from the same insulation material.
- G. Rasp irregularities off surface of installed insulation board.
- H. Adhesive Attachment: Use method required by manufacturer to achieve drainage efficiency specified; do not close up drainage channels when placing insulation board.

### **3.06 INSTALLATION - CLASS PB FINISH**

- A. Base Coat: Apply in thickness as necessary to fully embed reinforcing mesh, wrinkle free, including back-wrap at terminations of EIFS. Install reinforcing fabric as recommended by EIFS manufacturer.
  - 1. Lap reinforcing mesh edges and ends a minimum of 2-1/2 inches.
  - 2. Allow base coat to dry a minimum of 24 hours before next coating application.
- B. At locations indicated, install second layer of reinforcing mesh embedded in second coat of base coating, tightly butting ends and edges of mesh.
- C. Apply finish coat after base coat has dried not less than 24 hours, embed finish aggregate, and finish to a uniform texture and color.
- D. Finish Coat Thickness: As recommended by manufacturer.
- E. Seal control and expansion joints within the field of exterior finish and insulation system, using procedures recommended by sealant and finish system manufacturers.



### **3.07 CLEANING**

- A. See Section 01 70 00 - Execution and Closeout Requirements for additional requirements.
- B. Clean EIFS surfaces and work areas of foreign materials resulting from EIFS operations.

### **3.08 PROTECTION**

- A. Protect completed work from damage and soiling by subsequent work.

**END OF SECTION**

**SECTION 07 62 00**  
**SHEET METAL FLASHING AND TRIM**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Fabricated sheet metal items, including flashings and counterflashings.
- B. Sealants for joints within sheet metal fabrications.

**1.02 REFERENCE STANDARDS**

- A. AAMA 2603 - Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels (with Coil Coating Appendix); 2022.
- B. ASTM A653/A653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process; 2023.
- C. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2018.
- D. CDA A4050 - Copper in Architecture - Handbook; current edition.
- E. SMACNA (ASMM) - Architectural Sheet Metal Manual; 2012.

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations, and installation details.
- C. Samples: Submit two samples 2 by 4 inch in size illustrating metal finish color.
- D. Manufacturer's standard limited warranty on painted finishes.

**1.04 QUALITY ASSURANCE**

- A. Perform work in accordance with SMACNA (ASMM) and CDA A4050 requirements and standard details, except as otherwise indicated.
- B. Fabricator and Installer Qualifications: Company specializing in sheet metal work with five years of experience.

**1.05 DELIVERY, STORAGE, AND HANDLING**

- A. Stack material to prevent twisting, bending, and abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
- B. Prevent contact with materials that could cause discoloration or staining.

**1.06 WARRANTY**

- A. See Section 01 78 00 - Closeout Submittals, for additional warranty requirements.
- B. Correct defective Work within a two year period after Date of Substantial Completion.

- C. Provide manufacturer's standard five (5) year limited finish warranty against cracking, crazing, chipping, peeling, excessive chalking and excessive fading/color change.

## **PART 2 PRODUCTS**

### **2.01 SHEET MATERIALS**

- A. Pre-Finished Galvanized Steel: ASTM A653/A653M, with G90/Z275 zinc coating; minimum 24-gauge, 0.0239-inch thick base metal, shop pre-coated with modified silicone coating.
  - 1. Silicone Modified Polyester Coating: Pigmented organic powder coating, AAMA 2603; baked enamel finish system.
  - 2. Color: As selected by Architect/Engineer from manufacturer's standard colors.

### **2.02 FABRICATION**

- A. Form sections true to shape, accurate in size, square, and free from distortion or defects.
- B. Form pieces in longest possible lengths.
- C. Hem exposed edges on underside 1/2 inch; miter and seam corners.
- D. Form material with flat lock seams, except where otherwise indicated; at moving joints, use sealed lapped, bayonet-type or interlocking hooked seams.
- E. Fabricate corners from one piece with minimum 18-inch long legs; seam for rigidity, seal with sealant.
- F. Fabricate vertical faces with bottom edge formed outward 1/4 inch and hemmed to form drip.

### **2.03 ACCESSORIES**

- A. Fasteners: Stainless steel, with soft neoprene washers.
- B. Concealed Sealants: Non-curing butyl sealant.
- C. Exposed Sealants: ASTM C920; elastomeric sealant, with minimum movement capability as recommended by manufacturer for substrates to be sealed; color to match adjacent material.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify roof curbs, are solidly set, and nailing strips located.
- B. Verify roofing termination and base flashings are in place, sealed, and secure.

### **3.02 INSTALLATION**

- A. Secure flashings in place using concealed fasteners, and use exposed fasteners only where permitted.
- B. Fit flashings tight in place; make corners square, surfaces true and straight in planes, and lines accurate to profiles.

C. Seal metal joints watertight.

**END OF SECTION**

## SECTION 07 92 00 JOINT SEALANTS

### PART 1 GENERAL

#### 1.01 SECTION INCLUDES

- A. Nonsag gunnable joint sealants.
- B. Joint backings and accessories.

#### 1.02 REFERENCE STANDARDS

- A. ASTM C794 - Standard Test Method for Adhesion-in-Peel of Elastomeric Joint Sealants; 2018 (Reapproved 2022).
- B. ASTM C920 - Standard Specification for Elastomeric Joint Sealants; 2018.
- C. ASTM C1087 - Standard Test Method for Determining Compatibility of Liquid-Applied Sealants with Accessories Used in Structural Glazing Systems; 2023.
- D. ASTM C1193 - Standard Guide for Use of Joint Sealants; 2016 (Reapproved 2023).
- E. ASTM C1248 - Standard Test Method for Staining of Porous Substrate by Joint Sealants; 2022.
- F. ASTM C1330 - Standard Specification for Cylindrical Sealant Backing for Use with Cold Liquid-Applied Sealants; 2023.
- G. SCAQMD 1168 - Adhesive and Sealant Applications; 1989, with Amendment (2022).
- H. SWRI (VAL) - SWR Institute Validated Products Directory; Current Edition.

#### 1.03 SUBMITTALS

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Submit manufacturer's technical datasheets for each product to be used; include the following:
  - 1. Physical characteristics, including movement capability, VOC content, hardness, cure time, and color availability.
  - 2. List of backing materials approved for use with the specific product.
  - 3. Backing material recommended by sealant manufacturer.
  - 4. Substrates that product is known to satisfactorily adhere to and with which it is compatible.
  - 5. Substrates the product should not be used on.
  - 6. Substrates for which use of primer is required.
  - 7. Substrates for which laboratory adhesion and/or compatibility testing is required.
  - 8. Installation instructions, including precautions, limitations, and recommended backing materials and tools.
  - 9. Sample product warranty.
  - 10. Certification by manufacturer indicating that product complies with specification requirements.
  - 11. SWRI Validation: Provide currently available sealant product validations as listed by SWRI (VAL) for specified sealants.
- C. Product Data for Accessory Products: Submit manufacturer's technical data sheet for each product to be used, including physical characteristics, installation instructions, and recommended tools.

- D. Color Cards for Selection: Where sealant color is not specified, submit manufacturer's color cards showing standard colors available for selection.
- E. Samples for Verification: Where custom sealant color is specified, obtain directions from Architect/Engineer and submit at least two physical samples for verification of color of each required sealant.
- F. Preconstruction Laboratory Test Reports: Submit at least four weeks prior to start of installation.
- G. Installer's qualification statement.
- H. Executed warranty.

#### **1.04 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum ten years experience.
- B. Installer Qualifications: Company specializing in performing the work of this section and with at least five years of documented experience.
- C. Preconstruction Laboratory Testing: Arrange for sealant manufacturer(s) to test each combination of sealant, substrate, backing, and accessories.
  1. Adhesion Testing: In accordance with ASTM C794.
  2. Compatibility Testing: In accordance with ASTM C1087.
  3. Allow sufficient time for testing to avoid delaying the work.
  4. Deliver sufficient samples to manufacturer for testing.
  5. Report manufacturer's recommended corrective measures, if any, including primers or techniques not indicated in product data submittals.

#### **1.05 WARRANTY**

- A. See Section 01 78 00 - Closeout Submittals for additional warranty requirements.
- B. Manufacturer Warranty: Provide 2-year manufacturer warranty for installed sealants and accessories that fail to achieve a watertight seal, exhibit loss of adhesion or cohesion, or do not cure. Complete forms in Owner's name and register with manufacturer.
- C. Extended Correction Period: Correct defective work within 2-year period commencing on Date of Substantial Completion.

### **PART 2 PRODUCTS**

#### **2.01 MANUFACTURERS**

- A. Nonsag Sealants:
  1. Dow Corning Corporation: [www.dowcorning.com/construction](http://www.dowcorning.com/construction).
  2. Hilti, Inc: [www.us.hilti.com](http://www.us.hilti.com).
  3. Master Builders Solutions by BASF: [www.master-builders-solutions.basf.us/en-us](http://www.master-builders-solutions.basf.us/en-us).
  4. Momentive Performance Materials, Inc (formerly GE Silicones): [www.momentive.com](http://www.momentive.com).
  5. Pecora Corporation: [www.pecora.com](http://www.pecora.com).
  6. Sika Corporation: [www.usa-sika.com](http://www.usa-sika.com).
  7. Tremco Commercial Sealants & Waterproofing: [www.tremcosealants.com](http://www.tremcosealants.com).

8. W.R. Meadows, Inc: [www.wrmeadows.com](http://www.wrmeadows.com).

## 2.02 JOINT SEALANT APPLICATIONS

### A. Scope:

1. Exterior Joints:
  - a. Seal open joints except open joints indicated on drawings as not sealed.
2. Interior Joints:
  - a. Seal open joints except specific open joints indicated on drawings as not sealed.
3. Do Not Seal:
  - a. Intentional weep holes in masonry.
  - b. Weep holes in curtain wall, storefront and window systems.
  - c. Joints indicated to be covered with expansion joint cover assemblies.
  - d. Joints where sealant is specified to be furnished and installed by manufacturer of product to be sealed.
  - e. Joints where sealant installation is specified in other sections.
  - f. Joints between suspended ceilings and walls.

B. Exterior Joints: Use non-sag non-staining silicone sealant, unless otherwise indicated.

1. Lap Joints in Sheet Metal Fabrications: Butyl rubber, non-curing.

C. Interior Joints: Use non-sag polyurethane sealant, unless otherwise indicated.

## 2.03 JOINT SEALANTS - GENERAL

A. Sealants and Primers: Provide products having lower volatile organic compound (VOC) content than indicated in SCAQMD 1168.

## 2.04 NONSAG JOINT SEALANTS

A. Non-Staining Silicone Sealant: ASTM C920, Grade NS, Uses M and A; not expected to withstand continuous water immersion or traffic.

1. Nonstaining to Porous Stone: Nonstaining to light-colored natural stone when tested in accordance with ASTM C1248.
2. Color: To be selected by Architect/Engineer from manufacturer's standard range.
3. Cure Type: Single-component, neutral moisture curing.
4. Products:
  - a. Dow Chemical Company; DOWSIL 790 Silicone Building Sealant: [consumer.dow.com/en-us/industry/ind-building-construction.html](http://consumer.dow.com/en-us/industry/ind-building-construction.html).
  - b. Sika Corporation; Sikasil WS-290: [www.usa-sika.com](http://www.usa-sika.com).
  - c. Tremco Commercial Sealants & Waterproofing; Spectrem 1: [www.tremcosealants.com](http://www.tremcosealants.com).
  - d. Tremco Commercial Sealants & Waterproofing; Tremsil 200: [www.tremcosealants.com](http://www.tremcosealants.com).
  - e. Substitutions: See Section 01 60 00 - Product Requirements.

B. Polyurethane Sealant: ASTM C920, Grade NS, Uses M and A; single or multi-component; not expected to withstand continuous water immersion or traffic.

1. Hardness Range: 35 to 45, Shore A, when tested in accordance with ASTM C661.
2. Products:
  - a. Sika Corporation; Sikaflex-15 LM: [www.usa-sika.com](http://www.usa-sika.com).
  - b. Sika Corporation; Sikaflex-2c NS: [www.usa-sika.com](http://www.usa-sika.com).

- c. Tremco Commercial Sealants & Waterproofing; Dymonic 100: [www.tremcosealants.com](http://www.tremcosealants.com).
  - d. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Noncuring Butyl Sealant: Solvent-based, single component, nonsag, nonskinning, nonhardening, nonbleeding; nonvapor permeable; intended for fully concealed applications.
- 1. Products:
    - a. Pecora Corporation; Pecora BA-98 Non-Skinning Butyl Sealant: [www.pecora.com](http://www.pecora.com).
    - b. Substitutions: See Section 01 60 00 - Product Requirements.

## 2.05 ACCESSORIES

- A. Sealant Backing Rod, Closed-Cell Type:
  - 1. Cylindrical flexible sealant backings complying with ASTM C1330 Type C.
  - 2. Size: 25 to 50 percent larger in diameter than joint width.
- B. Sealant Backing Rod, Bi-Cellular Type:
  - 1. Cylindrical flexible sealant backings complying with ASTM C1330 Type B.
  - 2. Size: 25 to 50 percent larger in diameter than joint width.
- C. Backing Tape: Self-adhesive polyethylene tape with surface that sealant will not adhere to and recommended by tape and sealant manufacturers for specific application.
- D. Masking Tape: Self-adhesive, nonabsorbent, nonstaining, removable without adhesive residue, and compatible with surfaces adjacent to joints and sealants.
- E. Joint Cleaner: Noncorrosive and nonstaining type, type recommended by sealant manufacturer; compatible with joint forming materials.
- F. Primers: Type recommended by sealant manufacturer to suit application; nonstaining.

## PART 3 EXECUTION

### 3.01 EXAMINATION

- A. Verify that joints are ready to receive work.
- B. Verify that backing materials are compatible with sealants.

### 3.02 PREPARATION

- A. Remove loose materials and foreign matter that could impair adhesion of sealant.
- B. Clean joints, and prime as necessary, in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions and ASTM C1193.
- D. Mask elements and surfaces adjacent to joints from damage and disfigurement due to sealant work; be aware that sealant drips and smears may not be completely removable.
- E. Concrete Floor Joints That Will Be Exposed in Completed Work: Test joint filler in an inconspicuous area to verify that it does not stain or discolor slab.

### 3.03 INSTALLATION

- A. Install this work in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.



- B. Provide joint sealant installations complying with ASTM C1193.
- C. Measure joint dimensions and size joint backers to achieve width-to-depth ratio, neck dimension, and surface bond area as recommended by manufacturer, except where specific dimensions are indicated.
- D. Install bond breaker backing tape where backer rod cannot be used.
- E. Install sealant free of air pockets, foreign embedded matter, ridges, and sags, and without getting sealant on adjacent surfaces.
- F. Do not install sealant when ambient temperature is outside manufacturer's recommended temperature range, or will be outside that range during the entire curing period, unless manufacturer's approval is obtained and instructions are followed.
- G. Nonsag Sealants: Tool surface concave, unless otherwise indicated; remove masking tape immediately after tooling sealant surface.

### **3.04 POST-OCCUPANCY**

- A. Post-Occupancy Inspection: Perform visual inspection of entire length of project sealant joints at a time that joints have opened to their greatest width, i.e., at low temperature in thermal cycle. Report failures immediately and repair them.

**END OF SECTION**

**SECTION 09 90 00  
PAINTING AND COATING**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Surface preparation.
- B. Interior painting and coating systems.
- C. Scope:
  - 1. Finish surfaces exposed to view, unless fully factory-finished and unless otherwise indicated, including the following:
    - a. Interior:
      - 1) Drywall: Walls, gypsum board, and similar items.

**1.02 REFERENCE STANDARDS**

- A. 40 CFR 59, Subpart D - National Volatile Organic Compound Emission Standards for Architectural Coatings; U.S. Environmental Protection Agency; Current Edition.
- B. SCAQMD 1113 - Architectural Coatings; 1977, with Amendment (2016).

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Product Data: Provide complete list of products to be used, with the following information for each:
  - 1. Product characteristics.
  - 2. Surface preparation instructions and recommendations.
  - 3. Primer requirements and finish specification.
  - 4. Storage and handling requirements and recommendations.
  - 5. Application methods.
  - 6. Clean-up information.
- C. Certification: By manufacturer that paints and finishes comply with VOC limits specified.

**1.04 QUALITY ASSURANCE**

- A. Applicator Qualifications: Company specializing in performing the type of work specified with minimum 3 years experience and approved by manufacturer.

**1.05 DELIVERY, STORAGE, AND HANDLING**

- A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- B. Container Label: Include manufacturer's name, type of paint, product name, product code, color designation, VOC content, batch date, environmental handling, surface preparation, application, and use instructions.
- C. Paint Materials: Store at a minimum of 45 degrees F and a maximum of 90 degrees F, in ventilated area, and as required by manufacturer's instructions.
- D. Handling: Maintain a clean, dry storage area to prevent contamination or damage to materials.

## 1.06 FIELD CONDITIONS

- A. Do not apply materials when environmental conditions are outside the ranges required by manufacturer.
- B. Follow manufacturer's recommended procedures for producing the best results, including testing substrates, moisture in substrates, and humidity and temperature limitations.

## PART 2 PRODUCTS

### 2.01 MANUFACTURERS

- A. Basis of Design Products: Subject to compliance with requirements, provide Sherwin-Williams Company (The) products indicated; [www.sherwin-williams.com](http://www.sherwin-williams.com).

### 2.02 PAINTINGS AND COATINGS

- A. General:
  - 1. Provide factory-mixed coatings unless otherwise indicated.
  - 2. Do not reduce, thin, or dilute coatings or add materials to coatings unless specifically indicated in manufacturer's instructions.
- B. Volatile Organic Compound (VOC) Content:
  - 1. Provide paints and finishes that comply with the most stringent requirements specified in the following:
    - a. 40 CFR 59, Subpart D--National Volatile Organic Compound Emission Standards for Architectural Coatings.
    - b. SCAQMD 1113 Rule.
    - c. Architectural coatings VOC limits of State in which the project is located.
  - 2. Determination of VOC Content: Testing and calculation in accordance with 40 CFR 59, Subpart D (EPA Method 24), exclusive of colorants added to a tint base and water added at project site, or other method acceptable to authorities having jurisdiction.
- C. Accessory Materials: Provide primers, sealers, cleaning agents, cleaning cloths, sanding materials, and clean-up materials as required for final completion of painted surfaces.

### 2.03 PAINT SYSTEMS - INTERIOR

- A. Drywall: Walls, gypsum board, and similar items.
  - 1. Latex Systems:
    - a. Eg-Shel Finish High Performance (HP):
      - 1) 1st Coat: Sherwin-Williams ProMar 200 Zero VOC Interior Latex Primer, B28W2600: [www.sherwin-williams.com](http://www.sherwin-williams.com).
        - a) 4 mils wet, 1.5 mils dry per coat.
      - 2) 2nd and 3rd Coat: Sherwin-Williams ProMar 200 HP Zero VOC Eg-Shel, B20-1950 Series: [www.sherwin-williams.com](http://www.sherwin-williams.com).
        - a) 4 mils wet, 1.7 mils dry per coat.

## PART 3 EXECUTION

### 3.01 EXAMINATION

- A. Verify that surfaces are ready to receive work as instructed by the product manufacturer.

- B. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially affect proper application.

### **3.02 PREPARATION**

- A. Clean surfaces thoroughly and correct defects prior to application.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Gypsum Board: Fill minor defects with filler compound; sand smooth and remove dust prior to painting.

### **3.03 APPLICATION**

- A. Apply products in accordance with manufacturer's written instructions.
- B. Apply coatings at spread rate required to achieve manufacturer's recommended dry film thickness.
- C. Regardless of number of coats specified, apply additional coats until complete hide is achieved.

### **3.04 PRIMING**

- A. Apply primer to all surfaces unless specifically not required by coating manufacturer. Apply in accordance with coating manufacturer's instructions.
- B. Primers specified in painting schedules may be omitted on items factory primed or factory finished items if acceptable to top coat manufacturers.

### **3.05 CLEANING**

- A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.
- B. Clean surfaces immediately of overspray, splatter, and excess material.
- C. After coating has cured, clean and replace finish hardware, fixtures, and fittings previously removed.

### **3.06 PROTECTION**

- A. Protect finished coatings from damage until completion of project.
- B. Touch-up damaged finishes after Substantial Completion.

**END OF SECTION**

**SECTION 23 05 19**  
**METERS AND GAUGES FOR HVAC PIPING**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Pressure gages and pressure gage taps.
- B. Thermometers and thermometer wells.

**1.02 RELATED REQUIREMENTS**

- A. Section 23 21 13 - Hydronic Piping.

**1.03 REFERENCE STANDARDS**

- A. ASME B40.100 - Pressure Gauges and Gauge Attachments; 2013.
- B. ASTM E1 - Standard Specification for ASTM Liquid-in-Glass Thermometers; 2014.
- C. ASTM E77 - Standard Test Method for Inspection and Verification of Thermometers; 2014 (Reapproved 2021).

**1.04 SUBMITTALS**

- A. Product Data: Provide list that indicates use, operating range, total range and location for manufactured components.
- B. Project Record Documents: Record actual locations of components and instrumentation.

**1.05 FIELD CONDITIONS**

- A. Do not install instrumentation when areas are under construction, except for required rough-in, taps, supports and test plugs.

**PART 2 PRODUCTS**

**2.01 PRESSURE GAGES**

- A. Pressure Gages: ASME B40.100, UL 393 drawn steel case, phosphor bronze bourdon tube, rotary brass movement, brass socket, with front recalibration adjustment, black scale on white background.
  - 1. Case: Steel with brass bourdon tube.
  - 2. Size: 4-1/2 inch diameter.
  - 3. Mid-Scale Accuracy: One percent.
  - 4. Scale: Psi.

**2.02 PRESSURE GAGE TAPPINGS**

- A. Gage Cock: Tee or lever handle, brass for maximum 150 psi.

**2.03 STEM TYPE THERMOMETERS**

- A. Manufacturers:
  - 1. Dwyer Instruments, Inc.
  - 2. Omega Engineering, Inc.

3. Weksler Glass Thermometer Corp.
  4. Miljoco Corporation.
- B. Thermometers - Adjustable Angle: Red- or blue-appearing non-toxic liquid in glass; ASTM E1; lens front tube, cast aluminum case with enamel finish, cast aluminum adjustable joint with positive locking device; adjustable 360 degrees in horizontal plane, 180 degrees in vertical plane.
1. Size: 9 inch scale.
  2. Window: Clear shatter proof polycarbonate.
  3. Stem: 2.5 inches NPT brass
  4. Accuracy: 2 percentper ASTM E77.
  5. Calibration: Degrees F.

## **2.04 THERMOMETER SUPPORTS**

- A. Socket: Brass separable sockets for thermometer stems with or without extensions as required, and with cap and chain.
- B. Flange: 3 inch outside diameter reversible flange, designed to fasten to sheet metal air ducts, with brass perforated stem.

## **PART 3 EXECUTION**

### **3.01 INSTALLATION**

- A. Install in accordance with manufacturer's instructions.
- B. Install thermometers in piping systems in sockets in short couplings. Enlarge pipes smaller than 2-1/2 inch for installation of thermometer sockets. Ensure sockets allow clearance from insulation.
- C. Install gages and thermometers in locations where they are easily read from normal operating level. Install vertical to 45 degrees off vertical.
- D. Adjust gages and thermometers to final angle, clean windows and lenses, and calibrate to zero.

### **3.02 SCHEDULE**

- A. Pressure Gages, Location and Scale Range:
1. Pumps, 0 to 100 psi.
- B. Pressure Gage Tappings, Location:
1. Control valves 3/4 inch & larger - inlets and outlets.
- C. Stem Type Thermometers, Location and Scale Range:
1. Water zone supply and return, 0 to 240 degrees F.

**END OF SECTION**

**SECTION 23 05 53  
IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Nameplates.
- B. Tags.
- C. Pipe markers.

**1.02 REFERENCE STANDARDS**

- A. ASME A13.1 - Scheme for the Identification of Piping Systems; 2007.
- B. ASTM D709 - Standard Specification for Laminated Thermosetting Materials; 2013.

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements for submittal procedures.
- B. Chart and Schedule: Submit valve chart and schedule, including valve tag number, location, function, and valve manufacturer's name and model number.
- C. Project Record Documents: Record actual locations of tagged valves.

**PART 2 PRODUCTS**

**2.01 IDENTIFICATION APPLICATIONS**

- A. Control Panels: Nameplates.
- B. Instrumentation: Tags.
- C. Major Control Components: Nameplates.
- D. Piping: Pipe markers.
- E. Pumps: Nameplates.
- F. Valves: Tags.

**2.02 NAMEPLATES**

- A. Manufacturers:
  - 1. Brimar Industries, Inc.
  - 2. Kolbi Pipe Marker Co..
  - 3. Seton Identification Products.
  - 4. Letter Color: Black.
  - 5. Letter Height: 1/2 inch.
  - 6. Background Color: White.
  - 7. Plastic: Comply with ASTM D709.

**2.03 TAGS**

- A. Manufacturers:

1. Brady Corporation.
  2. Brimar Industries, Inc.
  3. Kolbi Pipe Marker Co..
  4. Seton Identification Products.
- B. Plastic Tags: Laminated three-layer plastic with engraved black letters on light contrasting background color. Tag size minimum 1-1/2 inch diameter.
- C. Valve Tag Chart: Typewritten letter size list in anodized aluminum frame.

## 2.04 PIPE MARKERS

- A. Manufacturers:
1. Brady Corporation.
  2. Brimar Industries, Inc.
  3. Kolbi Pipe Marker Co..
  4. Seton Identification Products.
- B. Color: Conform to ASME A13.1.
- C. Plastic Pipe Markers: Factory fabricated, flexible, semi- rigid plastic, preformed to fit around pipe or pipe covering; minimum information indicating flow direction arrow and identification of fluid being conveyed.
- D. Plastic Tape Pipe Markers: Flexible, vinyl film tape with pressure sensitive adhesive backing and printed markings.
- E. Color code as follows:
1. Heating, Cooling, and Boiler Feedwater: Green with white letters.

## PART 3 EXECUTION

### 3.01 PREPARATION

- A. Degrease and clean surfaces to receive adhesive for identification materials.

### 3.02 INSTALLATION

- A. Install nameplates with corrosive-resistant mechanical fasteners, or adhesive. Apply with sufficient adhesive to ensure permanent adhesion and seal with clear lacquer.
- B. Install tags with corrosion resistant chain.
- C. Install plastic pipe markers in accordance with manufacturer's instructions.
- D. Install plastic tape pipe markers complete around pipe in accordance with manufacturer's instructions.
- E. Use tags on piping 3/4 inch diameter and smaller.
- F. Identify pipe service, flow direction, and pressure.
- G. Install pipe markers in clear view and align with axis of piping.



- H. Location of pipe identification not to exceed 20 feet on straight runs including risers and drops, adjacent to each valve and Tee, at each side of penetration of structure or enclosure, and at each obstruction.

**END OF SECTION**

**SECTION 23 05 93**  
**TESTING, ADJUSTING, AND BALANCING FOR HVAC**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Testing, adjustment, and balancing of hydronic systems.
- B. Measurement of final operating condition of HVAC systems.

**1.02 REFERENCE STANDARDS**

- A. AABC (NSTSB) - AABC National Standards for Total System Balance, 7th Edition; 2016.
- B. ASHRAE Std 111 - Measurement, Testing, Adjusting, and Balancing of Building HVAC Systems; 2008.
- C. NEBB (TAB) - Procedural Standard for Testing, Adjusting and Balancing of Environmental Systems; 2019, with Errata (2022).
- D. SMACNA (TAB) - HVAC Systems Testing, Adjusting and Balancing; 2002.

**1.03 SUBMITTALS**

- A. Control System Coordination Reports: Communicate in writing to the controls installer all setpoint and parameter changes made or problems and discrepancies identified during TAB that affect, or could affect, the control system setup and operation.
- B. Final Report: Indicate deficiencies in systems that would prevent proper testing, adjusting, and balancing of systems and equipment to achieve specified performance.
  - 1. Revise TAB plan to reflect actual procedures and submit as part of final report.
  - 2. Submit draft copies of report for review prior to final acceptance of Project. Provide final copies for Architect/Engineer and for inclusion in operating and maintenance manuals.
  - 3. Include actual instrument list, with manufacturer name, serial number, and date of calibration.
  - 4. Form of Test Reports: Where the TAB standard being followed recommends a report format use that; otherwise, follow ASHRAE Std 111.
  - 5. Units of Measure: Report data in both I-P (inch-pound) and SI (metric) units.
  - 6. Include the following on the title page of each report:
    - a. Name of Testing, Adjusting, and Balancing Agency.
    - b. Address of Testing, Adjusting, and Balancing Agency.
    - c. Telephone number of Testing, Adjusting, and Balancing Agency.
    - d. Project name.
    - e. Project location.
    - f. Project Architect/Engineer.
    - g. Project Contractor.
    - h. Report date.

**PART 2 PRODUCTS - NOT USED****PART 3 EXECUTION****3.01 GENERAL REQUIREMENTS**

- A. Perform total system balance in accordance with one of the following:
  - 1. AABC (NSTSB), AABC National Standards for Total System Balance.
  - 2. NEBB Procedural Standards for Testing Adjusting Balancing of Environmental Systems.
  - 3. SMACNA (TAB).
- B. Begin work after completion of systems to be tested, adjusted, or balanced and complete work prior to Substantial Completion of the project.
- C. TAB Agency Qualifications:
  - 1. Company specializing in the testing, adjusting, and balancing of systems specified in this section.
  - 2. Having minimum of three years documented experience.
  - 3. Certified by one of the following:
    - a. AABC, Associated Air Balance Council: [www.aabc.com/#sle](http://www.aabc.com/#sle); upon completion submit AABC National Performance Guaranty.
    - b. NEBB, National Environmental Balancing Bureau: [www.nebb.org/#sle](http://www.nebb.org/#sle).
    - c. TABB, The Testing, Adjusting, and Balancing Bureau of National Energy Management Institute: [www.tabbcertified.org/#sle](http://www.tabbcertified.org/#sle).
- D. TAB Supervisor Qualifications: Certified by same organization as TAB agency.

**3.02 EXAMINATION**

- A. Verify that systems are complete and operable before commencing work. Ensure the following conditions:
  - 1. Systems are started and operating in a safe and normal condition.
  - 2. Temperature control systems are installed complete and operable.
  - 3. Proper thermal overload protection is in place for electrical equipment.
  - 4. Hydronic systems are flushed, filled, and vented.
  - 5. Pumps are rotating correctly.
  - 6. Proper strainer baskets are clean and in place.
  - 7. Service and balance valves are open.
- B. Submit field reports. Report defects and deficiencies that will or could prevent proper system balance.
- C. Beginning of work means acceptance of existing conditions.

**3.03 ADJUSTMENT TOLERANCES**

- A. Hydronic Systems: Adjust to within plus or minus 10 percent of design.

**3.04 RECORDING AND ADJUSTING**

- A. Ensure recorded data represents actual measured or observed conditions.

- B. Permanently mark settings of valves, dampers, and other adjustment devices allowing settings to be restored. Set and lock memory stops.
- C. After adjustment, take measurements to verify balance has not been disrupted or that such disruption has been rectified.
- D. Leave systems in proper working order, replacing belt guards, closing access doors, closing doors to electrical switch boxes, and restoring thermostats to specified settings.

### **3.05 WATER SYSTEM PROCEDURE**

- A. Adjust water systems to provide required or design quantities.
- B. Use calibrated Venturi tubes, orifices, or other metered fittings and pressure gages to determine flow rates for system balance. Where flow metering devices are not installed, base flow balance on temperature difference across various heat transfer elements in the system.
- C. Adjust systems to provide specified pressure drops and flows through heat transfer elements prior to thermal testing. Perform balancing by measurement of temperature differential in conjunction with air balancing.
- D. Effect system balance with automatic control valves fully open to heat transfer elements.
- E. Effect adjustment of water distribution systems by means of balancing cocks, valves, and fittings. Do not use service or shut-off valves for balancing unless indexed for balance point.
- F. Where available pump capacity is less than total flow requirements or individual system parts, full flow in one part may be simulated by temporary restriction of flow to other parts.

### **3.06 SCOPE**

- A. Test, adjust, and balance the following:
  - 1. HVAC Pumps.
  - 2. Piping PICV and Circuit Setters.

**END OF SECTION**

**SECTION 23 07 19  
HVAC PIPING INSULATION**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Piping insulation.
- B. Jackets and accessories.

**1.02 RELATED REQUIREMENTS**

- A. Section 23 21 13 - Hydronic Piping: Placement of hangers and hanger inserts.

**1.03 REFERENCE STANDARDS**

- A. ASTM C177 - Standard Test Method for Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded-Hot-Plate Apparatus; 2019, with Editorial Revision (2023).
- B. ASTM C518 - Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus; 2021.
- C. ASTM C534/C534M - Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form; 2014.
- D. ASTM C547 - Standard Specification for Mineral Fiber Pipe Insulation; 2015.
- E. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials; 2023d.
- F. ASTM E96/E96M - Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials; 2023.
- G. UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials; Current Edition, Including All Revisions.

**1.04 SUBMITTALS**

- A. Product Data: Provide product description, thermal characteristics, list of materials and thickness for each service, and locations.
- B. Manufacturer's Instructions: Indicate installation procedures that ensure acceptable workmanship and installation standards will be achieved.

**1.05 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with not less than three years of documented experience.
- B. Applicator Qualifications: Company specializing in performing the type of work specified in this section with minimum three years of experience.

**1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Accept materials on site, labeled with manufacturer's identification, product density, and thickness.

**1.07 FIELD CONDITIONS**

- A. Maintain ambient conditions required by manufacturers of each product.
- B. Maintain temperature before, during, and after installation for minimum of 24 hours.

**PART 2 PRODUCTS****2.01 REGULATORY REQUIREMENTS**

- A. Surface Burning Characteristics: Flame spread index/Smoke developed index of 25/50, maximum, when tested in accordance with ASTM E84 or ASTM E84.

**2.02 GLASS FIBER**

- A. Manufacturers:
  1. CertainTeed Corporation.
  2. Johns Manville Corporation.
  3. Knauf Insulation.
  4. Owens Corning Corporation.
- B. Insulation: ASTM C547; rigid molded, noncombustible.
  1. 'K' Value: ASTM C177, 0.23 at 75 degrees F.
  2. Maximum Service Temperature: 650 degrees F.
  3. Maximum Moisture Absorption: 0.2 percent by volume.
- C. Vapor Barrier Jacket: White kraft paper with glass fiber yarn, bonded to aluminized film; moisture vapor transmission when tested in accordance with ASTM E96/E96M of 0.02 perm-inches.
- D. Vapor Barrier Lap Adhesive: Compatible with insulation.

**2.03 FLEXIBLE ELASTOMERIC CELLULAR INSULATION**

- A. Manufacturer:
  1. Aeroflex USA, Inc; EPDM.
  2. Armacell LLC.
  3. K-Flex USA LLC; Insul-Tube.
- B. Insulation: Preformed flexible elastomeric cellular rubber insulation complying with ASTM C534/C534M Grade 1; use molded tubular material wherever possible.
  1. 'K' Value: ASTM C177, 0.25 at 75 degrees F.
  2. Minimum Service Temperature: Minus 40 degrees F.
  3. Maximum Service Temperature: 250 degrees F.
  4. Maximum Moisture Absorption: ASTM C209, 0.2 percent by volume.
  5. Moisture Vapor Permeability: ASTM E96/E96M, 0.01 perm-inch.
  6. Connection: Waterproof vapor barrier adhesive.
- C. Insulated Pipe Supports: Insulated pipe supports shall be used at pipe hanger/support locations to prevent the insulation from compressing.
  1. Load-bearing rigid foam insert (high-density urethane or equivalent with elastomeric foam collars).
  2. Minimum compressive strength of 72 psi.
  3. Manufacturer;

- a. Aeroflex; Aerofix.
- b. Armacell; Armafix Ecolight.
- c. K-Flex; 360 Insulated Pipe Supp

D. Elastomeric Foam Adhesive: Air dried, contact adhesive, compatible with insulation.

## 2.04 JACKETS

A. PVC Plastic.

1. Manufacturers:
  - a. Johns Manville Corporation.
  - b. Proto Corporation.
2. Jacket: One piece molded type fitting covers and sheet material, color as scheduled.
  - a. Minimum Service Temperature: 0 degrees F.
  - b. Maximum Service Temperature: 150 degrees F.
  - c. Moisture Vapor Permeability: 0.002 perm inch, maximum, when tested in accordance with ASTM E96/E96M.
  - d. Thickness: 10 mil.
  - e. Connections: Brush on welding adhesive.
3. Covering Adhesive Mastic: Compatible with insulation.

B. Aluminum Jacket: ASTM B209 (ASTM B209M) formed aluminum sheet.

1. Thickness: 0.016 inch sheet.
2. Finish: Embossed.
3. Joining: Longitudinal slip joints and 2 inch laps.
4. Fittings: 0.016 inch thick die shaped fitting covers with factory attached protective liner.
5. Metal Jacket Bands: 3/8 inch wide; 0.015 inch thick aluminum.

## PART 3 EXECUTION

### 3.01 EXAMINATION

- A. Verify that piping has been tested before applying insulation materials.
- B. Verify that surfaces are clean and dry, with foreign material removed.

### 3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install in accordance with NAIMA National Insulation Standards.
- C. Exposed Piping: Locate insulation and cover seams in least visible locations.
- D. Insulate entire system including fittings, valves, unions, flanges, strainers, flexible connections, and expansion joints.
- E. Glass fiber insulated pipes conveying fluids below ambient temperature:
  1. Provide vapor barrier jackets, factory-applied or field-applied; secure with self-sealing longitudinal laps and butt strips with pressure sensitive adhesive. Secure with outward clinch expanding staples and vapor barrier mastic.
  2. Insulate fittings, joints, and valves with molded insulation of like material and thickness as adjacent pipe. Finish with glass cloth and vapor barrier adhesive or PVC fitting covers.

- F. For hot piping conveying fluids over 140 degrees F, insulate flanges and unions at equipment.
- G. Glass fiber insulated pipes conveying fluids above ambient temperature.
1. Provide standard jackets, with or without vapor barrier, factory-applied or field-applied. Secure with self-sealing longitudinal laps and butt strips with pressure sensitive adhesive. Secure with outward clinch expanding staples.
  2. Insulate fittings, joints, and valves with insulation of like material and thickness as adjoining pipe. Finish with glass cloth and adhesive or PVC fitting covers.
- H. Inserts and Shields:
1. Application: Piping 1-1/2 inches diameter or larger.
  2. Shields: Galvanized steel between pipe hangers or pipe hanger rolls and inserts.
  3. Insert location: Between support shield and piping and under the finish jacket.
  4. Insert Configuration: Minimum 6 inches long, of same thickness and contour as adjoining insulation; may be factory fabricated.
  5. Insert Material: Hydrous calcium silicate insulation or other heavy density insulating material suitable for the planned temperature range.
- I. Continue insulation through walls, sleeves, pipe hangers, and other pipe penetrations. Finish at supports, protrusions, and interruptions.
- J. Exterior Applications: Provide vapor barrier jacket. Insulate fittings, joints, and valves with insulation of like material and thickness as adjoining pipe, and finish with glass mesh reinforced vapor barrier cement. Cover with aluminum jacket with seams located on bottom side of horizontal piping.
- K. Heat Traced Piping: Insulate fittings, joints, and valves with insulation of like material, thickness, and finish as adjoining pipe. Size large enough to enclose pipe and heat tracer. Cover with aluminum jacket with seams located on bottom side of horizontal piping.
- L. Installation of flexible elastomeric insulation
1. Insulation Installation on Piping Systems:
    - a. Install pipe insulation by sliding non-slit sections over the open ends of pipe when possible or by slitting tubular sections and applying onto piping.
    - b. Pipe shall be sealed while slipping on insulation to prevent foreign matter from entering the tube. Insulation shall be pushed onto the pipe, never pulled. Stretching of insulation may result in open seams and joints.
    - c. All longitudinal seams shall be installed facing down to reduce weight / pressure on the seam.
    - d. All edges shall be clean cut. Rough or jagged edges shall not be permitted. Proper tools such as sharp, non-serrated knives must be used.
    - e. All seams, butts and ends shall be completely sealed to retard moisture vapor from entering the system using compatible contact adhesive. Do not tape insulation joints.
    - f. On below-ambient applications, insulation shall be adhered directly to the pipe using a two-inch strip of compatible contact adhesive on the ID of the insulation and on the pipe at the following locations: high end of the pipe run, every termination point (supports, valves, flanges, end of pipe run), and every 18 feet of the pipe run.
  2. Insulation Installation on Fittings, Valves and Flanges:



- a. All fittings (elbows, tees, p-traps, grooved) shall be insulated with the same insulation thickness as the adjacent piping. All seams and mitered joints shall be adhered with compatible contact adhesive. Screwed fittings shall be sleeved and adhered with a minimum 1" overlap onto the adjacent insulation.
  - b. Valves, flanges, strainers and couplings shall be insulated using fabricated insulation pieces that shall then be covered with sheet or oversized tubular insulation.
3. Insulation Installation on pipe hangers/supports:
    - a. Insulated pipe supports, comprised of high-density rigid foam inserts with elastomeric foam collars, shall be installed at all pipe hanger locations to prevent the insulation from compressing. The pipe support shall have with the same insulation thickness as the pipe insulation. All joints shall be sealed with compatible contact adhesive. Saddles shall be installed under all insulated lines at locations where the hanger may move due to movement in the piping from expansion and contraction.

### 3.03 SCHEDULE

#### A. Heating Systems:

1. Heating Water Supply and Return:
  - a. Interior Pipe - Glass Fiber Insulation:
    - 1) Pipe Size Range: 2 inch and above.
      - a) Thickness: 2 inch.
  - b. Exterior Pipe - Flexible Elastomeric Cellular Insulation:
    - 1) Pipe Size Range: 2 inch and above.
      - a) Thickness: 2 inch.
    - 2) All exterior pipes shall have aluminum jacket.

#### B. Cooling Systems:

1. Chilled Water:
  - a. Glass Fiber Insulation:
    - 1) Pipe Size Range: 2 inch and above.
      - a) Thickness: 1 inch

**END OF SECTION**

**SECTION 23 09 13**  
**INSTRUMENTATION AND CONTROL DEVICES FOR HVAC**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Control Valves:
  - 1. Pressure independent control valves.
- B. Input/Output Sensors:
  - 1. Temperature sensors.
  - 2. Equipment operation (current) sensors.
- C. Transmitters:
  - 1. Pressure transmitters.
  - 2. Water pressure transmitters (liquid differential pressure transmitters).
  - 3. Temperature transmitters.
- D. Flow Sensors:
  - 1. Insertion turbine meters.

**1.02 RELATED REQUIREMENTS**

- A. Section 23 21 13 - Hydronic Piping: Installation of flow switches, temperature sensor sockets, gage taps.
- B. Section 26 05 83 - Wiring Connections: Electrical characteristics and wiring connections.

**1.03 SUBMITTALS**

- A. Product Data: Provide description and engineering data for each control system component. Include sizing as requested. Provide data for each system component and software module.
- B. Shop Drawings: Indicate complete operating data, system drawings, wiring diagrams, and written detailed operational description of sequences. Submit schedule of valves indicating size, flow, and pressure drop for each valve. For automatic dampers indicate arrangement, velocities, and static pressure drops for each system.
- C. Operation and Maintenance Data: Include inspection period, cleaning methods, recommended cleaning materials, and calibration tolerances.

**1.04 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.

**PART 2 PRODUCTS**

**2.01 EQUIPMENT - GENERAL**

- A. Products Requiring Electrical Connection: Listed and classified by Underwriters Laboratories Inc., as suitable for the purpose specified and indicated.

## 2.02 CONTROL VALVES

- A. Manufacturers.
  1. Danfoss; Model AB-QM.
  2. Flow Control Industries; Model DeltaPValve.
  3. Substitutions: See Section 01 60 00 - Product Requirements.
  
- B. Pressure Independent Control Valve.
  1. ASME B16.34 or ASME B16.15, valve bodies shall be two-way normally open or closed. Valve bodies 2 inches and smaller shall be bronze or brass. Valve bodies 2-1/2 inches and larger shall be brass, bronze or iron.
  2. Valve shall be two way globe style, pressure independent, with integrated differential pressure control regulator. Regulation control of pressure shall be by an integrated EPDM diaphragm design, stainless spring, pressure control disc and require no internal maintenance or replaceable cartridges. Pressure control seat shall be brass construction with vulcanized EPDM.
  3. Provide user adjustable maximum flow within valve control range; adjustment method shall indicate percentage of valve flow range and utilize spring locked method of adjustment.
  4. Regulation of internal control valve differential pressure shall provide 100% control valve authority and maintain a linear flow characteristic.
  5. Flow shall be accurately controlled from 0-100% full rated flow with an operating pressure differential range of 4 to 60 psig.
  6. Valve shall provide back seated globe design to allow service of packing under pressure without leakage for valves up to 1-1/4 inches.
  7. Valve shall include PT test ports.
  8. Actuator shall operate the valve through its' full range and have a minimum close off pressure of 90 psig; have the ability to supply on/off, floating, proportional, safety spring and or feedback options; visible position indication; thermostatic, thermal or electronic version as indicated. Actuator shall be from the same manufacturer as the valve manufacturer.
  
- C. Butterfly Pattern:
  1. Iron body, bronze disc, resilient replaceable seat for service to 180 degrees F wafer or lug ends, extended neck.
  2. Hydronic Systems:
    - a. Rate for service pressure of 125 psig at 250 degrees F.
    - b. Size for 1 psig maximum pressure drop at design flow rate.
  
- D. Electronic Operators:
  1. Valves shall spring return to normal position as indicated on freeze, fire, or temperature protection.
  2. Select operator for full shut off at maximum pump differential pressure.
  
- E. Radiation Valves:
  1. Bronze body, bronze trim, 2 or 3 port as indicated, replaceable plugs and seats, union and threaded ends.
  2. Rate for service pressure of 125 psig at 250 degrees F.
  3. Size for 3 psig maximum pressure drop at design flow rate.

4. Two way valves shall have equal percentage characteristics, three way valves linear characteristics. Size two way valve operators to close valves against pump shut off head.
5. Operators (2 Position): Synchronous motor with enclosed gear train, dual return springs, valve position indicator; 24 v DC, 0.4 amp. Valves shall spring return to normal position for temperature protection.
6. Operators (Modulating): Self contained, linear motorized actuator with approximately 3/4 inch stroke, 60 second full travel with transformer and SPDT contacts: 24 v DC, 6 watt maximum input.

## 2.03 INPUT/OUTPUT SENSORS

### A. Temperature Sensors:

1. Use thermistor or RTD type temperature sensing elements with characteristics resistant to moisture, vibration, and other conditions consistent with the application without affecting accuracy and life expectancy.
2. Construct RTD of nickel or platinum with base resistance of 1000 ohms at 70 degrees F.
3. 100 ohm platinum RTD is acceptable if used with project DDC controllers.
4. Temperature Sensing Device: Compatible with project DDC controllers.
5. Performance Characteristics:
  - a. RTD:
    - 1) Chilled Water Accuracy: Plus/minus 0.50 degrees F minimum.
    - 2) All Other Accuracy: Plus/minus 0.75 degrees F minimum.
    - 3) Range: Minus 40 degrees F through 220 degrees F minimum.
  - b. Temperature Transmitter:
    - 1) Accuracy: 0.10 degree F minimum or plus/minus 0.20 percent of span.
    - 2) Output: 4 to 20 mA.
  - c. Sensing Range:
    - 1) Provide limited range sensors if required to sense the range expected for a respective point.
    - 2) Use RTD type sensors for extended ranges beyond minus 30 degrees F to 230 degrees F.
    - 3) Use temperature transmitters in conjunction with RTD's when RTD's are incompatible with DDC controller direct temperature input.
  - d. Wire Resistance:
    - 1) Use appropriate wire size to limit temperature offset due to wire resistance to 1.0 degree F or use temperature transmitter when offset is greater than 1.0 degree F due to wire resistance.
    - 2) Compensate for wire resistance in software input definition when feature is available in the DDC controller.
  - e. Immersion Temperature Sensors: A sensor encased in a corrosion-resistant probe with an indoor junction box service entry body.
  - f. Insertion Elements:
    - 1) Provide dry type, insertion elements for liquids, installed in immersion wells, with minimum insertion length of 2.5 inches.

### B. Equipment Operation (Current) Sensors:

1. Status Inputs for Pumps: Differential pressure switch piped across pump with adjustable pressure differential range of 8 to 60 psi.

2. Status Inputs for Electric Motors: Current sensing relay with current transformers, adjustable and set to 175 percent of rated motor current.

## 2.04 TRANSMITTERS

### A. Pressure Transmitters:

1. One pipe direct acting for gas, liquid, or steam service, range suitable for system, proportional electronic output.

### B. Water Pressure Transmitters (Liquid Differential Pressure Transmitters):

1. General: Provide wet media differential pressure transducers with 6 ft (1.83 m) armored cable, to allow remote pressure sensing capability using existing plumbing runs.
  - a. Input Power: Class 2; 15 to 30 VDC, 24VAC nominal, 50/60 Hz.
  - b. Maximum Current Draw:
    - 1) DC: 125 mA.
    - 2) AC: 280 mA.
  - c. Output: 3-wire transmitter; user-selectable, 4 to 20 mA (0 to 5V/0 to 10V).
  - d. Sensor:
    - 1) Media Compatibility: 17 to 4 PH stainless steel.
    - 2) Status Indication: Dual color LED.
    - 3) Proof Pressure: 2x max. F.S. range.
    - 4) Burst Pressure: 5x max. F.S. range.
    - 5) Accuracy at 77 degrees F for less than or equal 20 ft:
    - 6) Surge Damping: Electronic; 1 second averaging.
    - 7) Long Term Stability: Plus/minus 0.25 percent.
  - e. Pressure Ranges:
    - 1) 0 psi to 50 psi (Gauge): 5 psid/10 psid/25 psid/50 psid (pressure differential).

## 2.05 FLOW SENSORS

### A. Insertion Turbine Flow Meters:

1. Manufacturers:
  - a. Onicon; Model F1210.
2. Furnish dual axial turbine flowmeter with all installation hardware required to enable insertion and removal of the meter without system shutdown.
3. All Parts: Meet or exceed the pressure classification of the piping system installed in.
4. Accuracy for the Insertion Turbine Flow Meter: Plus/minus 0.5 percent of the rate at calibrated velocity, within plus/minus of the rate over a 10 to 1 turn down and within plus/minus 2 percent of the rate over a 50 to 1 turn down.
5. Repeatability: Plus/minus 0.25 percent of reading.
6. The meter flow sensing element to operate over a range suitable for the installed location with a pressure loss limited to 1 percent of operating pressure at maximum flow rate.
7. Include dry contact outputs, 4 to 20 mA, 0 to 10 VDC.
8. Fabricate the turbine rotor assembly of Series 300 stainless steel and use Teflon seats.

## PART 3 EXECUTION

### 3.01 EXAMINATION

- A. Verify existing conditions before starting work.

- B. Verify that systems are ready to receive work.
- C. Beginning of installation means installer accepts existing conditions.
- D. Sequence work to ensure installation of components is complementary to installation of similar components in other systems.
- E. Coordinate installation of system components with installation of mechanical systems equipment such as air handling units and air terminal units.
- F. Ensure installation of components is complementary to installation of similar components.

### **3.02 INSTALLATION**

- A. Install in accordance with manufacturer's instructions.
- B. Mount outdoor reset thermostats and outdoor sensors indoors, with sensing elements outdoors with sun shield.
- C. Provide separable sockets for liquids and flanges for air bulb elements.
- D. Provide valves with position indicators and with pilot positioners where sequenced with other controls.
- E. Mount control panels adjacent to associated equipment on vibration free walls or free standing angle iron supports. One cabinet may accommodate more than one system in same equipment room. Provide engraved plastic nameplates for instruments and controls inside cabinet and engraved plastic nameplates on cabinet face.
- F. Install "hand/off/auto" selector switches to override automatic interlock controls when switch is in "hand" position.
- G. Provide conduit and electrical wiring. Electrical material and installation shall be in accordance with appropriate requirements of Division 26.

**END OF SECTION**

## SECTION 23 21 13 HYDRONIC PIPING

### PART 1 GENERAL

#### 1.01 SECTION INCLUDES

- A. Hydronic system requirements.
- B. Heating water piping, above grade.
- C. Chilled water piping, above grade.
- D. Pipe hangers and supports.
- E. Unions, flanges, mechanical couplings, and dielectric connections.
- F. Valves:
  - 1. Ball valves.
  - 2. Butterfly valves.
  - 3. Check valves.

#### 1.02 RELATED REQUIREMENTS

- A. Section 23 05 53 - IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT.
- B. Section 23 07 19 - HVAC Piping Insulation.
- C. Section 23 21 14 - Hydronic Specialties.
- D. Section 23 25 00 - HVAC Water Treatment: Pipe cleaning.

#### 1.03 REFERENCE STANDARDS

- A. ASME BPVC-IX - Boiler and Pressure Vessel Code, Section IX - Welding, Brazing, and Fusing Qualifications; 2015.
- B. ASME B31.9 - Building Services Piping; 2014.
- C. ASTM A53/A53M - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless; 2012.
- D. ASTM A234/A234M - Standard Specification for Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service; 2015.
- E. ASTM D2000 - Standard Classification System for Rubber Products in Automotive Applications; 2012.
- F. ASTM F708 - Standard Practice for Design and Installation of Rigid Pipe Hangers; 2024.
- G. AWS D1.1/D1.1M - Structural Welding Code - Steel; 2015.
- H. MSS SP-58 - Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation; 2009.

#### 1.04 SUBMITTALS

- A. Welders Certificate: Include welders certification of compliance with ASME BPVC-IX.

- B. Manufacturer's Installation Instructions: Indicate hanging and support methods, joining procedures.
- C. Project Record Documents: Record actual locations of valves.

### **1.05 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: Company specializing in manufacturing products of the type specified in this section, with minimum three years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of the type specified in this section, with minimum three years of experience.
- C. Welder Qualifications: Certify in accordance with ASME BPVC-IX.
  1. Provide certificate of compliance from authority having jurisdiction, indicating approval of welders.

### **1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Accept valves on site in shipping containers with labeling in place. Inspect for damage.
- B. Provide temporary protective coating on cast iron and steel valves.
- C. Provide temporary end caps and closures on piping and fittings. Maintain in place until installation.
- D. Protect piping systems from entry of foreign materials by temporary covers, completing sections of the work, and isolating parts of completed system.

## **PART 2 PRODUCTS**

### **2.01 HYDRONIC SYSTEM REQUIREMENTS**

- A. Comply with ASME B31.9 and applicable federal, state, and local regulations.
- B. Piping: Provide piping, fittings, hangers and supports as required, as indicated, and as follows:
  1. Where more than one piping system material is specified, provide joining fittings that are compatible with piping materials and ensure that the integrity of the system is not jeopardized.
  2. Use non-conducting dielectric connections whenever joining dissimilar metals.
  3. Grooved mechanical joints are not permitted in any location.
  4. Provide pipe hangers and supports in accordance with ASME B31.9 or MSS SP-58 unless indicated otherwise.
- C. Pipe-to-Valve and Pipe-to-Equipment Connections: Use flanges or unions to allow disconnection of components for servicing; do not use direct welded, soldered, or threaded connections.
- D. Valves: Provide valves where indicated:
  1. Provide drain valves where indicated, and if not indicated provide at least at main shut-off, low points of piping, bases of vertical risers, and at equipment. Use 3/4 inch gate valves with cap; pipe to nearest floor drain.
  2. Isolate equipment using butterfly valves with lug end flanges or grooved mechanical couplings.
  3. In heating water systems, butterfly valves may be used interchangeably with gate and globe valves.
  4. For shut-off and to isolate parts of systems or vertical risers, use butterfly valves.
- E. Welding Materials and Procedures: Conform to ASME BPVC-IX.



## 2.02 HEATING WATER PIPING, ABOVE GRADE

- A. Steel Pipe: ASTM A53/A53M, Schedule 40, black, using one of the following joint types:
  - 1. Welded Joints: ASTM A234/A234M, wrought steel welding type fittings; AWS D1.1/D1.1M welded.

## 2.03 CHILLED WATER PIPING (GLYCOL), ABOVE GRADE

- A. Steel Pipe: ASTM A53/A53M, Schedule 40, black; using one of the following joint types:
  - 1. Welded Joints: ASTM A234/A234M, wrought steel welding type fittings; AWS D1.1/D1.1M welded.

## 2.04 PIPE HANGERS AND SUPPORTS

- A. Provide hangers and supports that comply with MSS SP-58.
  - 1. If type of hanger or support for a particular situation is not indicated, select appropriate type using MSS SP-58 recommendations.
- B. Hangers for Cold Pipe Sizes 2 Inches and Greater: Carbon steel, adjustable, clevis.
- C. Hangers for Hot Pipe Sizes 2 to 4 Inches: Carbon steel, adjustable, clevis.
- D. Multiple or Trapeze Hangers: Steel channels with welded spacers and hanger rods.
- E. Wall Support for Pipe Sizes 4 Inches and Greater: Welded steel bracket and wrought steel clamp.
- F. Vertical Support: Steel riser clamp.
- G. Floor Support for Hot Pipe Sizes to 4 Inches: Cast iron adjustable pipe saddle, lock nut, nipple, floor flange, and concrete pier or steel support.
- H. Hanger Rods: Mild steel threaded both ends, threaded one end, or continuous threaded.
- I. Inserts: Malleable iron case of galvanized steel shell and expander plug for threaded connection with lateral adjustment, top slot for reinforcing rods, lugs for attaching to forms; size inserts to suit threaded hanger rods.

## 2.05 UNIONS, FLANGES, MECHANICAL COUPLINGS, AND DIELECTRIC CONNECTIONS

- A. Flanges for Pipe 2 Inches and Greater:
  - 1. Ferrous Piping: 150 psig forged steel, slip-on.
  - 2. Copper Piping: Bronze.
  - 3. Gaskets: 1/16 inch thick preformed neoprene.
- B. Dielectric Connections:
  - 1. Waterways:
    - a. Water impervious insulation barrier capable of limiting galvanic current to 1 percent of short circuit current in a corresponding bimetallic joint.
    - b. Dry insulation barrier able to withstand 600 volt breakdown test.
    - c. Construct of galvanized steel with threaded end connections to match connecting piping.
    - d. Suitable for the required operating pressures and temperatures.
  - 2. Flanges:
    - a. Dielectric flanges with same pressure ratings as standard flanges.

- b. Water impervious insulation barrier capable of limiting galvanic current to 1 percent of short circuit current in a corresponding bimetallic joint.
- c. Dry insulation barrier able to withstand 600 volt breakdown test.
- d. Construct of galvanized steel with threaded end connections to match connecting piping.
- e. Suitable for the required operating pressures and temperatures.

## 2.06 BALL VALVES

### A. Manufacturers:

- 1. Nibco, Inc; Model S-585-70-66.
- 2. Watts.
- 3. Apollo.

### B. Up To and Including 2 Inches:

- 1. Bronze one piece body, chrome plated brass ball, teflon seats and stuffing box ring, lever handle with balancing stops, solder ends with union.

### C. Over 2 Inches:

- 1. Ductile iron body, chrome plated stainless steel ball, teflon or Virgin TFE seat and stuffing box seals, lever handle, flanged ends, rated to 800 psi.

## 2.07 BUTTERFLY VALVES

### A. Manufacturers:

- 1. Nibco; Model LD 2000.
- 2. Crane Valve.
- 3. Milwaukee Valve Company.

### B. Body: Ductile iron with resilient molded-in EPDM seat, lug ends, extended neck.

### C. Disc: Construct of aluminum bronze, geometric drive (one piece stem, no pin through disc).

### D. Stem: Stainless steel with stem offset from the centerline to provide full 360 degree circumferential setting.

### E. Operator: 10 position lever handle.

## 2.08 SPRING LOADED CHECK VALVES

### A. Manufacturers:

- 1. Nibco, Inc.
- 2. Hammond Valve.
- 3. Milwaukee Valve Company.

### B. Iron body, bronze trim, split plate, hinged with stainless steel spring, resilient seal bonded to body, wafer or threaded lug ends.

## PART 3 EXECUTION

### 3.01 PREPARATION

- A. Ream pipe and tube ends. Remove burrs. Bevel plain end ferrous pipe.
- B. Remove scale and dirt on inside and outside before assembly.

- C. Prepare piping connections to equipment using jointing system specified.
- D. Keep open ends of pipe free from scale and dirt. Protect open ends with temporary plugs or caps.
- E. After completion, fill, clean, and treat systems. Refer to Section 23 25 00 for additional requirements.

### 3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Route piping in orderly manner, parallel to building structure, and maintain gradient.
- C. Install piping to conserve building space and to avoid interfere with use of space.
- D. Group piping whenever practical at common elevations.
- E. Sleeve pipe passing through partitions, walls and floors.
- F. Provide sleeve and watertight mechanical seal on all underground floor and wall penetrations.
- G. Slope piping and arrange to drain at low points.
- H. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment.
- I. Pipe Hangers and Supports:
  1. Install in accordance with ASME B31.9, ASTM F708, or MSS SP-58.
  2. Support horizontal piping as scheduled.
  3. Install hangers to provide minimum 1/2 inch space between finished covering and adjacent work.
  4. Place hangers within 12 inches of each horizontal elbow.
  5. Use hangers with 1-1/2 inch minimum vertical adjustment. Design hangers for pipe movement without disengagement of supported pipe.
  6. Support vertical piping at every other floor. Support riser piping independently of connected horizontal piping.
  7. Where several pipes can be installed in parallel and at same elevation, provide multiple or trapeze hangers.
- J. Provide clearance in hangers and from structure and other equipment for installation of insulation and access to valves and fittings. Refer to Section 23 07 19.
- K. Use eccentric reducers to maintain top of pipe level.
- L. Install valves with stems upright or horizontal, not inverted.

### 3.03 SCHEDULES

- A. Hanger Spacing for Steel Piping.
  1. 1/2 inch, 3/4 inch, and 1 inch: Maximum span, 7 feet; minimum rod size, 1/4 inch.
  2. 1-1/4 inches: Maximum span, 8 feet; minimum rod size, 3/8 inch.
  3. 1-1/2 inches: Maximum span, 9 feet; minimum rod size, 3/8 inch.
  4. 2 inches: Maximum span, 10 feet; minimum rod size, 3/8 inch.
  5. 2-1/2 inches: Maximum span, 11 feet; minimum rod size, 3/8 inch.

6. 3 inches: Maximum span, 12 feet; minimum rod size, 3/8 inch.
7. 4 inches: Maximum span, 14 feet; minimum rod size, 1/2 inch.

**END OF SECTION**

## **SECTION 23 21 14 HYDRONIC SPECIALTIES**

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

- A. Air vents.
- B. Strainers.
- C. Combination pump discharge valves.
- D. Balancing valves.

#### **1.02 RELATED REQUIREMENTS**

- A. Section 23 21 13 - Hydronic Piping.
- B. Section 23 25 00 - HVAC Water Treatment: Pipe cleaning.

#### **1.03 REFERENCE STANDARDS**

- A. ASME BPVC-VIII-1 - Boiler and Pressure Vessel Code, Section VIII, Division 1 - Rules for Construction of Pressure Vessels; 2015.

#### **1.04 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide product data for manufactured products and assemblies required for this project. Include component sizes, rough-in requirements, service sizes, and finishes. Include product description and model.
- C. Project Record Documents: Record actual locations of flow controls.
- D. Maintenance Data: Include installation instructions, assembly views, lubrication instructions, and replacement parts list.

#### **1.05 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: Company specializing in manufacturing the type of products specified in this section, with minimum three years of documented experience.

#### **1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Accept valves on site in shipping containers with labeling in place. Inspect for damage.
- B. Provide temporary end caps and closures on piping and fittings. Maintain in place until installation.
- C. Protect piping systems from entry of foreign materials by temporary covers, completing sections of the work, and isolating parts of completed system.

### **PART 2 PRODUCTS**

#### **2.01 AIR VENTS**

- A. Manufacturers:

1. ITT Bell & Gossett.
  2. Taco, Inc.
  3. Armstrong Fluid Technology.
- B. Manual Type: Short vertical sections of 2 inch diameter pipe to form air chamber, with 1/8 inch brass needle valve at top of chamber.
- C. Float Type:
1. Cast iron body and cover, float, bronze pilot valve mechanism suitable for system operating temperature and pressure; with isolating valve.

## 2.02 STRAINERS

- A. Manufacturers:
1. ITT Bell & Gossett.
  2. Armstrong Fluid Technology.
  3. Taco, Inc.
- B. Size 2-1/2 inch to 4 inch:
1. Provide flanged iron body for 175 psi working pressure, Y pattern with 3/64 inch stainless steel perforated screen.

## 2.03 COMBINATION PUMP DISCHARGE VALVES

- A. Manufacturers:
1. Armstrong.
  2. ITT Bell & Gossett.
  3. Taco, Inc.
- B. Valves: Straight or angle pattern, flanged cast-iron valve body with bolt-on bonnet for 175 psi operating pressure, non-slam check valve with spring-loaded bronze disc and seat, stainless steel stem, and calibrated adjustment permitting flow regulation.

## 2.04 BALANCING VALVES

- A. Manufacturers:
1. ITT Bell & Gossette.
  2. Armstrong Fluid Technology.
  3. Taco, Inc.
- B. Size 2.5 inch and Larger:
1. Provide ball or globe style with flow balancing, flow measurement, and shut-off capabilities, memory stops, minimum of two metering ports and flanged connections.
  2. Valve body construction materials consist of cast iron.
  3. Internal components construction materials consist of brass, Teflon, or EPDM.

## PART 3 EXECUTION

### 3.01 INSTALLATION

- A. Install specialties in accordance with manufacturer's instructions.
- B. Provide manual air vents at system high points and as indicated.

- C. Provide valved drain and hose connection on strainer blow down connection.
- D. Provide combination pump discharge valve on discharge side of centrifugal pumps where indicated.

**END OF SECTION**

## **SECTION 23 21 23 HYDRONIC PUMPS**

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

- A. Close-coupled pumps.

#### **1.02 RELATED REQUIREMENTS**

- A. Section 23 21 13 - Hydronic Piping.
- B. Section 23 21 14 - Hydronic Specialties.
- C. Section 26 05 83 - Wiring Connections: Electrical characteristics and wiring connections.

#### **1.03 REFERENCE STANDARDS**

- A. UL 778 - Standard for Motor-Operated Water Pumps; Current Edition, Including All Revisions.

#### **1.04 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide certified pump curves showing performance characteristics with pump and system operating point plotted. Include NPSH curve when applicable. Include electrical characteristics and connection requirements.
- C. Operation and Maintenance Data: Include installation instructions, assembly views, lubrication instructions, and replacement parts list.

#### **1.05 QUALITY ASSURANCE**

- A. Manufacturer Qualifications: Company specializing in manufacture, assembly, and field performance of pumps, with minimum three years of documented experience.

### **PART 2 PRODUCTS**

#### **2.01 HVAC PUMPS - GENERAL**

- A. Provide pumps that operate at specified system fluid temperatures without vapor binding and cavitation, are non-overloading in parallel or individual operation, and operate within 25 percent of midpoint of published maximum efficiency curve.
- B. Products Requiring Electrical Connection: Listed and classified by UL as suitable for the purpose specified and indicated.

#### **2.02 CLOSE COUPLED PUMPS**

- A. Manufacturers;
  - 1. Bell & Gossett; Model PL-45.
  - 2. Armstrong Fluid Technology.
  - 3. Taco.
- B. Type: Horizontal shaft, single stage, close coupled, radially split casing, for 150 psi maximum working pressure.



- C. Casing: Cast iron, with suction and discharge gauge ports, renewable bronze casing wearing rings, seal flush connection, drain plug, flanged suction and discharge.
- D. Impeller: 30% glass filled Noryl, fully enclosed, keyed to motor shaft extension.
- E. Shaft: Carbon steel with a stainless steel shaft sleeve.
- F. Seal: Mechanical seal, 225 degrees F maximum continuous operating temperature.
- G. Motor bearings: Sealed precision steel ball bearing, permanently lubricated.
- H. Electrical Characteristics:
  - 1. Refer to Schedule on drawings.

### **PART 3 EXECUTION**

#### **3.01 PREPARATION**

- A. Verify that electric power is available and of the correct characteristics.

#### **3.02 INSTALLATION**

- A. Install in accordance with manufacturer's instructions.
- B. Provide access space around pumps for service. Provide no less than minimum space recommended by manufacturer.
- C. Provide line sized shut-off valve and strainer on pump suction, and line sized soft seat check valve and balancing valve on pump discharge.

**END OF SECTION**

**SECTION 23 25 00  
HVAC WATER TREATMENT**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Materials.
  - 1. System cleaner.
  - 2. Closed system treatment (water).

**1.02 RELATED REQUIREMENTS**

- A. Section 23 21 13 - Hydronic Piping.
- B. Section 23 21 14 - Hydronic Specialties.

**1.03 REGULATORY REQUIREMENTS**

- A. Conform to applicable code for addition of non-potable chemicals to building mechanical systems and to public sewage systems.
- B. Products Requiring Electrical Connection: Listed and classified by UL as suitable for the purpose specified and indicated.

**PART 2 PRODUCTS**

**2.01 MANUFACTURERS**

- A. IWM; Owner's campus service provider. Contract with IWM for all cleaning and chemical requirements. Larry McCarthy, 847-875-7190.

**2.02 MATERIALS**

- A. System Cleaner:
  - 1. Liquid alkaline compound with emulsifying agents and detergents to remove grease and petroleum products; sodiumtripoly phosphate and sodium molybdate.
- B. Closed System Treatment (Water):
  - 1. Sequestering agent to reduce deposits and adjust pH; polyphosphate.
  - 2. Corrosion inhibitors; boron-nitrite, sodium nitrite and borax, sodium totyltriazole, low molecular weight polymers, phosphonates, sodium molybdate, or sulphites.
  - 3. Conductivity enhancers; phosphates or phosphonates.

**PART 3 EXECUTION**

**3.01 PREPARATION**

- A. Systems shall be operational, filled, started, and vented prior to cleaning. Use water meter to record capacity in each system.

**3.02 CLEANING SEQUENCE**

- A. Concentration:
  - 1. As recommended by manufacturer.
- B. Hot Water Heating Systems:

1. Apply heat while circulating, slowly raising temperature to 160 degrees F and maintain for 12 hours minimum.
  2. Remove heat and circulate to 100 degrees F or less; drain systems as quickly as possible and refill with clean water.
  3. Circulate for 6 hours at design temperatures, then drain.
  4. Refill with clean water and repeat until system cleaner is removed.
- C. Chilled Water Systems:
1. Circulate for 48 hours, then drain systems as quickly as possible.
  2. Refill with clean water, circulate for 24 hours, then drain.
  3. Refill with clean water and repeat until system cleaner is removed.
- D. Use neutralizer agents on recommendation of system cleaner supplier and approval of Architect/Engineer.
- E. Remove, clean, and replace strainer screens.
- F. Inspect, remove sludge, and flush low points with clean water after cleaning process is completed. Include disassembly of components as required.

### **3.03 INSTALLATION**

- A. Install in accordance with manufacturer's instructions.

**END OF SECTION**

**SECTION 26 05 00**  
**BASIC ELECTRICAL REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Basic Electrical Requirements and materials specifically applicable to Division 26 Sections.  
Section includes:
  - 1. Electrical Identification.
  - 2. Minor Demolition.
  - 3. Conductors and Devices.
  - 4. Raceways and Boxes.
  - 5. Supporting Devices.

**1.02 REGULATORY REQUIREMENTS**

- A. Conform to construction standards as adopted by the Illinois Community College Board to include:
  - 1. International Building Code - 2018 Edition.
  - 2. National Electrical Code ANSI/NFPA 70 - 2020 Edition.
  - 3. Life Safety Code NFPA 101 - 2018 Edition.
  - 4. Fire Prevention and Safety - 41ILCS100.
- B. Conform to building codes as adopted by the local authority having jurisdiction, where applicable.
- C. Install electrical Work in accordance with the NECA Standard of Installation.

**1.03 DELIVERY, STORAGE AND HANDLING**

- A. Store and protect all materials as specified under the provisions of Section 01 60 00 and as specified herein.
- B. Deliver products to the project properly identified with names, model numbers, types, grades, compliance labels, and other information needed for identification.
- C. Ship products to the job site in their original packaging. Receive and store products in a suitable manner to prevent damage or deterioration. Keep equipment upright at all times.
- D. Investigate the spaces through which equipment must pass to reach its final destination.  
Coordinate with the manufacturer to arrange delivery at the proper stage of construction and to provide shipping splits where necessary.

**1.04 PROJECT/SITE CONDITIONS**

- A. Install work in locations shown on Drawings, unless prevented by Project conditions. Drawings have omitted certain branch circuitry in areas for ease of reading. All branch circuitry is to be provided by Contractor.
- B. Prepare drawings showing proposed rearrangement of Work to meet Project conditions, including changes to Work specified in other Sections. Obtain permission from Architect/Engineer before proceeding as specified under modification procedures.

**1.05 QUALITY ASSURANCE**

- A. Provide Work as required for a complete and operational electrical installation.

- B. All products shall be designed, manufactured, and tested in accordance with industry standards. Standards, organizations, and their abbreviations as used hereafter, include the following:
1. American National Standards Institute, Inc (ANSI).
  2. American Society for Testing and Materials (ASTM).
  3. National Electrical Manufacturers Association (NEMA).
  4. Underwriters Laboratories, Inc. (UL).
- C. Install all Work in accordance with the NECA Standard of Installation.

## 1.06 PROJECT MANAGEMENT AND COORDINATION

- A. Proper project management and coordination is critical for a successful project. Manage and coordinate the Work with all other trades in accordance with Section 01 30 00 requirements. Reliance on the Drawings and Specifications only for exact project requirements is insufficient for proper coordination.

## PART 2 PRODUCTS

### 2.01 WIRING METHODS

- A. All locations: Building wire in raceway.
- B. Use no wire smaller than 12 AWG for power and lighting circuits, and no smaller than 14 AWG for control wiring.
1. Use 10 AWG conductor for 20 ampere, 120 volt branch circuit home runs longer than 100 feet. Use minimum #10 AWG conductor wire in all the following locations:
    - a. All programmable panel branch circuits (larger where indicated).
    - b. All emergency lighting and exit branch circuits.

### 2.02 WIRE AND CABLE

- A. Manufacturers:
1. Okonite.
  2. Southwire.
  3. Collyer.
- B. Building Wire:
1. Feeders and Branch Circuits Larger Than 6 AWG: Copper, stranded conductor, 600 volt insulation.
  2. Feeders and Branch Circuits 6 AWG and Smaller: Copper conductor, 600 volt insulation. 6 and 8 AWG, stranded conductor; smaller than 8 AWG, stranded conductor (solid for device terminations).
  3. Control Circuits: Copper, stranded conductor, 600 volt insulation.
  4. Use 10 AWG conductors for 20 ampere, 120 volt branch circuits longer than 75 feet.
  5. Use conductor not smaller than 12 AWG for power and lighting circuits.
  6. Use conductor not smaller than 16 AWG for control circuits.
- C. Locations:
1. Concealed Dry Interior Locations: Use only building wire with Type THHN insulation in raceway.
  2. Exposed Dry Interior Locations: Use only building wire with Type THHN insulation in raceway.

3. Above Accessible Ceilings: Use only building wire with Type THHN insulation in raceway.
4. Wet or Damp Interior Locations: Use only building wire with Type THWN insulation in raceway.
5. Exterior Locations: Use only building wire with Type XHHW insulation in raceway.

### **2.03 RACEWAY REQUIREMENTS**

- A. Use only specified raceway in the following locations:
  1. Branch Circuits and Feeders:
    - a. Concealed Dry Interior Locations: Electrical metallic tubing.
    - b. Exposed Dry Interior Finished Locations: Electrical metallic tubing.
    - c. Exposed Dry Interior Unfinished Locations: Electrical metallic tubing.
    - d. All other locations: Galvanized Rigid Metallic Conduit.
- B. Size raceways for conductor type installed.
  1. Minimum Size Conduit Homerun to Panelboard: 3/4-inch.

### **2.04 METALLIC CONDUIT AND FITTINGS**

- A. Conduit:
  1. Rigid Steel Conduit: ANSI C80.1.
  2. Electrical metallic tubing: ANSI C80.3.
  3. Flexible Conduit: UL 1, zinc-coated steel.
    - a. Liquidtight Flexible Conduit: UL360. Fittings shall be specifically approved for use with this raceway.
- B. Conduit Fittings:
  1. Metal Fittings and Conduit Bodies: NEMA FB 1.
    - a. EMT fittings: Use compression type fittings.

### **2.05 CONDUIT HANGERS**

- A. Manufacturers:
  1. Minerrallac Electric Company.
  2. Substitutions: Or Approved Equal.
- B. Description:
  1. Standard conduit hanger, zinc-plated steel with bolts.
  2. Threaded rod and hardware: Plated finish, size and length as required for loading and conditions.

### **2.06 BEAM CLAMPS**

- A. Manufacturers:
  1. Appleton.
  2. Midwest.
  3. Raco.
- B. Description: Malleable beam clamp, zinc plated steel.

### **2.07 ELECTRICAL BOXES**

- A. Manufacturers:
  1. Raco.

2. Steel City.
3. Appleton.
4. Substitutions: Or Approved Equal.

B. Sheet Metal Outlet Boxes: ANSI/NEMA OS 1, galvanized steel, suitable for installation in masonry:

C. Equipment Support Boxes: Rated for weight of equipment supported; include 2 inch male fixture studs where required.

## **2.08 PENETRATION SEALANTS**

A. Fire-rated assemblies: Provide firestopping of all penetrations made by Work.

B. Thermal and Moisture Protection: Provide thermal and moisture protection made by Work.

## **2.09 NAMEPLATES AND LABELS**

A. Nameplates: Engraved three-layer laminated plastic, black letters on white background.

B. Locations:

1. Each electrical distribution and control equipment enclosure.

C. Letter Size:

1. Use 1/8 inch letters for identifying individual equipment and loads.
2. Use 1/4 inch letters for identifying grouped equipment and loads.

D. Labels: Embossed adhesive tape, with 3/16 inch white letters on a black background. Use only for identification of individual wall switches and receptacles and control device stations.

## **2.10 WIRE AND CABLE MARKERS**

A. Manufacturers:

1. Brady Model PCPS.
2. Panduit Model PCM.
3. T & B Model WM.

B. Description: Cloth type wire markers.

C. Locations: Each conductor at panelboard gutters, pull boxes, and each load connection.

D. Legend:

1. Power and Lighting Circuits: Branch circuit or feeder number indicated on drawings.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION AND PREPARATION**

A. Demolition Drawings are based on casual field observation and are intended to identify the limits of the construction site. Remove all electrical systems in their entirety in proper sequence with the Work.

B. Disconnect electrical systems in walls, floors, and ceilings for removal.

C. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on energized equipment or circuits, use personnel experienced in such operations.

- D. Beginning of demolition means installer accepts existing conditions.
- E. Verify that supporting surfaces are ready to receive work.
- F. Electrical boxes are shown on Drawings, in approximate locations, unless dimensioned.
  1. Obtain verification from Architect/Engineer for locations of outlets throughout prior to rough-in.
- G. Degrease and clean surfaces to receive wire markers.
- H. Verify that interior of building is physically protected from weather.
- I. Verify that mechanical work which is likely to injure conductors has been completed.
- J. Completely and thoroughly swab raceway system before installing conductors.

### **3.02 DEMOLITION AND EXTENSION OF EXISTING ELECTRICAL WORK**

- A. Remove all existing electrical installations to accommodate new construction.
- B. Remove abandoned wiring to source of supply.
- C. Remove exposed abandoned conduit, including abandoned conduit above accessible ceiling finishes. Cut conduit flush with walls and floors, and patch surfaces.
- D. Repair adjacent construction and finishes damaged during demolition and extension work.

### **3.03 APPLICATION**

- A. Install nameplate and label parallel to equipment lines.
- B. Secure nameplate to equipment front using screws.
- C. Secure nameplates to inside surface of door on panelboard that is recessed in finished locations.
- D. Identify underground conduits using underground warning tape. Install one tape per trench at 3 inches below finished grade.
- E. Neatly train and secure wiring inside boxes, equipment, and panelboards.
- F. Route wire and cable as required to meet project conditions.
  1. Wire and cable routing indicated is approximate unless dimensioned.
  2. Where wire and cable destination is indicated and routing is not shown, determine exact routing and lengths required.
- G. Pull all conductors into raceway at same time.
- H. Protect exposed cable from damage.
- I. Neatly train and lace wiring inside boxes, equipment and panelboards.
- J. Support cables above accessible ceilings to keep them from resting on ceiling tiles.
- K. Make splices, taps, and terminations to carry full ampacity of conductors without perceptible temperature rise.
- L. Provide anchors, fasteners, and supports in accordance with NECA "Standard of Installation".
- M. Do not fasten supports to pipes, ducts, mechanical equipment, and conduit.



- N. Do not use powder-actuated anchors.
- O. Do not drill or cut structural members.
- P. Fabricate supports from structural steel or steel channel. Rigidly weld members or use hexagon head bolts to present neat appearance with adequate strength and rigidity. Use spring lock washers under all nuts.
- Q. Install surface-mounted cabinets and panelboards with minimum of four anchors.
- R. Terminate spare conductors with electrical tape.

**END OF SECTION**

## **SECTION 26 05 83 WIRING CONNECTIONS**

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

- A. Electrical connections to equipment and devices not an integral part of the electrical distribution system.

#### **1.02 RELATED REQUIREMENTS**

- A. Section 26 05 00 - Basic Electrical Requirements

#### **1.03 REFERENCE STANDARDS**

- A. NEMA WD 1 - General Color Requirements for Wiring Devices; 1999 (R 2010).

#### **1.04 ADMINISTRATIVE REQUIREMENTS**

- A. Provide conduit rough-in and electrical connection to powered equipment and devices identified in the Project Manual and on the Drawings. Refer specifically, but not limited to, these Specification Sections for further information:
  - 1. Section 23 07 19 - HVAC
  - 2. Section 23 21 23 - Hydronic Pumps.
- B. Coordination: Determine connection locations and requirements for furniture, equipment and devices furnished or provided under other sections.
  - 1. Do not rely solely on the Drawings and Project Manual for execution of the Work of this Section.
  - 2. Obtain and review shop drawings, product data, manufacturer's wiring diagrams, and manufacturer's instructions.
  - 3. Include necessary field evaluation time to inspect connection requirements.
  - 4. Coordinate with other trades to determine exact rough-in requirements.
- C. Sequencing:
  - 1. Install rough-in of electrical connections before installation of furniture and equipment is required.
  - 2. Make electrical connections before required start-up of equipment.

#### **1.05 QUALITY ASSURANCE**

- A. Conform to requirements of NFPA 70.
- B. Products: Listed, classified, and labeled as suitable for the purpose intended.

### **PART 2 PRODUCTS**

#### **NOT USED**

### **PART 3 EXECUTION**

#### **3.01 EXAMINATION**

- A. Verify that equipment is ready for electrical connection, wiring, and energization.

### **3.02 ELECTRICAL CONNECTIONS**

- A. Make electrical connections in accordance with equipment manufacturer's instructions.
- B. Make conduit connections to equipment using flexible conduit. Use liquidtight flexible conduit with watertight connectors in damp or wet locations.
- C. Connect heat producing equipment using wire and cable with insulation suitable for temperatures encountered.
- D. Provide receptacle outlet to accommodate connection with attachment plug.
- E. Provide cord and cap where field-supplied attachment plug is required.
- F. Install suitable strain-relief clamps and fittings for cord connections at outlet boxes and equipment connection boxes.
- G. Install disconnect switches, controllers, control stations, and control devices to complete equipment wiring requirements.
- H. Install terminal block jumpers to complete equipment wiring requirements.
- I. Install interconnecting conduit and wiring between devices and equipment to complete equipment wiring requirements.

**END OF SECTION**

## SECTION 26 24 16 PANELBOARDS

### PART 1 GENERAL

#### 1.01 SECTION INCLUDES

- A. Overcurrent protective devices for panelboards.

#### 1.02 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
  - 1. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances for electrical equipment required by NFPA 70.
  - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.

#### 1.03 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

#### 1.04 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store panelboards in accordance with manufacturer's instructions and NECA 407.
- B. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- C. Handle carefully in accordance with manufacturer's written instructions to avoid damage to panelboard internal components, enclosure, and finish.

### PART 2 PRODUCTS

#### 2.01 MANUFACTURERS

- A. Panelboard 18: ABB/GE; [www.geindustrial.com/#sle](http://www.geindustrial.com/#sle). Match existing panelboard.
- B. Panel EM3V: Schneider Electric; Square D Products: [www.schneider-electric.us](http://www.schneider-electric.us). Match existing panelboard.

#### 2.02 OVERCURRENT PROTECTIVE DEVICES

- A. Molded Case Circuit Breakers:
  - 1. Description: Quick-make, quick-break, over center toggle, trip-free, trip-indicating circuit breakers listed and labeled as complying with UL 489, and complying with FS W-C-375 where applicable; ratings, configurations, and features as indicated on the drawings.
  - 2. Interrupting Capacity:
    - a. Provide circuit breakers with interrupting capacity as required to provide the short circuit current rating indicated, but not less than:
      - 1) 10,000 rms symmetrical amperes at 240 VAC or 208 VAC.

- 2) 14,000 rms symmetrical amperes at 480 VAC.
- b. Fully Rated Systems: Provide circuit breakers with interrupting capacity not less than the short circuit current rating indicated.
3. Conductor Terminations:
  - a. Provide mechanical lugs unless otherwise indicated.
  - b. Lug Material: Copper, suitable for terminating copper conductors only.
4. Multi-Pole Circuit Breakers: Furnish with common trip for all poles.
5. Do not use tandem circuit breakers.
6. Do not use handle ties in lieu of multi-pole circuit breakers.
7. Provide multi-pole circuit breakers for multi-wire branch circuits as required by NFPA 70.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that field measurements are as indicated.
- B. Verify that the ratings and configurations of the panelboards and associated components are consistent with the indicated requirements.
- C. Verify that conditions are satisfactory for installation prior to starting work.

### **3.02 INSTALLATION**

- A. Perform work in accordance with NECA 1 (general workmanship).
- B. Install products in accordance with manufacturer's instructions.
- C. Install all field-installed branch devices, components, and accessories.
- D. Provide filler plates to cover unused spaces in panelboards.
- E. Provide typed or neatly handwritten circuit directory for each branch circuit panelboard. Revise directory to reflect circuiting changes required to balance phase loads.

### **3.03 ADJUSTING**

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.
- B. Adjust alignment of panelboard fronts.
- C. Load Balancing: For each panelboard, rearrange circuits such that the difference between each measured steady state phase load does not exceed 20 percent and adjust circuit directories accordingly. Maintain proper phasing for multi-wire branch circuits.

### **3.04 CLEANING**

- A. Clean dirt and debris from panelboard enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

**END OF SECTION**



# CONTRACT AGREEMENT

Purchase Order#: XXXXXX Account #: XXX-XXX-XXX.XXX

Date: XXXXXX

Project: XXXXX

Between:

Joliet Junior College  
1215 Houbolt Road  
Joliet, Illinois 60431

AND

Contractor  
Address  
Address

In the amount of \$ xxxxxxxxxxxxxxxxxxxxxxxxxxxx and 00/100

## ARTICLE 1

### THE WORK

1.1 The Trade Contractor and JJC agree that the materials and equipment to be furnished and the work to be done by the Trade Contractor are as follows:

The Contract Sum includes, but is not limited to the following:

- 110% Performance and payment bond to Joliet Junior College, Illinois Community College District No. 525
- Insurance in accordance with Schedule "A" Insurance Requirements.

The Contract Sum excludes the following:

- All sales, consumer, use and other similar taxes on equipment and materials incorporated into the work for this project. Tax Exempt No E9992-4773-06 for Joliet Junior College, Illinois Community College District No. 525

1.2 The Trade Contractor shall be held accountable for the following Project related responsibilities: furnish all labor and supervision; furnish, supply and install all equipment, material supplies, tools, scaffolding, hoisting, transportation, unloading and handling; do all things required to complete the work described above on the Project all in accordance with the drawings, documents and specifications prepared by the Architect/Engineer/Owner; and furnish all necessary information, shop drawings, details, samples, brochures,

etc. for Owner/Architect approval, as may be required.

---

**ARTICLE 2**

**TIME OF COMMENCEMENT AND COMPLETION**

2.1 Trade Contractor shall start the work upon notice to proceed and shall execute the work with diligence and so as to maintain such schedules and milestones as established by JJC’s Construction Manager. The Trade Contractor agrees to complete portions and the whole of the work by the following anticipated dates:

2.2 The Trade Contractor is cautioned that schedules and milestones are subject to review and revision. It is the sole responsibility of the Trade Contractor to attend job meetings, keep itself informed of any revisions, and conform to any such revisions.

2.3 In the event that the Trade Contractor should fail to maintain JJC’s progress schedule or the schedule as established above, the JJC Construction Manager reserves the right, after 48 hours formal notice, either by letter or confirmed email to the Trade Contractor, to procure the materials, equipment, and labor necessary to proceed with, or to complete the work, or any portion thereof from other sources and charge the cost thereof to the Trade Contractor.

---

**ARTICLE 3**

**THE CONTRACT SUM**

3.1 JJC agrees to pay the Trade Contractor for the satisfactory performance of his work the total sum of:

Contract Amount: \$ .00

Contract amount is made up of the following:

- Base Bid .....\$
- Alternate Bid No. ....\$
- Total Contract Amount.....\$

Allowances (if applicable):

Unit Prices (furnished and installed unless stated otherwise)

**In current funds subject to additions and deductions for changes, as may be agreed upon, and to make payments on account thereof as follows:**

- 3.2 On the established day of each month, the Trade Contractor shall deliver to the JJC Construction Manager (2) completed copies of the JJC Payment Application Package showing values of all materials delivered and work completed up to the established billing date for which payment is being requested. It is specifically understood and agreed that prior to submission of the first statement the Trade Contractor will deliver to the JJC Construction Manager, for review and approval, a detailed breakdown of this contract sum showing a schedule of values for the various parts of the work. Once accepted, this schedule of values will be used as a basis for checking the Trade Contractor's monthly statement.
- 3.3 The Trade Contractor shall, with the second and each succeeding monthly request for payment, submit a waiver of lien showing all payments made for labor and materials and on account for all work covered in the previous months request for payment. Affidavit and waiver of liens may be required to be submitted from Trade Contractors, suppliers, and/or Trade-Trade Contractors (all tier).
- 3.3.1 The Trade Contractor shall, with the second and each succeeding monthly request for payment, submit certified payroll for all labor and sub labor.
- 3.4 Ten percent (10%) of each payment shall be retained, unless specific provisions to the contrary are indicated in the contract documents.
- 3.5 No payment made under this Agreement, including the final payment, shall be conclusive evidence of the performance of the work, either wholly or in part, and no payment shall be construed as an acceptance of defective work or improper materials.
- 3.6 The Trade Contractor shall save and keep JJC's property free from all mechanics' and material liens and all other liens and claims, legal or equitable, arising out of the Trade Contractors work hereunder. In the event any such lien or claim is filed by anyone claiming by, through, or under the Trade Contractor, the Trade Contractor shall remove and discharge same, by bonding or otherwise, within five (5) days of the filing thereof.

---

**ARTICLE 4**

**THE CONTRACT DOCUMENTS**

- 4.1 The contract documents consist of this Agreement and any exhibits attached hereto; general conditions, supplementary, special and other conditions, the drawings, specifications, general instructions to bidders, supplements to bidder's documents, form of proposal, all addenda issued prior to and all modifications issued after execution of the Agreement. Any post bid review and/or pre-construction document shall be considered part of this Agreement.
- 4.2 The Trade Contractor agrees to perform the work under the general direction of the JJC Construction Manager.
- 4.3 If there is a provision for liquidated damages in the contract documents, the Trade Contractor shall be liable for any liquidated damages by reason of the failure of the Trade Contractor to prosecute the work diligently and properly.
- 4.4 No extra work shall be performed under this Agreement, except upon receipt of a written change



order from JJC. Should the Trade Contractor proceed with any work they consider extra to this contract without a fully executed JJC change order form, it is considered at their own risk and cost.

---

## ARTICLE 5

### INSURANCE AND INDEMNITY

5.1 The Trade Contractor agrees to at the time of execution of this Agreement furnish the Construction Manager with certificates of an insurance company (or other source). These certificates should certify that the Trade Contractor is protected on the work with worker's compensation and employer's liability, public liability and bodily injury, property damage insurance, and any other insurance as required by the contract documents and in accordance with the attachment to this Agreement entitled "Insurance Specifications". The Trade Contractor will not be permitted to start work at the site until these certificates are filed with the JJC Construction Manager. Compliance by the Trade Contractor with the foregoing requirements, as to carrying insurance and furnishing certificates, shall not relieve the Trade Contractor of its liabilities and obligations.

---

## ARTICLE 6

### PERFORMANCE BOND AND LABOR AND MATERIAL PAYMENT BOND

6.1 The Trade Contractor agrees to furnish and pay for a 110% Performance Bond and a 110% Labor and Material Payment Bond. The bonds are to be delivered within 10 days of receipt of a purchase order and execution of this agreement.

---

## ARTICLE 7

### WARRANTY

7.1 The Trade Contractor agrees to promptly make good, without cost to the JJC, any and all defects, due to faulty workmanship and/or materials, which may appear within the guarantee or warranty period so established in the contract documents. If no such period be stipulated in the contract documents, then such guarantee shall be for a period of one (1) year from date of completion and acceptance of the work by JJC. The Trade Contractor further agrees to provide any and all guarantees as required by the terms of the contract documents, as a condition precedent to final payment.

---

## ARTICLE 8

### CHANGES IN THE WORK

- A. 8.1 The Trade Contractor may be ordered in writing by JJC, without invalidating this Agreement, to make changes in the work within the general scope of this Agreement. These changes may consist of additions, deletions, or other revisions, the contract sum and the contract time being adjusted accordingly. The Trade Contractor, prior to the commencement of such changed or revised work, shall submit promptly to the JJC Construction Manager written copies of any claim for adjustment

to the contract sum and contract time for such revised work in a manner consistent with the contract documents. Any extra work done by the Contractor will be considered performed at no extra cost to JJC unless a written JJC change order form has been fully executed and signed by the Director of Business and Auxiliary Services. A contractor shall not be entitled to any compensation for extra work/material based on verbal conversations or email exchanges (the contractor is considered proceeding with extra work at their own risk without a fully executed JJC change order form). It is the contractor's responsibility to obtain a fully executed change order form from JJC. A change order or a combination of multiple change orders may not exceed 10% of the original contract without JJC seeking approval from the Board of Trustees.

8.2 Where changes in the work involve both additions and deletions, percentages for overhead and profit shall be applied to the net increase only of such values for labor and materials.

8.3 The amount to be paid by the Owner for changes in the work, as outlined in paragraph 8.1 above, shall be made on the basis of one of the following methods:

(a) by mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation and agreed upon by the JJC Construction Manager and the Trade Contractor, or

(b) by unit prices stated in the contract documents, or

(c) if no such unit prices are set forth and if the parties cannot agree upon a lump sum, then the actual net cost in money to the Trade Contractor of materials and labor (including insurance and applicable taxes) required, plus rental of plant equipment (other than small tools and small equipment) plus compensation for overhead and for profit as noted in Article 12, field overhead will not be considered as part of actual net cost, or

(d) by the method provided in subparagraph 8.4.

8.4 If none of the above methods set forth in clauses 8.3 (a), 8.3 (b), 8.3 (c) is agreed upon, the Trade Contractor, provided he receives a written order signed by JJC shall promptly proceed with the work involved. The cost of such work shall be determined by the JJC Construction Manager on the basis of reasonable expenditures and savings of those performing the work attributable to the change, including, in the case of an increase in the contract sum, a reasonable allowance for overhead and profit as set forth in the bid documents. In such case, and also under clauses 8.3 (c) and 8.3 (d) above, the Trade Contractor shall keep and present, in such form as the JJC Construction Manager may prescribe, an itemized accounting together with appropriate supporting data for inclusion in a change order. Unless otherwise provided in the contract documents, cost shall be limited to the following: cost of materials including sales tax and cost of delivery, cost of labor including social security, old age and unemployment insurance and fringe benefits required by Agreement or custom; workers or workmen's compensation insurance; bond premiums; rental value of equipment and machinery; and the additional costs of supervision and field office personnel directly attributable to the change. Pending final determination of cost, payments, on account shall be made as determined by the JJC. The amount of credit to be allowed by the Trade Contractor for any deletion or change which results in a net decrease in the contract sum will be the amount of the actual net cost as confirmed by JJC when both additions and credits covering related work or substitutions are involved in any one change, the allowance for overhead and profit shall be figured on the basis of the net increase, if any with respect to that

change.

8.5 For work performed by a Trade-Trade Contractor, the Trade Contractor will be allowed to add 5% only and said Trade-Trade Contractor mark-up shall not exceed the agreed upon percentages noted in Article 11 for overhead and profit.

---

## ARTICLE 9

### TRADE CONTRACTOR RESPONSIBILITIES

9.1 The Trade Contractor shall provide sufficient, safe, and proper facilities at all times for the inspection of the work by JJC. The Trade Contractor shall, within a 24-hour notice from the JJC Construction Manager, proceed to take down all portions of the work and remove from the grounds or buildings, all materials, whether worked or unworked, which the JJC Construction Manager shall condemn as unsound or improper, or as in any way failing to conform to the contract documents. The Trade Contractor shall make good at its own expense, all work damaged or destroyed thereby.

9.2 The Trade Contractor agrees, in the performance of this Agreement, to comply with all federal, state, municipal, and local laws, ordinances, codes and governing regulations, to pay all costs and expenses required thereby; to pay all fees, charges, assessments, and taxes, including sales and use taxes, and to pay all fringe and other benefits required by Agreement or law.

9.3 The Trade Contractor shall pay all royalties and license fees. He shall defend all suits or claims for infringement of any patent rights and shall save JJC harmless from loss on account thereof, except that JJC shall be responsible for all such loss when a particular design, process or the product of a particular manufacturer or manufacturers is specified, but if the Trade Contractor has reason to believe that the design, process or product specified is an infringement of a patent, he shall be responsible for such loss unless he promptly gives such information to the JJC Construction Manager.

9.4 Should the Trade Contractor become insolvent, or at any time, refuse or neglect to supply a sufficiency of properly skilled workers, or equipment and materials of the proper quality, or fail in any respect to prosecute the work with promptness and diligence, or fail in the performance of any of the Agreements herein contained, JJC shall be at liberty, after 48 hours written notice to the Trade Contractor, to provide any such labor, equipment, and materials and deduct the cost thereof, from any money then due or thereafter to become due to the Trade Contractor, under this Agreement if such refusal, neglect, or failure is sufficient ground for such actions, JJC shall also be at liberty to terminate the employment of the Trade Contractor. Consequently, JJC may enter upon the premises to take possession, for the purpose of completing the work included under this Agreement, of all materials, tools, and appliances thereon, and to employ any other person or persons to finish the work and provide the materials therefore. In case of such discontinuance of the employment, the Trade Contractor shall not be entitled to receive any further payment under this Agreement until the said work shall be wholly finished. If such expense shall exceed such unpaid balance, the Trade Contractor shall pay the difference to JJC. The expense incurred by JJC, as herein provided, either for furnishing materials, or finishing the work, and any damage incurred through such default, shall be chargeable to the Trade Contractor. In the event that a Termination for Cause is not upheld by a properly empowered judicial or arbitral authority, then the Termination for Cause shall be deemed a Termination for Convenience and construed under Section 9.4.1. hereof.

9.4.1 Notwithstanding the above paragraph, JJC reserves the right to terminate this Agreement for its convenience upon written notice to the Trade Contractor. In such instance the Trade Contractor will be paid

its share of the contract amount proportionate to the percentage of its work completed and other reasonable cancellation costs incurred as a result of said termination. No payments shall be made for anticipated overhead and profit. Prior to making any payments under this clause, JJC shall have the right to audit the records of the Trade Contractor.

9.5 The Trade Contractor agrees to adhere to the federal occupational safety act, state and local safety regulations and JJC's safety and health program so as to avoid injury or damage to persons or property, and to be directly responsible for damage to persons and property resulting from failure to do so.

9.6 In the event the Trade Contractor after a 24-hour written notice from JJC fails to take corrective action to insure compliance with said safety regulations or removal of rubbish and debris resulting from his work, JJC shall undertake these obligations and charge the cost of same to the Trade Contractor's account without further notice to the Trade Contractor.

9.7 The Trade Contractor agrees to notify the JJC Construction Manager of all accidents which may occur to persons or property and shall provide a copy of all accident reports on appropriate forms. All reports shall be signed by the Trade Contractor or his authorized representative and submitted within five (5) days of occurrence.

9.8 The Trade Contractor shall procure its materials from such sources, and employ such labor subject to contract terms and conditions in order to ensure harmonious labor relations on the site and prevent strikes or labor disputes by its employees or other trade employees. The Trade Contractor, in the event of a labor dispute including strikes, shall take whatever action is required in order to prevent the disruption of work on the Project site.

9.9 The Trade Contractor will not assign this Agreement or any moneys due or to become due under this Agreement, or sublet the whole or any part of the work to be performed hereunder, without the written consent of the Owner. In the event of such consent, a Trade-Trade Contractor must comply with all the requirements of this Agreement.

9.10 The Trade Contractor agrees that all disputes concerning the jurisdiction of trades shall be adjusted in accordance with any plan for the settlement of jurisdictional disputes which may be in effect either nationally or in the locality in which the work is being done. The Trade Contractor shall be bound by, and shall abide by, all such adjustments and settlements of jurisdictional disputes, whether or not the Trade Contractor is signature bound by the Agreement establishing the impartial jurisdictional disputes board and/or its successors. The Trade Contractor agrees not to cause work stoppage, due to the jurisdictional assignment of work.

9.11 The Trade Contractor shall submit to the JJC Construction Manager upon request, copies of orders placed for the various materials required for the Project or authentic stock lists if such material is normally a stock item. Order copies need not reflect prices but should indicate type of material, quantity, vendor name, and address, etc. The Trade Contractor shall be required to submit to the JJC Construction Manager a monthly material status report, or more often if required by the JJC Construction Manager, as a prerequisite for the monthly progress payment. The Trade Contractor shall notify the JJC Construction Manager immediately upon learning of a change of status of any material, equipment, or supplies.

9.12 The Trade Contractor shall continuously and adequately protect all his work and will immediately replace all damaged and defective work.

9.13 The Trade Contractor agrees to maintain an adequate force of experienced workers and the necessary materials, supplies, and equipment to meet the requirements of the JJC Construction Manager and other trades in order to maintain construction progress schedules, as established by the JJC Construction Manager. In the event that his force is, in the judgment of the JJC Construction Manager, inadequate to meet the established schedules during the regular working hours, the Trade Contractor agrees to work sufficient overtime hours or increase his work force to meet such schedules at no extra cost to JJC. If for reasons not already stated, the JJC Construction Manager requires and directs the Trade Contractor to work overtime, including Saturdays, Sundays or Holidays, the Trade Contractor will be reimbursed the net premium rate only. The net premium rate is understood to mean the actual premium labor cost, including applicable taxes and wage additives required by trade Agreement or by law, but without additives for overhead, labor efficiency, or profit.

9.14 The Trade Contractor agrees to employ competent administrative, supervisory, and field personnel to accomplish the work, including layout, engineering, and preparation and checking of shop drawings. If required, the Trade Contractor shall substantiate this employment of competent personnel to JJC's Construction Manager's satisfaction before initiating any work.

9.15 The Trade Contractor shall insure that all construction tools, equipment, temporary facilities, and other items used in accomplishing the work, whether purchased, rented, or otherwise provided by the Trade Contractor or provided by others, are in a safe, sound, and good condition, must be capable of performing the functions for which they are intended and must be maintained in conformance with applicable laws and regulations.

9.16 If the Trade Contractor is delayed at any time in the progress of the work by any act or neglect of JJC, the Architect/Engineer, or by any employee of either, or by any separate contractor employed by JJC, or by changes ordered in the work, or by labor disputes, fire, unusual delay in transportation, adverse weather conditions not reasonably anticipatable, unavoidable casualties or any causes beyond the Trade Contractor's control, or by delay authorized by JJC, or by any other cause which the JJC Construction Manager determines may justify the delay, then the contract time shall be extended by amendment for such reasonable time as the JJC Construction Manager may determine. In the event that a conflict exists between this section (9.16) and a like clause contained in a document having higher precedence, such like clause shall have preference to the extent of the conflict.

9.17 Right-To-Know- each Trade Contractor is required to implement the provisions of the right-to-know law, if any, as enacted by the state in which the work is being performed. Before using on site any material listed in the right-to-know substance list, each Trade Contractor will furnish the Construction Manager a copy of the material safety data sheet for that substance.

9.18 In the event the Trade Contractor employs independent contractors, as well as payroll labor, to discharge its obligations hereunder, the Trade Contractor acknowledges and understands that it does so at its own risk and that federal, state and/or local agencies may dispute the independent contractor status and assess penalties, fines, and costs should there be a determination to reclassify such workers. In that event, the Trade Contractor agrees that it will defend, indemnify and hold JJC harmless from any fines, costs, damages, penalties, attorneys fees, and causes of action, including without limitation, personal injury or property damage, arising out of or relating in any way to such a determination.

9.19 The Trade Contractor will have competent supervision on site at all times when work is proceeding. No subcontractor should be working on site without representation/supervision by this Trade Contractor. The JJC Construction Manager reserves the right to hire proper supervision of subcontractors, and fully back charge

this Trade Contractor for such services.

---

## ARTICLE 10

### EQUAL OPPORTUNITY

10.1 During the performance of this Agreement, the Trade Contractor agrees not to discriminate against any employee or applicant for employment because of race, color, religion, sex, or national origin. The Trade Contractor will take affirmative action to insure that applicants are employed without regard to their race, color, religion, sex, or national origin. The Trade Contractor will comply with all provisions of Executive Order No. 11246, Section 503 of the Rehabilitation Act of 1973, as Amended, the Vietnam Era Veterans' Readjustment Assistance Act of 1974, as Amended, (38 U.S.C. 4212) and their implementing regulations at 41 CFR Chapter 60.

---

## ARTICLE 11

### ALTERATIONS

11.1 The overhead and profit allowable under Article 8.3. A, 8.3 B, 8.3 C is:

- For the Trade Contractor, for any Work performed by the Trade Contractor's own forces- 12 percent of the cost
- For the Trade Contractor, for Work performed by his Subcontractor - 5 percent of the amount due the Subcontractor

11.2 All proposals, except those less than \$200 shall be accompanied by a complete itemization of costs including, labor, materials and subcontractors. Labor and material shall be itemized in the manner prescribed in Article 11.1. Where major cost items are subcontracts, they shall be itemized also. In no case will a change involving over \$200 be approved without such itemization.

---

## ARTICLE 12

### COMPLETE AGREEMENT

12.1 This Agreement, together with all documents, specifications, drawings, incorporated herein by reference, constitutes the entire Agreement between JJC and Trade Contractor. There are no terms, conditions, or provisions, either oral or written, between the parties hereto, other than those contained herein. This Agreement supersedes any and all written representations, inducements, or understandings of any kind or nature between the parties hereto, relating to the particular Project involved herein.

12.2 The said parties for themselves, their heirs, successors, executors, administrators and assigns, do hereby agree to the full performance of the covenants herein contained.

12.3 Governing Law; Venue - The validity, construction and interpretation of this Agreement shall be governed by the laws of the State of Illinois. The parties hereto irrevocably agree that all actions or proceedings in any way, manner or respect arising out of or from or related to his Agreement shall be litigated only in the Circuit Court, Twelfth Judicial Circuit, Will County, Illinois. Each party hereby consents and submits to personal jurisdiction in the State of Illinois and waives any rights such party may have to transfer the venue of any such action or proceeding.

In witness whereof they have hereunder set their hands the day and date first above written.  
In the presence of

Trade Contractor

Accepted by: \_\_\_\_\_ (Signature)

Name: \_\_\_\_\_ (Print name)

Title: \_\_\_\_\_

Date: \_\_\_\_\_

Joliet Junior College  
Owner

By: \_\_\_\_\_ (Signature)

Joliet Junior College


Name: \_\_\_\_\_ (Print name)

Title: \_\_\_\_\_

Date: \_\_\_\_\_

\_\_\_\_\_  
Witness

\_\_\_\_\_  
Witness

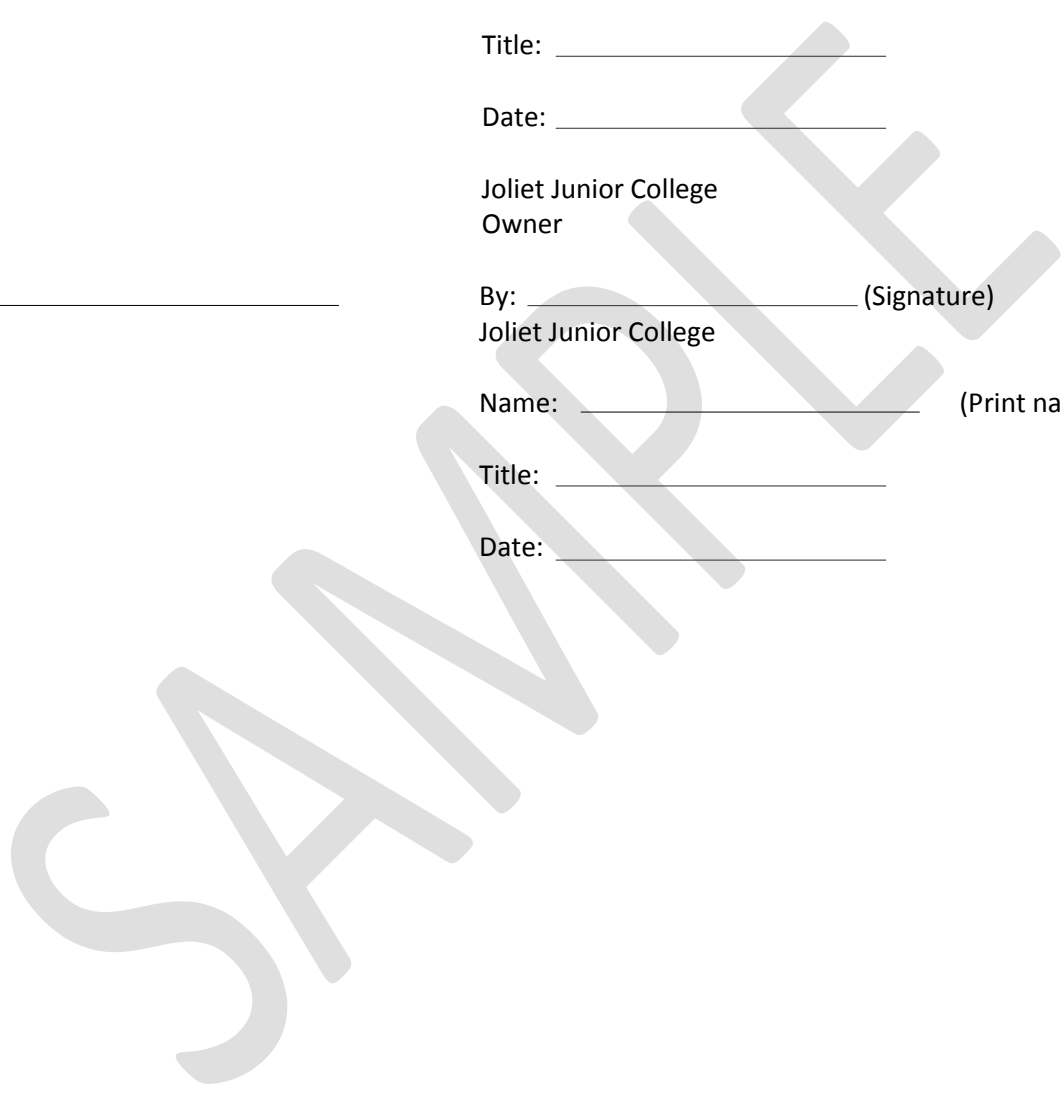

Date:  
Time:  
Project Title / Location:  
Project Number:

FOR

1. **Introductions:** All project members are to introduce themselves including their name, organization, title, and role on the project.

A. Joliet Junior College Personnel:

1. Construction Manager:

- a. Phone:
- b. Cell:
- c. Email:

2. Alternate Contact:

- a. Phone:
- b. Cell:
- c. Email:

B. Contractor Personnel

1. Project Manager:

- a. Phone:
- b. Cell:
- c. Email

2. Construction Superintendent:

- a. Phone:
- b. Cell:
- c. Email:

2. **Communications:**

- A. Communications related to the project between Joliet Junior College and the Contractor shall be conducted through the Joliet Junior College Construction Manager (CM) only, unless directed otherwise.
- B. In the event of an emergency the Contractor is to contact Campus Police at 815-280-2234, or may pick-up any campus phone and dial 2911.
- C. RFI's: Requests for Information (RFI's): All Requests for Information shall be in written form to JJC's CM with a copy to the A/E when required. All responses will come from JJC or the A/E in writing addressed to the Contractor's Project Manager



## Preconstruction Conference Checklist

Revision-F June 20, 2018

- D. Weekly Construction Reports: Contractor is to provide a weekly construction report to JJC CM. This report is to be inclusive of daily activities, potential delays, stoppage, problems, accidents, near misses, significant decisions, meetings, requests by JJC, etc.
- E. Correspondence: All correspondence shall be directed to the Construction Manager

Joliet Junior College  
Facilities Services Department  
ATTN: \_\_\_\_\_  
1215 Houbolt Road  
Joliet, IL 60431

Include Project Title, Project Number, Purchase Order Number on ALL correspondence.

### 3. Construction Schedule:

- A. Schedule of Values: Contractor is to provide a schedule of values (AIA document recommended) broken down into each division of the work as a minimum. The schedule of values will include as a minimum a listing of the work elements or branch values, the cost of each work element, and the percentage of total project "award" cost that the work element represents. The schedule of values will become the basis for "work elements" a.k.a. "branch values" of the Construction Schedule. These same "work elements" shall be used as the basis for the "branch values" of the Construction Progress Report as listed in item #2D above.
- B. Construction Schedule: Contractor is to submit within one week of pre-construction meeting, a fully developed gantt chart type construction schedule.
  - 1. Provide a task for each construction activity or "work element".
  - 2. No progress payment will be processed until the construction schedule is submitted and approved.
  - 3. Provide a revised, updated schedule with each progress payment request.

## Preconstruction Conference Checklist

Revision-F June 20, 2018

### Performance:

#### A. Commencement, Prosecution & Completion of Work

1. Purchase order/notice to proceed received: \_\_\_\_\_
2. Contract Amount: \_\_\_\_\_
3. Total Amount of Alternates Accepted: \_\_\_\_\_
4. Proposed start/mobilization date : \_\_\_\_\_
5. Preconstruction Submittals Received: Check one Y \_\_\_\_\_ N \_\_\_\_\_
6. Bonding & Insurance Requirements Received: Check one Y \_\_\_\_\_ N \_\_\_\_\_
7. Completion date: \_\_\_\_\_
8. Delays and time extensions: The Contractor is responsible for the completion of project work within the time designated above and in the construction schedule. Justified change orders may qualify a delay and require a time extension which must be discussed and approved by the JJC CM. Failure to complete the project on time will result in a negative evaluation of Contractor performance on the JJC project close-out documents.
9. All shop drawings will be submitted to the JJC CM or A/E when required. Material samples shall be submitted for approval when required.
10. The JJC CM and/or the A/E will provide a list of punch list items. The final punch list shall be completed within 2 weeks upon substantial completion. 10% of the contract amount will be withheld until all punch list items are completed.
11. Construction status meetings between the Contractor and JJC CM shall be held on a weekly basis in the JJC CM's office. At the JJC CM's discretion, this weekly meeting may be held via conference telephone call as the project dictates.
12. As-built drawings shall be maintained and kept on-site daily. Final as-built drawings are required to be turned over to the JJC CM at project completion. When AutoCAD drawings are available from the A/E, the Contractor will revise the drawings to reflect as-built conditions. Final payment will not be processed until all as-built drawings are received.

#### B. Coordination of Work:

1. The Contractor is responsible for coordination of all elements of the work and every aspect of the coordination of his subcontractors work.
2. The Contractor is required to have a competent construction supervisor in charge of the work at all times. Construction supervisor may be a working foreman. It is required that the contractor have their own supervisor on site anytime they have a subcontractor on site.
3. When the shut down of utilities is required, the Contractor shall coordinate with the JJC CM to schedule the shut down process. Allow a minimum of 5 days notice

## Preconstruction Conference Checklist

Revision-F June 20, 2018

to allow for a shut down. Unless otherwise stated during the bidding process, a utility shut down will be required between the hours of 10:00 p.m. to 6:00 a.m.

4. The contractor is to consider any loud construction noise that may be disruptive to classes, faculty, students and staff (including but not limited to loud demolition, hammer drilling, concrete cutting/drilling, rock breaking, shooting of metal stud track into floors and ceilings, etc.). Such work shall be performed during the maintenance hours of 10:00 p.m. to 6:00 a.m.
  5. The contractor will be responsible for providing and maintaining portable toilet facilities when the scope of work is an outdoor project. Location of the portable toilet(s) shall be coordinated with JJC.
  6. Any project requiring excavation with remaining spoils shall be hauled off site as part of the contractor's base scope of work. Leaving/spreading spoils on site shall not be permitted.
- C. Contractor Evaluation:
- At the completion of the project, the JJC CM will complete a contractor evaluation. This evaluation is kept on file and is taken into consideration when considering the Contractor for future projects.

**13. Mobilization:** Prior to the Contractor mobilizing on site, the following requirements must be met and reviewed.

- A. Pre-mobilization requirements:
1. Safety plan submitted and approved. Safety plan should address issues of excavation, crane lifts, hot work and other construction hazards that may apply to their work.
  2. Schedule of Values and Construction Schedule submitted and approved.
  3. Review Contractor's plan for mobilizing on site, including phasing, timing elements, crane operations, dumpster locations, gang box locations, deliveries, parking, storage of material, etc.
  4. Contractor check-in with Facility Services. The Contractor's employees are required to obtain vehicle tags and I.D. badges. Any ticketing by Campus Police as a result of no vehicle tag will be the responsibility of the Contractor.

## Preconstruction Conference Checklist

Revision-F June 20, 2018

**14. Maintenance, Housekeeping and Clean-up:** The Contractor is primarily responsible for housekeeping in its respective work areas, and for work performed by its employees and subcontractors. This means the Contractor's work area is required to be maintained in an orderly, safe and productive condition at all times.

- A. Accumulation of combustibles, flammable liquids, chemical products, tools not in use, trash and/or refuse is not acceptable and will not be allowed.
- B. Parking, staging and storage of materials and equipment shall be confined to designated areas only.
- C. When a Contractor's work material may be dislodged by wind and could create a hazard when left in an open area, it shall be secured by the Contractor.
- D. The Contractor will police its work area(s) at the end of the shift and leave the area in a condition that is acceptable to the JJC CM.
- E. In the event that housekeeping in a Contractor's work area is found to be in an unacceptable condition by the JJC CM, the CM will give notice once verbally to the Contractor's on-site supervisor or foreman. If the deficiency is not corrected in a timely manner (and no later than the end of the day's work shift), the JJC Facility Services Department may make provisions for clean-up (which may or may not be done by outside services), and fully back charged to the Contractor. The Contractor will be liable for all costs associated with clean-up at a minimum rate of \$125/man hour plus materials.
- F. The Contractor shall provide and install safety fencing or barricades around areas requiring protecting (including but not limited to trees, plantings, etc.). This includes installing cyclone fencing for outdoor projects to prevent anyone from entering the construction zone.
- G. The Contractor will be responsible for daily cleaning of mud off roadways where required, or caused by this Contractor.
- H. The Contractor will provide tree protection and install silt fencing when working in areas that such protection or erosion control is required.
- I. The Contractor will provide berms around storm drains to prevent mud run-off from entering the lake.

## Preconstruction Conference Checklist

Revision-F June 20, 2018

- J. The contractor shall provide floor protection where necessary when the potential of damage to flooring may occur as a result of this contractors work. Contractor is to determine the necessary means, material and extent of floor protection required. Contractor should also photograph and document existing floor conditions prior to any work.
- K. Any landscape/lawn areas disturbed or damaged (inclusive of ruts, damaged trees, bushes, grass/turf, etc) as a result of this contractors work shall be repaired and/or replaced to original condition. Contractor shall take necessary means to protect such areas whenever possible.
- L. Where necessary, this contractor shall provide dust protection in all areas that may be impacted by their work. Means and methods of dust protection is to be determined by this contractor. Contractor will be fully responsible for cleaning all dust in any and all areas impacted by this project.

### 15. Conduct and Behavior:

The Contractor's employees and representatives must take into consideration the environment around them when holding conversations with fellow associates as well as JJC staff as to not interrupt classes that may be in session, or students in concourses that may be studying. Profanity/foul language, derogatory remarks or harassment of faculty, staff and/or students will not be tolerated and will be an immediate means for the employee dismissal from the project by JJC.

### 16. Progress Payments/Invoicing and Change Orders:

- A. A "pencil" copy of progress invoicing shall be submitted to the JJC CM & the A/E by the 1st of every month for review and approval. Final invoicing shall be in by the second week of the month for processing and board approval. No invoice will be processed without lien waiver(s) and certified payroll.
- B. Any extra work done by the Contractor will be considered performed at no extra cost to JJC unless a written JJC change order form has been fully executed and signed by the Director of Business and Auxiliary Services. A contractor shall not be entitled to any compensation for extra work/material based on verbal conversations (the contractor is considered proceeding with extra work at their own risk without a fully executed JJC change order form). It is the contractor's responsibility to obtain a fully executed change order form from JJC. A change order, or a combination of multiple change orders may not exceed 10% of the original contract without JJC seeking approval from the Board of Trustees.

### Preconstruction Conference Checklist

Revision-F June 20, 2018

#### 17. Miscellaneous:

- A. Soliciting or canvassing and posting or distributing printed material (except as permitted by law) is prohibited.
- B. Smoking and chewing tobacco is strictly prohibited on JJC property.
- C. Drinking, using, possessing or being under the influence of alcohol or controlled substances are prohibited, and a cause for immediate dismissal.
- D. No radios, CD Players or MP3 players shall be used during normal working hours.
- E. The Contractor shall perform his/her work in accordance to no less than the minimum requirements as established by the Occupational Safety and Health Association. Personal Protection equipment shall be provided by the Contractor and worn at all times.
- F. The Contractor will be responsible for securing materials and tools and shall be solely responsible for any such theft or damage.

By signing below, the Contractor certifies that he, his employees, subcontractors, or assigns will abide to this Preconstruction Conference Checklist during the course of the project. This document shall be attached and included as part of the contract for this project.

Contractor: \_\_\_\_\_  
Print name: \_\_\_\_\_  
Sign name: \_\_\_\_\_  
Title: \_\_\_\_\_  
Date signed: \_\_\_\_\_

JJC CM: \_\_\_\_\_  
Sign name: \_\_\_\_\_  
Date signed: \_\_\_\_\_

August 2008

# **Safety Requirements for Contractors and Subcontractors**

Environmental Health and Safety

Facility Service Department

(815) 280-2384

Environmental Health and Safety

---

# **Safety Requirements for Contractors And Subcontractors**

Environmental Health and Safety

Facility Services Department

1215 Houbolt Rd.

Joliet, IL 60431

Phone: (815) 280-2384 Fax (815) 280-6673

[http: // www.jjc.edu/ehs](http://www.jjc.edu/ehs)



## Table of Contents

<b>INTRODUCTION</b> .....	<b>1</b>
EHS Information .....	1
Purpose .....	1
Application .....	1
Scope.....	1
<b>GENERAL REQUIREMENTS</b> .....	<b>2</b>
Contractual Obligations .....	2
Submittals .....	2
Control of Fugitive Emissions.....	3
Accidental Spills and Releases .....	3
Emergency Phone Numbers .....	3
<b>SPECIFIC PROGRAM REQUIREMENTS</b> .....	<b>5</b>
<b>Non Capital Projects</b> .....	<b>5</b>
Asbestos and Suspect Asbestos Containing Building Materials .....	6
Lead-containing Building Materials .....	6
Confined Spaces.....	7
Hazard Communication .....	7
Electrical Safety and Lockout/Tagout .....	9
Trenching and Excavations .....	9
Hot Work.....	10
<b>Capital Projects</b> .....	<b>10</b>
Asbestos and Suspect Asbestos Containing Building Materials .....	10
Lead-containing Building Materials .....	10
Confined Spaces.....	10
Hazard Communication .....	11
Electrical Safety and Lockout/Tagout .....	12
Trenching and Excavations .....	13
Hot Work.....	13
<b>Agencies/Firms With No Contractual Relationship WITH JJC</b> .....	<b>13</b>
<b>WORK SITE INSPECTIONS</b> .....	<b>14</b>
Non-Capital Projects .....	14
Capital Projects .....	14
Agencies/Firms Where No Formal Contractual Relationship Exists .....	15
<b>DEFINITIONS</b> .....	<b>16</b>

*This page left intentionally blank.*

# Introduction

## EHS Information

The mission of Environmental Health and Safety (EHS) is to:

- Work toward providing a safe and healthful living, learning, and working environment for every member of the greater college community by assuring safe work practices through educating, training, and assisting individuals and departments;
- Help individuals and departments achieve compliance with all health and safety state and federal regulations and college policies as economically as possible and
- Act as liaison with external regulatory agencies, and to monitor college compliance with mandatory health and safety standards whenever necessary.

## Purpose

Joliet Junior College developed *Safety Requirements for Contractors and Subcontractors* to assure the safety of college employees and the public who may be in proximity to renovation, demolition, installation, or maintenance operations performed by Contractors or Subcontractors. Every Contractor is expected to take steps as necessary to protect the safety and health of college employees, students, and visitors during the performance of their work. Each Contractor that coordinates the work of Subcontractors shall assure that they abide by the requirements outlined herein.

## Application

Each department that coordinates or uses the services of a Contractor to perform maintenance, repair, installation, renovation or construction-related operations is expected to designate one or more persons to coordinate this program within his or her department. These coordinators are expected to assure that the Contractor is:

- Informed of the presence of hazards in or near the work area.
- Informed about JJC's requirements related to lead, confined space entry, lockout/tagout, hot work, and excavation operations.
- Aware of the colleges' expectations regarding safety compliance and the control of worksite hazards.

A representative from EHS will serve as the coordinator for the purposes of this program on capital renovation and construction projects.

## Scope

This program applies to all JJC properties, and to all work performed by Contractors and Subcontractors in or on property owned, leased or occupied by JJC or employees of JJC.

# General Requirements

## Contractual Obligations

A copy of this document shall be made available upon request to prospective bidders/offerors at the pre-bid/pre-proposal conference for the work. This document shall be either included with, or referenced in, the contract documents.

Contractors performing building, facilities or equipment-related construction, repair, installation, renovation or maintenance activities shall attend a safety orientation as follows:

- On capital projects, this orientation will be conducted during the pre-construction conference or as determined by the Project Manager.
- For non-capital construction/renovation work, the Project Coordinator shall arrange the safety orientation with EHS and the Contractor prior to the start of work by contacting EHS at (815) 280-2384. Contractors retained on a term contract need only attend one safety orientation held prior to the award of the first project under that contract.

The Contractor shall provide the Project Manager/Coordinator with emergency contact phone number(s), usable 24 hours a day, for the Contractor's representative. These phone numbers shall be copied to EHS and the JJC Police Department prior to the work.

The Contractor bears sole responsibility for the safety of his or her employees. The Contractor is expected to take all steps necessary to establish, administer, and enforce safety rules that meet the regulatory requirements of the Illinois Department of Labor (IDOL) and the Occupational Safety and Health Administration (OSHA). These regulations include, but are not limited to:

- Title 29 of the Code of Federal Regulations (CFR) Parts 1910, Occupational Safety and Health Administration (OSHA) Standards for General Industry,
- Title 29 of the Code of Federal Regulations (CFR) Parts 1926, Occupational Safety and Health Administration (OSHA) Standards for the Construction Industry.

The Contractor bears sole responsibility for communication of safety-related information and requirements to his or her Subcontractors. Contractors shall assure that their Subcontractors comply with the requirements outlined herein.

## Submittals

Submittals, where required from the Contractor by this document, shall be made in writing, directly to the Project Manager/Coordinator and copied to EHS. Submittals shall be made sufficiently in advance to avoid delay of the project. Where review, approval, or coordination of submittals is required, submittals shall be made at least ten (10) working days prior to the start of the project unless prior arrangements have been made. Post-job submittals, where required

as outlined in this document, shall be made no later than fifteen (15) working days after completion of the project or as specified herein.

## Control of Fugitive Emissions

The Contractor shall take all reasonable precautions necessary to control fugitive emissions from the job site. Fugitive emissions include, but are not limited to: nuisance dust, chemical odors/vapors/gases, hazardous materials (such as lead dust or asbestos), and noise.

Where the product(s) or material(s) to be used by the Contractor has a permissible exposure limit (PEL) established by OSHA or IDOL and where college employees or the public may be exposed to the product or material, the Contractor shall take all reasonable steps to maintain exposures below the PEL where an exposure condition during use exceeding the PEL could reasonably be anticipated. In such instances, the Contractor shall monitor, or shall contract to have monitored, work area exposure conditions. Monitoring shall occur, at a minimum, during the start of work and whenever there is a change in procedure, process, or chemical or material used. If it is deemed not practicable to maintain exposures below the PEL, the Contractor shall restrict access to all areas where exposures exceed the PEL to authorize personnel only.

## Accidental Spills and Releases

In the event of an accidental release or spill of chemicals or other hazardous materials the Contractor shall:

- Immediately take action as appropriate to contain the spill if this action can be taken without jeopardizing the health or safety of employees,
- Notify the fire department, campus police, or other entities as needed or required,
- Contact EHS, and
- Contact the Project Manager/Coordinator.

EHS emergency response personnel may be reached after normal business hours by contacting the Campus Police Department at (815) 280-2234 or 2811 from a house phone.

The following phone numbers may be used in the event of an emergency during normal working hours:

	Outside	On-Campus
Joliet Fire Department and Ambulance		911
JJC Campus Police	(815) 280-2911	Extension 2911
North Campus-Romeoville Fire/Ambulance	911	911
Morris Fire/Ambulance	911	911
Environmental, Health and Safety	(815) 280-2384	Extension 2384
East Joliet Fire/Ambulance	(815) 723-1504	911
Facility Services	(815) 280-2332	Extension 2332

All college costs associated with responding to or remediation of a chemical or hazardous material spill or release may be assessed by the Contractor.

## **General Work Requirements**

The Contractor shall abide by the requirements of any sign posted in a building that requires the use of specific personal protective equipment, that restricts access to qualified or authorized persons only, or that establishes other requirements for entry.

The Contractor shall not conduct work or operations that obstruct exits or the means of egress from an occupied building without the prior approval of EHS and the Project Manager/Coordinator. Equipment and materials are not to be stored in exits or exit stairwells at any time, and may not be stored in the means of egress without prior approval. Fire rated doors shall not be chocked or blocked open except temporarily and event of a building fire alarm or similar emergency.

Compressed gases shall be stored, used and transported in accordance of the NFPA, OSHA and DOT. New compressed gas installations shall comply with these agency requirements.

All tents, stages and temporary structures shall comply with the requirements of the NFPA.

Contractors shall not use College equipment or vehicles nor shall the Contractor allow college employees to use the Contractors' equipment or vehicles without the approval of Risk Management and EHS. If an employee of a Contractor needs to use specialized equipment owned by JJC, such as powered industrial trucks, the Contractor must provide suitable documentation that the employee has been trained and certified (if required) to use such equipment.

# Specific Program Requirements

## Non-capital Projects

### Asbestos and Suspect Asbestos Containing Building Materials

It is the responsibility of the Contractor to provide his or her own asbestos awareness program which shall include, but is not limited to, the information contained in this section and the OSHA asbestos-related regulations (29 CFR 1926.1101). Verification that this training has been conducted shall be supplied to the college upon request.

Contractors employed by the college to perform building or facilities-related maintenance, repair or renovation shall be informed by the Project Coordinator of the location of suspect and known asbestos-containing materials (ACM) in the work area(s) to which they are assigned by one of the following means:

- The Project Coordinator shall provide the Contractor with a copy of a completed "Work Order Review Form" or an asbestos inspection report specific to their work and the materials that are to be distributed, or
- Where the construction documents for a project clearly detail asbestos material locations within the work area, these documents may serve in lieu of the "Work Order Review Form" or inspection report.

The "Work Order Review Form" is used internally at the College to document that the proposed scope of work has been reviewed for the presence of suspect or known ACM. The "Work Order Review Form" will be completed by either EHS or the individual within the Department approved by EHS to perform this review. Questions related to this issue should be addressed to EHS at (815) 280-2384. An asbestos inspection report may, at the discretion of the Contracting Department, be prepared by an asbestos consultant licensed in Illinois to perform the duties of Asbestos Inspector and Asbestos Management Planner, this report shall be copied to EHS upon receipt.

Contractors shall, under no circumstances, damage or disturb suspect or known *friable* ACM unless they are a licensed Illinois Asbestos Abatement Contractor and have been specifically employed to perform asbestos repair or removal. Contractors may remove *non-friable* ACM, or perform work that will potentially disturb non-friable ACM, only with prior approval by EHS of the Contractors proposed work methods, employee training and waste disposal site. If suspect asbestos materials are discovered during the course of the work, the Contractor shall stop work immediately and notify the Project Coordinator or other person as indicated in the contract documents.

The Contractor shall not proceed with any change in work which requires a material to be disturbed that the "Work Order Review Form", asbestos inspection report, or construction documents show has not previously been tested (e.g., "suspect" ACM). If a change in the scope of work becomes necessary, the revised scope of work shall be reviewed and pre-approved by EHS or other authorized person.

Asbestos materials may not be used or installed in College facilities.

## Lead-Containing Building Materials

Contractors employed by the college to perform building or facilities-related maintenance, repair or renovation shall be informed by the Project Coordinator of the location of lead-containing building materials in the work area(s) to which they are assigned by one of the following means:

- The Project Coordinator shall provide the Contractor with a copy of the completed “Work Order Review Form” or a lead inspection report specific to their work and the materials that are to be disturbed, or
- Where the construction documents for a project clearly detail the location of lead-containing building materials within the work area, these documents may serve in lieu of the “Work Order Review Form” or inspection report.

The Project Coordinator may obtain information regarding the location of lead materials within a work site from the Department Safety Representative or by contacting EHS at (815) 280-2384. A lead inspection report may, at the discretion of the Contracting Department, be prepared by a lead consultant licensed in Illinois to perform the duties of Lead Inspector, this report shall be copied to EHS upon receipt. Contractors that will disturb lead-containing building materials during the course of work shall take all necessary precautions to protect college employees and the public from exposure to lead dust or contamination. These measures shall conform, at a minimum, to the OSHA requirements detailed in 29 CFR 1926.62 and applicable local, state and federal regulation. The Contractor shall submit a copy of his or her lead compliance program, as required by 29 CFR 1926.62(e), with required supporting documentation for prior review and approval to EHS. This submittal shall be made sufficiently in advance of construction to avoid delay of the project. Where the Contractor is engaged in work in child-occupied facilities (as defined by 40 CFR Part 745), such work shall be performed in accordance with 40 CFR Part 745, and clearance testing shall be performed by EHS or a licensed consultant at the conclusion of the project in accordance with the requirements of this regulation.

A copy of the analytical report(s) for any personal air samples taken during the course of the work shall be provided to EHS.

The Contractor shall not proceed with any change in work that requires a material be disturbed that the “Work Order Review Form”, lead inspection report, or construction documents shows has not previously been tested unless pre-approved work procedure will be followed.

On projects where lead-containing materials will be disturbed or removed during the course of work, the Project Designer shall contact EHS at (815) 280-2384 to determine disposal requirements. If the lead-containing materials will constitute a hazardous waste, disposal of these materials shall be coordinated with EHS. The disposal requirements must be established during the design of the project.



## Confined Spaces

When the College arranges to have a Contractor perform work that involves entry into a confined space, the Project Coordinator shall:

- Inform the Contractor that the workplace contains confined spaces and that the entry is allowed only through compliance with a confined space program meeting the requirements set forth by the DOL and the OSHA.
- Apprise the Contractor of the elements, including the hazard(s) identified and the college's experience with the space.
- Apprise the Contractor of any precautions or procedures that the college has implemented for the protection of college employees in or near confined spaces where contractor personnel will be working.
- Coordinate entry operations with the Contractor when both College personnel and contractor personnel will be working in or near confined spaces.
- Debrief the Contractor at the conclusion of the entry operations regarding the confined space program followed and any hazards confronted or created in confined spaces during entry operations
- Provide a copy of JJC Confined Space Entry Program to the Contractor upon request.

Information on JJC Confined Space Program and information on specific confined spaces on JJC Properties may be obtained by contacting EHS at (815) 280-2384.

Each Contractor who is retained to perform work that will require permit space entry operations shall:

- Coordinate entry operations with the Project Coordinator when both the Contractor and College personnel will be working in or near permit spaces;
- Inform the Project Coordinator in writing of the permit space program the Contractor will follow;
- Inform the Project Coordinator of any hazards confronted or created in permit spaces during entry operations;
- Provide a copy of the Contractor's Confined Space Program to the College upon request;
- Inform the Project Coordinator in writing of the rescue services/team they will be using during permit entry; and
- Provide a copy of the canceled permit(s) to the Project Coordinator and EHS at the conclusion of entry operation.

## Confined Spaces

The Contractor shall maintain, on-site, Material Safety Data Sheets (MSDS's) for all chemicals used or stored at his or her job site as required by IDOL/OSHA regulations and the contract documents. The Contractor shall provide copies of MSDS's to the Project Coordinator and EHS upon request.

Chemicals are used extensively on the JJC campus. Chemicals use and/or storage is routine in, but not limited to, the following areas or locations:

- Laboratories
- Fume hood exhausts on the roofs of laboratory buildings. (In general, signs have been posted on the roof access hatch or door restricting access to the roofs of buildings where fume hood exhausts are located).
- Chemical stock rooms.
- Agricultural Shops, Areas, and Chemical Storage.
- Chemical waste accumulation areas.
- Facility Services and Kitchen, paint and chemical storage areas.
- Custodial Closets.

The Project Coordinator shall inform the Contractor of the following:

- Known hazards and any required safety procedures that must be followed in the Contractor's work area.
- Methods for obtaining access to Material Safety Data Sheets (MSDS) for hazardous chemicals present in the Contractor's work area.
- Information about the labeling system used in the work area (NFPA 701).
- Emergency procedures that the Contractor is to follow in the event of accidental exposures or releases of hazardous chemicals.

If the work will be conducted on the roof of a building where fume hood exhausts are located, the Project Coordinator shall coordinate access with Facility Services, the departments within the building, and EHS, as necessary to ensure that:

- Fume hoods within, or adjacent to, the work area are shut down,
- No experiments are in-progress that would generate toxic or hazardous airborne contaminants;
- All chemicals stored within the fume hoods are capped or otherwise sealed; and
- The Contractor is informed of any special precautions that must be taken to prevent employee exposure to hazardous chemicals.

A minimum of seven days advance notice is generally required to coordinate fume hood shutdowns. In emergency situations (for example, when the Contractor's personnel must conduct work on, or in proximity to, active fume hood exhausts), the Contractor may access these roof areas if appropriate personal protective equipment is used. The Contractor shall be

informed in writing by the Project Coordinator of the precautions that should be taken to protect his or employees while conducting such work. This information may be obtained by contacting EHS at (815) 280-2384.

Given the number of chemicals used, and changing work within chemical laboratories, it is impractical for the college to provide the Contractor with a MSDS for any chemical potentially in-use within any given laboratory. However, MSDS's are required to be maintained and to be accessible to employees in each work area, and MSDS's for all chemicals may be obtained from Campus Police or EHS.

The Contractor shall assume that all hazardous chemicals or materials are handled and disposed of in accordance with federal and state regulations. Where a hazardous waste disposal manifest is required by these regulations, the Contractor shall contact EHS at (815) 280-2384 to assure that manifesting, storage, and the proposed disposal method and disposal site meet college and EPA requirements. The Contractor shall supply a copy of the completed waste manifest to EHS within 24 hours of receipt.

Where the Contractor has secured air samples documenting employee exposure to airborne chemical or particulate hazards during the course of his or her work, a copy of all air sample results shall be provided to EHS within 24-hours of receipt by the Contractor.

## **Electrical Safety and Lockout/Tagout**

If College employees will be present on the Contractors worksite, and employees of either JJC and/or the Contractor will be performing work that requires the use of lockout and/or tagout devices, the following requirements shall apply:

- The Project Coordinator and Contractor shall inform each other of their respective lockout/tagout procedures.
- The Project Coordinator and Contractor shall each inform their personnel regarding the energy control procedures that are to be followed on the project site.
- A copy of JJC 's Electrical Safety and Lockout/Tagout programs shall be provided to the Contractor upon request.
- A copy of the Contractors electrical safety and lockout/tagout program shall be made available to the college upon request.

## **Trenching and Excavations**

The Contractor shall coordinate trenching and excavation work with the Project Coordinator, Facility Services, and JULIE to assure the coordination of work and shutdown of utilities if necessary.

The design of sloping and benching systems, support systems, shield systems or other protective systems shall conform, at a minimum, to the OSHA requirements detailed in 29 CFR 1926 Subpart P requirements.

Trenching or excavations below the level of the base or footing of any foundation or retaining wall, or adjacent to any utility, sidewalk or roadway, will not be permitted unless:

- A support system, such as underpinning, is provided to ensure the safety of employees and the stability of the structure, or
- The excavation is in stable rock, or
- A registered professional engineer has approved the determination that such excavation work will not pose a hazard to employees or the structure.

This determination is the responsibility of the Contractor except as permitted, required or otherwise allowed by the project specifications or drawings

The Contractor shall notify the Project Coordinator of the name of the individual that is to serve as the Contractor's competent person as defined by this program and the OSHA regulations. The Contractor's designated competent person shall maintain a written log of the daily inspections made of excavations, adjacent areas, and protective systems. A copy of this written log shall be made available to the college upon request.

Where the design of a sloping and benching system, support system, shield systems or other protective systems requires review and approval by a registered professional engineer, the Contractor shall submit a copy of the completed review to the Project Coordinator and EHS prior to the start of work.

## **Hot Work**

Contractors performing hot work shall maintain a Hot Work Permit Program and employee-training program that meets the OSHA requirements found in 29 CFR 1926.352 and ANSI Z49.1-88 and NFPA 51B. Examples of hot work include, but are not limited to, use of open flames, compressed gasses or supplied fuel burning, brazing, cutting, grinding, soldering, thawing, pipe, torch applied roofing, and welding.

A copy of the canceled permit(s) shall be provided to the Project Coordinator and EHS after completion of the work.

## **Capital Projects**

### **Asbestos and Suspect Asbestos Containing Building Materials**

It is the responsibility of the Contractor to provide his or her own asbestos awareness program which shall include, but is not limited to, the information contained in this section and the OSHA asbestos-related regulations (29 CFR 1926.1101). Verification that this training has been conducted shall be supplied to the Architect/Engineer of record for the project and/or the college upon request.

The location of asbestos materials, where present within the jobsite, will be detailed in the construction documents for that project.

Asbestos materials may not be used or installed in College facilities.

## **Lead-containing Building Materials**

The location of lead materials, where present, will be detailed in the construction documents for that project.

Contractors that will disturb lead-containing building materials during the course of work shall take all necessary precautions to protect college employees and the public from exposure to lead dust or contamination. These measures shall conform, at a minimum, to the OSHA requirements detailed in 29 CFR 1926.62 and applicable local, state and federal regulations related to health, safety, transportation and disposal.

## **Confined Spaces**

Where the work of the Contractor involves entry into confined spaces, the Contractor shall perform such entry in accordance with the OSHA (e.g., 29 CFR 1926.20 and/or 1910.146) requirements. Where the work involves an existing college permit-required confined space, the Project Manager and/or Field Engineer shall coordinate with EHS to assure that:

- The Contractor is apprised of the elements, including the hazard(s) identified and the college's experience with the space, that make it a permit-required confined space.
- The Contractor is apprised of any precautions or procedures that the college has implemented for the protection of college employees in or near permit spaces where contractor personnel will be working.
- The Contractor is debriefed at the conclusion of the entry operations regarding the permit space program followed and any hazards confronted or created in permit spaces during entry operations.

The Contractor shall provide at least 24-hours advance notice to the Field Engineer when both college personnel and the Contractor's personnel will be working in or near permit-required confined spaces. The Field Engineer shall notify EHS at (815) 280-2384, and EHS shall assure that the college personnel have been informed of the precautions and procedures to be followed during entry operations. Under these circumstances the Contractor shall:

- Inform EHS of the permit space procedures the Contractor will follow;
- Inform EHS of any hazards confronted or created in permit spaces during entry operations.

## **Hazard Communication**

## SAFETY REQUIREMENTS FOR CONTRACTORS AND SUBCONTRACTORS

The Contractor shall maintain, on-site, Material Safety Data Sheets (MSDS's) for all chemicals used or stored at the job site as required by IDOL/OSHA regulations and the contract documents.

Chemicals are used extensively on the JJC campus. Chemical use is routine in, but not limited to, the following areas or locations:

- Laboratories.
- Fume hood exhausts on the roofs of laboratory buildings. (In general, signs have been posted on the roof access hatch or door restricting access to the roofs of buildings where fume-hood exhausts are located).
- Chemical stock rooms.
- Agricultural shop, areas, and chemical storage.
- Chemical waste accumulation areas.
- Facility Services and Residential and Dining Programs paint and chemical storage areas.
- Custodial closets.

Where necessitated by the work, the Field Engineer and/or Project Manager shall coordinate with EHS to assure that the Contractor is informed of the following:

- Known hazards and any required safety procedures that must be followed in the Contractor's work area.
- Methods for obtaining access to Material Safety Data Sheets (MSDS) for hazardous chemicals present in the Contractor's work area.
- Information about the labeling system used in the work area (NFPA 701).
- Emergency procedures that the Contractor is to follow in the event of accidental exposures or releases of hazardous chemicals.

If work will be conducted on the roof of a building, where fume hood exhausts are located, the Field Engineer shall coordinate access with Facility Services, the departments within the building and EHS as necessary to ensure that:

- Fume hoods within, or adjacent to, the work area are shut down,
- No experiments are in-progress that would generate toxic or hazardous airborne contaminants;
- All chemicals stored within the fume hoods are capped or otherwise sealed; and,
- The Contractor is informed of any special precautions that must be taken to prevent employee exposure to hazardous chemicals.

A minimum of seven days advance notice is generally required to coordinate fume hood shutdowns. In emergency situations (for example, when the Contractor's personnel must conduct work on, or in proximity to, active fume hood exhausts), the Contractor may access these roof areas if appropriate personal protective equipment is used. The Contractor shall be informed in writing by EHS of the precautions that should be taken to protect his or her

employees while conducting such work. The Field Engineer may request this information by contacting EHS at (815) 280-2384.

Given the number of chemicals used, and changing work within chemical laboratories, it is impractical for the college to provide the Contractor with a MSDS for any chemical potentially in-use within any given laboratory. However, MSDS's are required to be maintained and to be accessible to employees in each work area, and MSDS's for all chemicals may be obtained from EHS.

The Contractor shall assure that all hazardous chemicals or materials are handled and disposed of in accordance with federal and state regulations and the contract requirements.

## **Electrical Safety and Lockout/Tagout**

If college employees will be present on the Contractors worksite, and employees of either JJC and/or the Contractor will be performing work that requires the use of lockout and/or tagout devices, the following requirements shall apply:

- The EHS representative and the Contractor shall inform each other of their respective lockout/tagout procedures.
- The Project Manager and/or Field Engineer will coordinate with the EHS representative to assure that college personnel understand the energy control procedures that are to be followed in the project site.
- The Contractor shall assure that his/her personnel understand the energy control procedures that are to be followed on the project site.
- A copy of JJC's Electrical Safety and Lockout/Tagout programs shall be provided to the Contractor upon request.
- A copy of the Contractors electrical safety and lockout/tagout procedures shall be made available to the college upon request.

## **Trenching and Excavations**

The Contractor shall coordinate trenching and excavation work with the Project Manager and/or Field Engineer and JULIE to assure the coordination of work and shutdown of utilities as necessary.

The design of sloping and benching systems, support systems, shield systems or other protective systems shall conform, at a minimum, to the OSHA requirements detailed in 29 CFR 1926 Subpart P, and the requirements of the contract.

## **Hot Work**

Contractors performing hot work shall maintain a Hot Work Permit Program and employee-training program that meets the OSHA requirements found in 29 CFR 1926.352 and ANSI Z49.1-88 and NFPA 51B. Examples of hot work include, but are not limited to, use of open

flames, compressed gases or supplied fuel burning, brazing, cutting, grinding, soldering, thawing pipe, torch applied roofing, and welding.

## **Agencies/Firms With No Contractual Relationship with JJC**

All agencies/firms conducting work on JJC property shall comply with the requirements of NFPA, EPA, DOL, OSHA and this program, even where no formal contractual relationship exists between JJC and the agency/firm. The agency/firm shall maintain appropriate insurance, including general liability, auto liability, and workers compensation insurance. Verification of insurance shall be coordinated with JJC's Director of Risk Management, who may be reached at (815) 280-2325, prior to the start of work. Such agencies/firms shall not, without prior written approval of EHS:

- Use a product(s) or material(s) that has a permissible exposure limit (PEL) established by OSHA.
- Perform work on JJC property that may damage or disturb known or suspect asbestos materials,
- Perform work on JJC property that may damage or disturb known or suspect lead-containing materials,
- Perform work on JJC property that involves entry into a permit-required confined space,
- Perform work on any electrical system or utility,
- Construct nor enter excavations, nor
- Perform hot work.

## **Work Site Inspections**

### **Non-capital Projects**

Work site inspections may be conducted by EHS or other designated college personnel. These inspections are conducted solely for the benefit of the college, and shall not relieve the contractor of responsibility for enforcement of, and compliance with, OSHA, NFPA or EPA regulations.

In the event that work site conditions exist that potentially impact the safety of college employees, students, or the public, the college inspector shall issue a verbal or written warning to the Contractor and shall notify the Project Coordinator. If the unsafe conditions cannot be immediately corrected and represent a danger or have a potential to hard college employees, students or the public, then the college inspector will:

- Detail the NFPA, EPA or OSHA violations that were noted, and explain the potential impact upon college employees, students or the public,
- Require that the Project Coordinator have the Contractor either stop work or implement measures to isolate the hazardous condition until the unsafe condition can be mitigated,
- Issue a formal written report of the violation(s) to the Contractor. This report shall be copied to the Project Coordinator.



Reports of deficiencies may be factored into the evaluation of the contract by the college, and may be included in a vendor complaint file that is available for review by other state agencies. Repeat safety violations of a similar nature and/or a single serious willful safety violation by a Contractor may warrant review and termination of the contract.

## **Capital Projects**

Work site inspections may be conducted by EHS or other designated college representatives. Such inspections shall be coordinated with the Field Engineer and/or Project Manager. These inspections are conducted solely for the benefit of college personnel who may be working on the site and shall not relieve the contractor of responsibility for enforcement of, and compliance with NFPA, EPA, and OSHA regulations.

In the event that work site conditions exist that potentially impact the safety of college employees or the public, EHS shall notify the college Field Engineer and the Contractor of the hazard, and will assure that other college personnel present on-site are warned to avoid the area of the hazardous condition. The Contractor shall take prompt action to correct the hazardous condition. If the hazardous condition cannot be immediately corrected, the Contractor shall take effective steps to isolate the hazardous condition and/or shall stop work that is causing the hazardous condition until the hazard can be mitigated.

In the event that work site conditions exist that present an immediate safety hazard for the Contractors personnel, EHS may, as a courtesy, notify the Field Engineer and the Contractor of the hazardous condition. The Contractor shall take prompt action to correct the hazardous condition as required by the *General Conditions of the Construction Contract*.

## **Agencies/Firms Where No Formal Contractual Relationship Exists**

When hazardous condition are identified by EHS related to work performed by agencies/firms conducting work on JJC property where no formal contractual relationship exists between JJC and the agency/firm, the hazardous condition shall be immediately corrected. If the hazardous condition cannot be immediately corrected, the agency/firm shall stop work and shall take effective steps to isolate the hazardous condition from personnel and the public. Repeat safety violations of a similar nature or willful disregard for the NFPA, EPA or OSHA requirements or the requirements outlined in this program will result in immediate removal from JJC property.

## Definitions

**Capital Project:** A capital project is one whose total project cost exceeds \$500,000.

**Competent Person:** As related to excavation, trenching or shoring work, the Contractor's "competent person" means one who is capable of identifying existing and predictable hazards in the surroundings, or working conditions which are unsanitary, hazardous or dangerous to employees, and who has authorization to take prompt corrective measures to eliminate them.

**Confined Space:** A confined space is a space that is large enough for a person to enter, that has limited means for entry or exit, and that is not designed for continuous occupancy. Example include tanks, silos, storage bins or hopper, utility vaults and pits.

**Contracting Department:** The Department at the college that has contracted for work to be performed by a Contractor. In regards to agencies/firms conducting work on JJC property, where no formal contractual relationship exists between JJC and the agency/firm, the department that is coordinating or approving the work of the agency/firm is the Contracting Department.

**Contractor:** An entity or agency employed by the college to perform the installation or maintenance of equipment or the renovation or construction of a building, room or space on college property, or that provides services to the college on college property including, but not limited to, vending, supplies, erection of tents and other services.

**Field Engineer:** The representative from JJC's Facility Services department that oversees capital construction and/or renovation activities.

**Friable Asbestos:** An asbestos material that is capable of being reduced to powder by hand pressure when dry, or a nonfriable asbestos material that is subject to grinding, sanding, cutting or abrading or that is otherwise rendered by mechanical means.

**Lockout/Tagout:** A program used to ensure that employees are protected from sources of potentially hazardous energy. The program requires that hazardous energy sources be identified and locked and/or tagged-out before work is done on the system(s).

**Permit-required confined space:** A permit-required confined space is a confined space that contains potential or known safety hazards that must be dealt with prior to or during entry to assure the safety of those employees performing the work.

**Project Coordinator:** The individual(s) within a Department that has been assigned duties related to oversight or coordination of work performed by a Contractor as defined in this program.

**Project Manager:** The representative from JJC's Facility Services department that coordinates the work of the Field Engineer and the Architect/Engineer related to capital construction and/or renovation projects.

***Serious, willful safety violation:*** “Serious, willful safety violation” is defined, for the purposes of this program, as a work activity with a substantial probability that death or serious physical harm could result and where the hazard was known or should have been known, but where the work activity was continued regardless of the existence of the safety hazard.

## LABOR MANAGEMENT PROJECT AGREEMENT

This Agreement is entered into this \_\_\_\_ day of \_\_\_\_, 20\_\_ by and between Joliet Junior College, Illinois Community College District 525 of Will, Grundy, Kendall, LaSalle, Kankakee, Livingston, and Cook, Illinois, (hereinafter called the "Owner"); and \_\_\_\_\_ (hereinafter called the "Project Contractor"); and the \_\_\_\_\_ Building Trades Council (hereinafter called the "Union"), acting in their own behalf and on behalf of their respective affiliates and members; and the THREE RIVERS CONSTRUCTION ALLIANCE, acting on their own behalf and on the behalf of their respective affiliates and members, with respect to all construction projects at Joliet Junior College, which includes the Master Plan and Capital Improvement Plans thru August 2013, located in Will County, Illinois.

### WITNESSETH:

WHEREAS, to accomplish the goals of quality, cost effectiveness and timelessness requires that all participants exhibit a positive attitude intent on success; and

WHEREAS, there must exist amongst all parties a willingness to cooperate fully in devoting themselves to the goals of the Project; and

WHEREAS, this program has no room for adverse relationships, but only a true spirit of cooperation and commitment; and

WHEREAS, it is essential that the work required to construct this Project be accomplished in an efficient and economical manner so as to provide productivity, the highest levels of quality and the total elimination of delays thereby fostering new plateaus in labor/management cooperation; and

WHEREAS, Joliet Junior College, Illinois Community College District 525 of Will, Grundy, Kendall, LaSalle, Kankakee, Livingston, and Cook, Illinois, (hereinafter referred to as

the "Owner"), its general Contractor(s), its subcontractor(s) of whatever tier, the local Building Trades Council, the THREE RIVERS CONSTRUCTION ALLIANCE dedicate themselves to the goal that together, in full cooperation, local labor, and management will produce a project of excellent quality, as economically as possible, in a safe environment, under favorable working conditions; and

WHEREAS, nothing contained herein shall prevent the Owner from considering bids for the Project so long as the General Contractor and its Subcontractors agree to abide by the terms and provisions of this Agreement.

NOW, THEREFORE, for and in consideration of the mutual covenants above-contained and other good and valuable consideration, as hereinafter set forth, the parties do hereby agree as follows:

**SECTION 1. Introduction**

It is understood by the parties to this Agreement that other contractors awarded construction work directly or indirectly by the Owner will execute this Agreement and become signatory contractors for the purpose of this work.

The intent of the parties to this Agreement is to establish labor and management cooperation between the Owner, Project Contractor, all Contractors and Subcontractors performing construction work in this Project site, and the appropriate Unions signatory to this Agreement for the express purpose of producing a quality project on schedule, and, as economically as possible, in a safe environment under favorable working conditions.

**SECTION 2. Scope of the Agreement.**

A. This Project Agreement shall apply and is limited to the recognized and accepted historical definition of new construction work under the direction of and performed by the

Contractor(s), of whatever tier, which may include the Project Contractor, who have contracts awarded for such work on the Project. Such work shall include site preparation work and dedicated off-site work.

It is agreed that the Project Contractor shall require all Contractors of whatever tier who have been awarded contracts for work covered by this Agreement, to accept and be bound by the terms and conditions of this Agreement by executing the Letter of Assent (Attachment A) prior to commencing work. The Project Contractor shall assure compliance with this Agreement by the Contractors. It is further agreed that, where there is a conflict, the terms and conditions of this Agreement shall supersede and override terms and conditions of any and all other national, area, or local collective bargaining agreements, except for all work performed under the NTL Articles of Agreement, and the National Stack/Chimney Agreement, the National Cooling Tower Agreement. All instrument calibration work and loop checking shall be performed under the terms of the UA/IBEW Joint National Agreement for Instrument and Control Systems Technicians, and the National Agreement of the International Union of Elevator Constructors, with the exception of Section 4, 5 and 6 of this Agreement, which shall apply to such work.

B. Nothing contained herein shall be construed to prohibit, restrict or interfere with the performance of any other operation, work, or function which may occur at the Project site or be associated with the development of the Project.

C. This Agreement shall only be binding on the signatory parties hereto and shall not apply to their parents, affiliates or subsidiaries.

D. The Owner and/or the Project Contractor have the absolute right to select any qualified bidder for the award of contracts on this Project without reference to the existence or non-existence of any agreements between such bidder and any party to this Agreement;

provided, however, only that such bidder is willing, ready and able to become a party to and comply with this Agreement, should it be designated the successful bidder.

E. The provisions of this Agreement shall not apply to Owner, and nothing contained herein shall be construed to prohibit or restrict Owner or its employees from performing work not covered by this Agreement on the Project site. As areas and systems of the Project are inspected and construction tested by the Project Contractor or Contractors and accepted by the Owner, the Agreement will not have further force or effect on such items or areas, except when the Project Contractor or Contractors are directed by the Owner to engage in repairs, modifications, check-out, and warranty functions required by its contract with the Owner during the term of this Agreement.

F. It is understood that the Owner, at its sole option, may terminate, delay and/or suspend any or all portions of the Project at any time.

G. It is understood that the liability of any employer and the liability of the separate unions under this Agreement shall be several and not joint. The unions agree that this Agreement does not have the effect of creating any joint employer status between or among the Owner, Contractor(s) or any employer.

### SECTION 3. Labor-Management Cooperation Committee

The parties to this Agreement hereby reaffirm the necessity for joint cooperation and participation by Labor and Management in interpreting and analyzing the effectiveness of management's application of this Agreement as well as Labor's response and any other matter affecting quality, safety, working conditions and productivity. Therefore, to secure this end, it is hereby agreed that a "Labor-Management Cooperation Committee" will be established composed of three representatives from Labor and three representatives from Management; one

representative from labor and one from Management shall be Co-Chairpersons of this Committee.

The Labor-Management Cooperation Committee shall meet a minimum of once each month, at the job site, and shall discuss the following; reports concerning any violation, dispute, questions or interpretation of the application of practices arising out of this Agreement; safety; working conditions; absenteeism; labor turnover; availability of qualified journeymen; need for training; and any other matter affecting productivity and efficiency on this project.

In the event a dispute is not resolved by the Labor-Management Cooperation Committee, such matter shall then be settled as outlined by the grievance procedure and/or arbitration provisions contained in Section 6 or 7 of this Agreement. The Labor-Management Cooperation Committee shall have no authority to render a decision involving a jurisdictional dispute.

#### SECTION 4. Contractor's Commitment

A Work assignments will be made in accordance with area practice, consistent with the efficient and economical performance of the work.

B. Before performing the work at the job site, the Contractor or Subcontractors of whatever tier actually performing the work will become signatory to the appropriate collective bargaining agreement.

C. The Contractors and Subcontractors shall exercise their management rights. These rights shall include planning, directing, hiring, dismissal, lay-off, transferring, appointing foremen and general foremen and otherwise directing the work force.

D. The Project Contractor agrees that neither it nor any of its contractors or subcontractors will subcontract any work to be done on the Project except to a person, firm or corporation who is or agrees to become party to this Agreement. Any contractor or subcontractor



working on the Project shall, as a condition to working on said Project, become signatory to and perform all work under the terms of this Agreement.

SECTION 5. Union (Craftsman) Commitment

A. Qualified and skilled craftsmen will be furnished as required by the Contractor in the fulfillment of its obligations of the Owner.

B. Craftsmen shall be at their place of work at the regular starting time and shall remain at their place of work until quitting time. There shall be no limit on production by Craftsmen nor restrictions on the use of tools or equipment other than that which may be required by safety practice.

C. Where stewards are appointed by respective unions, the steward shall be qualified craftsmen performing the work of his craft who shall exercise no supervisory functions. There shall be no non-working stewards.

SECTION 6. Disputes and Grievances

A. This Agreement is intended to provide close cooperation between management and labor. Each of the Unions will assign a representative to this Project for the purpose of completing the construction of the Project economically, efficiently, continuously, and without interruptions, delays, or work stoppages.

B. The Contractors, Unions, and the employees, collectively and individually, realize the importance to all parties to maintain continuous and uninterrupted performance of the work of the Project, and agree to resolve disputes in accordance with the grievance-arbitration provisions set forth in this Article.

C. Any question or dispute arising out of and during the term of this Project Agreement (other than grievances not covered by a local Collective Bargaining Agreement or trade

jurisdictional disputes) shall be considered a grievance and subject to resolution under the following procedures:

Step 1. (a) When any employee subject to the provisions of this Agreement feels he or she is aggrieved by a violation of this Agreement, he or she, through his or her local union business representative or job steward, shall, within five (5) working days after the occurrence of the violation, give notice to the work-site representative of the involved Contractor stating the provision(s) alleged to have been violated. The business representative of the local union or the job steward and the work-site representative of the involved Contractor and the Project Contractor shall meet and endeavor to adjust the matter within three (3) working days after timely notice has been given. The representative of the Contractor shall keep the meeting minutes and shall respond to the Union representative in writing (copying the Project Contractor) at the conclusion of the meeting but not later than twenty-four (24) hours thereafter. If they fail to resolve the matter within the prescribed period, the grieving party may, within forty-eight (48) hours thereafter, pursue Step 2 of the Grievance Procedure, provided the grievance is reduced to writing, setting forth the relevant information concerning the alleged grievance, including a short description thereof, the date on which the grievance occurred, and the provision(s) of the Agreement alleged to have been violated.

(b) Should the Local Union(s) or the Project Contractor or any Contractor have a dispute with the other party and, if after conferring, a settlement is not reached within three (3) working days, the dispute may be reduced to writing and proceed to Step 2 in the same manner as outlined herein for the adjustment of an employee complaint.

Step 2. The International Union Representative and the involved Contractor shall meet within seven (7) working days of the referral of a dispute to this second step to arrive at a

satisfactory settlement thereof. Meeting minutes shall be kept by the Contractor. If the parties fail to reach an agreement, the dispute may be appealed in writing in accordance with the provisions of Step 3 within seven (7) calendar days thereafter.

Step 3. (a) If the grievance has been submitted but not adjusted under Step 2, either party may request in writing, within seven (7) calendar days thereafter, that the grievance be submitted to an Arbitrator mutually agreed by them. The Contractor and the involved Union shall attempt mutually to select an arbitrator, but if they are unable to do so, they shall request the American Arbitration Association to provide them with a list of arbitrators from which the Arbitrator shall be selected. The rules of the American Arbitration Association shall govern the conduct of the arbitration hearing. The decision of the Arbitrator shall be final and binding on all parties. The fee and expenses of such Arbitration shall be borne equally by the Contractor and the involved Local Union(s).

(b) Failure of the grieving party to adhere to the time limits established herein shall render the grievance null and void. The time limits established herein may be extended only by written consent of the parties involved at the particular step where the extension is agreed upon. The Arbitrator shall have the authority to make decisions only on issues presented to him or her, and he or she shall not have authority to change, amend, add to or detract from any of the provisions of this Agreement.

D. The Project Contractor and Owner shall be notified of all actions at Steps 2 and 3 and shall, upon their request, be permitted to participate in all proceedings at these steps.

#### SECTION 7. Jurisdictional Disputes

A. The assignment of work will be solely the responsibility of the Contractor performing the work involved; and such work assignments will be in accordance with the Plan for the

Settlement of Jurisdictional Disputes in the Construction Industry (the "Plan") or any successor Plan.

B. All jurisdictional disputes on this Project, between or among Building and Construction Trades Unions and employers, parties to this Agreement, shall be settled and adjusted according to the present Plan established by the Building and Construction Trades Department or any other plan or method of procedure that may be adopted in the future by the Building and Construction Trades Department. Decisions rendered shall be final, binding and conclusive on the Contractors and Unions parties to this Agreement.

C. All jurisdictional disputes shall be resolved without the occurrence of any strike, work stoppage, or slow-down of any nature, and the Contractor's assignment shall be adhered to until the dispute is resolved. Individuals violating this section shall be subject to immediate discharge.

D. Each Contractor will conduct a pre-job conference with the appropriate Building and Construction Trades Council prior to commencing work. The Project Contractor and the Owner will be advised in advance of all such conferences and may participate if they wish.

#### SECTION 8. Joint Commitment (Contractor/Union)

A. Utilization of Union apprentices will be maximized consistent with the best interest of the job in compliance with Local Union Agreements. The high level of union apprenticeship training will be maintained to provide the Industry with productive and knowledgeable craftsmen for the long term.

B. Every reasonable and practicable measure, consistent with the protection of human-dignity, will be taken to assure a work place free of alcohol and drugs. The use of liquor, drugs or any other illegal activities at the Project site, including parking lots, is strictly prohibited.

C. Employees will take their breaks only in their immediate work areas.

D. Acknowledging the safety concerns of Owner and its risk management professionals, we assure the Owner that the parties are committed to safe working practices on the project. The parties, drawing upon the comprehensive safety programs and resources developed by the union construction community, will comply with federal, state and local safety regulations. Both contractors and union craftsmen are well trained in safety practices and commit themselves to applying such practices on this job.

E. The Contractors and Unions agree that there will be no lockouts or work stoppages.

(1) The Contractors and Subcontractors shall not cause, incite, encourage or participate in any lockout of employees on the project during the term of this Agreement.

(2) The Union and its members, agents, representatives, and employees shall not allow, incite, encourage, condone or participate in any strike, walkout, slowdown, picketing, sympathy strike or other work stoppage of any nature whatsoever, whether jurisdictional or otherwise, or observe any picket of any nature during the term of this Agreement. Any such action by the Union or its members, agents, representatives or employees shall be considered a violation of this Agreement.

(3) All employees shall continue to work and to perform all their obligations on the project despite the expiration of any local or other collective bargaining agreement. Any future wage or fringe benefit increase, decrease or modification legally negotiated and established by appropriate local collective bargaining agreement of the Local Unions which are signatories to this Agreement shall be paid retroactively to the expiration date of the preceding local Agreement.

(4) Should any unauthorized strike, slowdown, stoppage of work or interference with construction occur, the Union shall take all necessary steps to bring such activity to a prompt resolution.

SECTION 9. Helmets To Hardhats

A. The Contractors and the Unions recognize a desire to facilitate the entry into the building and construction trades of veterans who are interested in careers in the building and construction industry. The Contractors and Unions agree to utilize the Center for Military Recruitment, Assessment and Veterans Employment (hereinafter "Center") and the Center's "Helmets to Hardhats" program to serve as a resource for preliminary orientation, assessment of construction aptitude, referral to apprenticeship programs or hiring halls, counseling and mentoring, support network, employment opportunities and other needs as identified by the parties.

B. The Unions and Contractors agree to coordinate with the Center to create and maintain an integrated database of veterans interested in working on this Project and of apprenticeship and employment opportunities for this Project. To the extent permitted by law, the Unions will give credit to such veterans for bona fide, provable past experience.

SECTION 10. Term of Agreement.

A. This Agreement shall become effective on \_\_\_\_\_, 20\_\_\_\_, and shall remain in full force and effect as long as signatory contractors are working on this project.

B. Any of the undersigned parties shall have the right to terminate this Agreement by notifying all other parties in writing, within at least thirty (30) calendar days from the proposed termination date.

### SECTION 11. Notices

The address and telephone number of all of the undersigned shall be on file with Owner's Director of Facility Services at the Highland Building, 1215 Houbolt Road, Joliet, Illinois, 60431, Attention: Patrick VanDuyne. All notices, request and other communications under this Agreement shall be in writing and shall be personally served or sent by certified mail, postage prepaid, return receipt requested, facsimile, or by licensed overnight courier to the appropriate party at the address set forth below or as may otherwise be on file with the Director of Physical Plant as provided herein. Notice shall be deemed given at the time delivered, if personally delivered, at the time indicated on the duly completed postal service return receipt, if delivered, at the time indicated on the duly completed postal service return receipt, if delivered by certified mail, at the time the facsimile is transmitted, if delivered by facsimile, or on the next business day after such notice is sent, if delivered by overnight courier. If a person elects to change their address, they shall do so by notifying the Owner's Director of Facility Services in the manner as provided for herein for the delivery of a notice.

### SECTION 12. Miscellaneous Provisions.

A. Assignment. No party may assign its rights hereunder without the prior written consent of the other parties.

B. Entire Agreement. This Agreement contains the entire agreement between the parties with respect to the subject matter hereof and may not be modified, except in writing signed by the parties hereto. Furthermore, the parties hereto specifically agree that all prior agreements, whether written or oral, relating to the subject matter hereof shall be of no further force or effect from and after the date hereof.

C. Non-Partnership. This Agreement shall not create a partnership, joint venture or other joint enterprises between the parties hereto.

D. Severability. If any phrase, clause or provision of this Agreement is declared invalid or unenforceable by a court of competent jurisdiction, such phrase, clause or provisions shall be deemed severed from this Agreement, but will not affect any other provision of this Agreement, which shall otherwise remain in full force and effect. If any restriction or limitation in this Agreement is deemed to be unreasonable, onerous and unduly restrictive by a court of competent jurisdiction, it shall not be stricken in its entirety and held totally void and unenforceable, but shall not be deemed rewritten and shall remain effective to the maximum extent permissible within reasonable bounds.

E. Prevailing Party. The prevailing party or parties in any litigation arising out of or from this Agreement shall be entitled to recover from the non-prevailing party or parties all costs and expenses reasonably incurred litigating such action, including without limitation, reasonable attorneys' and paralegals' fees and court cost.

F. Neutral Reading. It is the intent of the parties that this Agreement be deemed to have been prepared by all of the parties hereto.

G. Waiver. No waiver of any breach or default hereunder shall be considered valid unless in writing and signed by the party given such waiver and no such waiver shall be deemed a waiver of any subsequent breach or default of the same or similar nature.

H. Headings. The section and subsection headings contained herein are for convenience of the parties only and are not intended to define or limit the context of said Sections and subsections.



I. Governing Law; Venue. The validity, construction and interpretation of this Agreement shall be governed by the State of Illinois. The parties hereto irrevocably agree that all actions or proceedings in any way, manner or respect arising out of or from or related to this Agreement shall be litigated only in the Circuit Court Twelfth Judicial Circuit, Will County, Illinois.

J. Counterparts. This Agreement may be executed in two or more counterparts, each of which may be deemed to be an original.

IN WITNESS WHEREOF, the parties have executed this Agreement on the day and year first above written.

SIGNED FOR THE OWNER:

*PK Day*

Firm: Joliet Junior College

Title: Director of Facility Services

Date: 4-15-09

Address: 1215 Houbolt Road  
Joliet, Illinois 60431

SIGNED FOR THE UNION:

*Ronald C. Fisi*

*Will County* Building Trades Council

Title: President

Date: 4-15-09

Address: 2082 Oakleaf St.  
Joliet IL 60436

SIGNED FOR THE ALLIANCE:

*Bob Boish*

Firm: Three River's Construction Alliance

Title: Co-Chair TRCA

Date: 4/15/09

Address: 2134 Maxim Dr.  
Rockdale IL 60436

SIGNED FOR BY THE CONTRACTOR:

Firm: \_\_\_\_\_

Title: \_\_\_\_\_

Date: \_\_\_\_\_

Address: \_\_\_\_\_



*Skilled Union Craftsmen  
Professional Union Contractors*

## **BLUEPRINT FOR SUCCESS**

### **A Labor-Management Project Agreement**

#### **I. Preamble**

To accomplish the goals of quality, cost effectiveness and timeliness requires that all participants exhibit a positive attitude intent on success. There must exist amongst all parties a willingness to cooperate fully in devoting themselves to the goals of the project.

This program has no room for adverse relationships, but only a true spirit of cooperation and commitment. It is essential that the work required to construct this project be accomplished in an efficient and economical manner so as to provide productivity, the highest levels of quality, and the total elimination of delays. This commitment will establish new plateaus in labor/management cooperation.

Therefore, Joliet Junior College, Illinois Community College District 525, of Will, Grundy, Kendall, LaSalle, Kankakee, Livingston and Cook, Illinois, (hereinafter referred to as the "Owner"), its subcontractor(s) of whatever tier, the Will & Grundy Counties Building Trades Council, and the THREE RIVERS' CONSTRUCTION ALLIANCE dedicate themselves to the goal that together, in full cooperation, local labor and management will produce a project of excellent quality, as economically as possible, in a safe environment, under favorable working conditions.

#### **II. Introduction**

This Agreement is entered into this        day of                    by and between Joliet Junior College (hereinafter called the "Owner"); and                    (hereinafter called and the "Project Contractor"; and the Will & Grundy Counties Building Trades Council (hereinafter called the "Union"), acting in their own behalf and on behalf of their respective affiliates and members; and the THREE RIVERS CONSTRUCTION ALLIANCE, acting on their own behalf and on behalf of their respective affiliates and members, with respect to all construction projects at Joliet Junior College, which includes the Master Plan and Capital Improvement Plan projects thru                    located in Will County, Illinois.

It is understood by the parties to this Agreement that other contractors awarded construction work directly or indirectly by the "Owner" will execute this Agreement and become signatory contractors for the purpose of this work.

The intent of the parties to this Agreement is to establish labor and management cooperation between the Project Contractor, all Contractors and Subcontractors performing construction work on this project site, and the appropriate Unions signatory to this Agreement for the express purpose of producing a quality project on schedule and as economically as possible, in a safe environment under favorable working conditions.

### **III. Scope Of The Agreement**

**A.** This Project Agreement shall apply and is limited to the recognized and accepted historical definition of new construction work under the direction of and performed by the Contractor(s), of whatever tier, which may include the Project Contractor, who have contracts awarded for such work on the Project. Such work shall include site preparation work and dedicated off-site work.

It is agreed that the Project Contractor shall require all Contractors of whatever tier who have been awarded contracts for work covered by this Agreement, to accept and be bound by the terms and conditions of this Project Agreement by executing the Letter of Assent (Attachment A) prior to commencing work. The Project Contractor shall assure compliance with this Agreement by the Contractors. It is further agreed that, where there is a conflict, the terms and conditions of this Project Agreement shall supersede and override terms and conditions of any and all other national, area, or local collective bargaining agreements, except for all work performed under the NTL Articles of Agreement, the National Stack/Chimney Agreement, the National Cooling Tower Agreement, all instrument calibration work and loop checking shall be performed under the terms of the UA/IBEW Joint National Agreement for Instrument and Control Systems Technicians, and the National Agreement of the International Union of Elevator Constructors, with the exception of Article V, VI, and VII of this Project Agreement, which shall apply to such work.

**B.** Nothing contained herein shall be construed to prohibit, restrict or interfere with the performance of any other operation, work, or function which may occur at the Project site or be associated with the development of the Project.

**C.** This Agreement shall only be binding on the signatory parties hereto and shall not apply to their parents, affiliates or subsidiaries.

**D.** The Owner and/or the Project Contractor have the absolute right to select any qualified bidder for the award of contracts on this Project without reference to the existence or non-existence of any agreements between such bidder and any party to this Agreement; provided, however, only that such bidder is willing, ready and able to become a party to and comply with this Project Agreement, should it be designated the successful bidder.

**E.** It is understood that the Owner, at its sole option, may terminate, delay and/or suspend any or all portions of the Project at any time.

**F.** It is understood that the liability of any employer and the liability of the separate unions under this Agreement shall be several and not joint. The unions agree that this Agreement does not have the effect of creating any joint employer status between or among the Owner, Contractor(s) or any employer.

### **IV. Labor-Management Cooperation Committee**

The parties to this Agreement hereby reaffirm the necessity for joint cooperation and participation by Labor and Management in interpreting and analyzing the effectiveness of management's application of this Agreement as well as Labor's response and any other matter affecting quality, safety, working conditions and productivity. Therefore, to secure this end, it is hereby agreed that a "Labor-Management Cooperation Committee" will be established composed of three representatives from Labor and three representatives from Management; one representative from Labor and one from Management shall be Co-Chairmen of this Committee.

The Labor-Management Cooperation Committee shall meet a minimum of once each month, at the jobsite, and shall discuss the following: reports concerning any violation, dispute, questions or interpretation of the application of practices arising out of this Agreement; safety; working conditions; absenteeism; labor turnover; availability of qualified journeymen; need for training; and any other matter affecting productivity and efficiency on this project.

In the event a dispute is not resolved by the Labor-Management Cooperation Committee, such matter shall then be settled as outlined by the grievance procedure and/or arbitration provisions contained in Articles VII or VIII of this Agreement. The Labor-Management Cooperation Committee shall not have authority to render a decision involving a jurisdictional dispute.

#### **V. Contractors' Commitment**

A. Work assignments will be made in accordance with area practice, consistent with the efficient and economical performance of the work.

B. Before performing work at the job site, the Contractor or Subcontractors of whatever tier actually performing the work will become signatory to the appropriate collective bargaining agreement.

C. The Contractors and Subcontractors shall exercise their management rights. These rights shall include planning, directing, hiring, dismissal, lay-off, transferring, appointing foremen and general foremen and otherwise directing the work force.

D. The Project Contractor agrees that neither it nor any of its contractors or subcontractors will subcontract any work to be done on the Project except to a person, firm or corporation who is or agrees to become party to this Agreement. Any contractor or subcontractor working on the Project shall, as a condition to working on said Project, become signatory to and perform all work under the terms of this Agreement.

#### **VI. Union (Craftsmen) Commitment**

A. Qualified and skilled craftsmen will be furnished as required by the Contractor in the fulfillment of its obligations to the Owner.

B. Craftsmen shall be at their place of work at the regular starting time and shall remain at their place of work until quitting time. There shall be no limit on production by Craftsmen nor restrictions on the use of tools or equipment other than that which may be required by safety practice.

C. Where stewards are appointed by respective unions, the steward shall be a qualified craftsman performing the work of his craft who shall exercise no supervisory functions. There shall be no non-working stewards.

#### **VII. Owner Commitment**

A. The Owner agrees that during the life of this agreement he shall assign construction work on this project only to contractors who are signatory to this agreement and applicable local collective bargaining agreements.

#### **VIII. Disputes & Grievances**

A. This Agreement is intended to provide close cooperation between management and labor. Each of the Unions will assign a representative to this Project for the purpose of completing the construction of the Project economically, efficiently, continuously, and without interruptions, delays, or work stoppages.

B. The Contractors, Unions, and the employees, collectively and individually, realize the importance to all parties to maintain continuous and uninterrupted performance of the work of the Project, and agree to resolve disputes in accordance with the grievance-arbitration provisions set forth in this Article.

**C.** Any question or dispute arising out of and during the term of this Project Agreement (other than grievances not covered by a local Collective Bargaining Agreement or trade jurisdictional disputes) shall be considered a grievance and subject to resolution under the following procedures:

Step 1. (a) When any employee subject to the provisions of this Agreement feels he or she is aggrieved by a violation of this Agreement, he or she, through his or her local union business representative or job steward, shall, within five (5) working days after the occurrence of the violation, give notice to the work-site representative of the involved Contractor stating the provision(s) alleged to have been violated. The business representative of the local union or the job steward and the work-site representative of the involved Contractor and the Project Contractor shall meet and endeavor to adjust the matter within three (3) working days after timely notice has been given. The representative of the Contractor shall keep the meeting minutes and shall respond to the Union representative in writing (copying the Project Contractor) at the conclusion of the meeting but not later than twenty-four (24) hours thereafter. If they fail to resolve the matter within the prescribed period, the grieving party may, within forty-eight (48) hours thereafter, pursue Step 2 of the Grievance Procedure, provided the grievance is reduced to writing, setting forth the relevant information concerning the alleged grievance, including a short description thereof, the date on which the grievance occurred, and the provision(s) of the Agreement alleged to have been violated.

(b) Should the Local Union(s) or the Project Contractor or any Contractor have a dispute with the other party and, if after conferring, a settlement is not reached within three (3) working days, the dispute may be reduced to writing and proceed to Step 2 in the same manner as outlined herein for the adjustment of an employee complaint.

Step 2. The International Union Representative and the involved Contractor shall meet within seven (7) working days of the referral of a dispute to this second step to arrive at a satisfactory settlement thereof. Meeting minutes shall be kept by the Contractor. If the parties fail to reach an agreement, the dispute may be appealed in writing in accordance with the provisions of Step 3 within seven (7) calendar days thereafter.

Step 3. (a) If the grievance has been submitted but not adjusted under Step 2, either party may request in writing, within seven (7) calendar days thereafter, that the grievance be submitted to an Arbitrator mutually agreed upon by them. The Contractor and the involved Union shall attempt mutually to select an arbitrator, but if they are unable to do so, they shall request the American Arbitration Association to provide them with a list of arbitrators from which the Arbitrator shall be selected. The rules of the American Arbitration Association shall govern the conduct of the arbitration hearing. The decision of the Arbitrator shall be final and binding on all parties. The fee and expenses of such Arbitration shall be borne equally by the Contractor and the involved Local Union(s).

(b) Failure of the grieving party to adhere to the time limits established herein shall render the grievance null and void. The time limits established herein may be extended only by written consent of the parties involved at the particular step where the extension is agreed upon. The Arbitrator shall have the authority to make decisions only on issues presented to him or her, and he or she shall not have authority to change, amend, add to or detract from any of the provisions of this Agreement.

**D.** The Project Contractor and Owner shall be notified of all actions at Steps 2 and 3 and shall, upon their request, be permitted to participate in all proceedings at these steps.

## **IX. Jurisdictional Disputes**

**A.** The assignment of work will be solely the responsibility of the Contractor performing the work involved; and such work assignments will be in accordance with the Plan for the Settlement of Jurisdictional Disputes in the Construction Industry (the "Plan") or any successor Plan.

**B.** All jurisdictional disputes on this Project, between or among Building and Construction Trades Unions and employers, parties to this Agreement, shall be settled and adjusted according to the present Plan established by the Building and Construction Trades Department or any other plan or method of procedure that may be

adopted in the future by the Building and Construction Trades Department. Decisions rendered shall be final, binding and conclusive on the Contractors and Unions parties to this Agreement.

**C.** All jurisdictional disputes shall be resolved without the occurrence of any strike, work stoppage, or slow-down of any nature, and the Contractor's assignment shall be adhered to until the dispute is resolved. Individuals violating this section shall be subject to immediate discharge.

**D.** Each Contractor will conduct a pre-job conference with the appropriate Building and Construction Trades Council prior to commencing work. The Project Contractor and the Owner will be advised in advance of all such conferences and may participate if they wish.

#### **X. Joint Commitment (Contractor/Union)**

**A.** Utilization of Union apprentices will be maximized consistent with the best interest of the job in compliance with Local Union Agreements. The high level of union apprenticeship training will be maintained to provide the Industry with productive and knowledgeable craftsmen for the long term.

**B.** Every reasonable and practicable measure, consistent with the protection of human dignity, will be taken to assure a work place free of alcohol and drugs. The use of liquor, drugs or any other illegal activities at the Project site, including parking lots, is strictly prohibited.

**C.** Employees will take their breaks only in their immediate work areas.

**D.** Acknowledging the safety concerns of today's construction Owner and its risk management professionals, we assure the Owner that the parties are committed to safe working practices on the project. The parties, drawing upon the comprehensive safety programs and resources developed by the Union construction community, will comply with federal, state, and local safety regulations. Both contractors and union craftsmen are well trained in safety practices and commit themselves to applying such practices on this job.

**E.** The Contractors and Unions agree that there will be no lockouts or work stoppages.

(1) The Contractors and Subcontractors shall not cause, incite, encourage or participate in any lockout of employees on the project during the term of this Agreement.

(2) The Union and its members, agents, representatives, and employees shall not allow, incite, encourage, condone or participate in any strike, walkout, slowdown, picketing, sympathy strike or other work stoppage of any nature whatsoever, whether jurisdictional or otherwise, or observe any picket of any nature during the term of this Agreement. Any such action by the Union or its members, agents, representatives or employees shall constitute a violation of this Agreement.

(3) All employees shall continue to work and to perform all their obligations on the project despite the expiration of any local or other collective bargaining agreement. Any future wage or fringe benefit increase, decrease or modification legally negotiated and established by appropriate local collective bargaining agreements of the Local Unions which are signatories to this Agreement shall be paid retroactively to the expiration of the preceding local Agreement.

(4) Should any unauthorized strike, slowdown, stoppage of work or interference with construction occur, the Union shall take all necessary steps to bring such activity to a prompt resolution.

**XI. Helmets To Hardhats**

A. The Employers and the Unions recognize a desire to facilitate the entry into the building and construction trades of veterans who are interested in careers in the building and construction industry. The Employers and Unions agree to utilize the Center for Military Recruitment, Assessment and Veterans Employment (hereinafter "Center") and the Center's "Helmets to Hardhats" program to serve as a resource for preliminary orientation, assessment of construction aptitude, referral to apprenticeship programs or hiring halls, counseling and mentoring, support network, employment opportunities and other needs as identified by the parties.

B. The Unions and Employers agree to coordinate with the Center to create and maintain an integrated database of veterans interested in working on this Project and of apprenticeship and employment opportunities for this Project. To the extent permitted by law, the Unions will give credit to such veterans for bona fide, provable past experience.

**XII. Term of Agreement**

A. This Agreement shall become effective on April 15, 2009, and shall remain in full force and effect as long as signatory contractors are working on this project.

B. Either party shall have the right to terminate this Agreement by notifying all other parties, in writing, within at least thirty (30) calendar days from the proposed termination date.

**FOR THE OWNER:**

*Alex Prouty*  
JOLIET JUNIOR COLLEGE  
TITLE: *President*  
DATE: *4-15-09*

**FOR THE PROJECT CONTRACTOR:**

\_\_\_\_\_  
TITLE: \_\_\_\_\_  
DATE: \_\_\_\_\_

**FOR THE ALLIANCE:**

*Bob Bush*  
THREE RIVERS CONSTRUCTION  
TITLE: *CO-CHAIR TRCA*  
DATE: *4/15/09*

**FOR THE BUILDING TRADES:**

*Ronald C. Fier*  
WILL & GRUNDY BUILDING TRADES  
TITLE: *Presid.*  
DATE: *4-15-09*



*Skilled Union Craftsmen  
Professional Union Contractors*

## BLUEPRINT FOR SUCCESS

### A Labor-Management Project Agreement

#### Addendum To TRCA/JJC Project Labor Agreement Dated 4-15-09

1. It is agreed to by all parties that while the College has completed their Master Plan projects, the parties to the Agreement wish to continue on with the 'Blueprint for Success, A Labor-Management Project Agreement' signed on April 15, 2009. The conditions of the existing Agreement shall remain in effect thru April 2018 until such time as both parties have the opportunity to evaluate current and future construction projects at the College as explained in Article XII of the Agreement.
2. The pre-job conferences called for in Article IX Section D will apply to all bids with a gross value in excess of \$25,000.00. Bids less that the stated \$25,000.00 will be exempt from the pre-job conference but the OWNER agrees to notify TRCA of any such bid lettings in a timely manner.
3. This Agreement covers all new construction and improvement projects but is not intended to nor will it interfere with the OWNER's right to perform general routine maintenance on their facilities.

FOR THE OWNER:

*[Signature]*  
Joliet Junior College

*Judy Mitchell, Esq.*  
Printed Name

TITLE: *VP Administrative Svcs*

DATE: *3-9-15*

FOR THE BUILDING TRADES

*[Signature]*  
Will & Grundy Counties Building Trades Council

*Don Gregory*  
Printed Name

TITLE: *President*

DATE: *3-9-15*

FOR THE ALLIANCE:

*[Signature]*  
T.R.C.A.

*Thomas A. White*  
Printed Name

TITLE: *Executive Director*

DATE: *3-9-15*



# Will County Prevailing Wage Rates posted on 1/15/2025

Trade Title	Rg	Type	C	Base	Foreman	Overtime					Pension	Vac	Trng	Other Ins	Add OT 1.5x owed	Add OT 2.0x owed
						M-F	Sa	Su	Hol	H/W						
ASBESTOS ABT-GEN	All	ALL		50.15	51.15	1.5	1.5	2.0	2.0	17.71	16.92	0.00	0.91		0.00	0.00
ASBESTOS ABT-MEC	All	BLD		41.27	44.57	1.5	1.5	2.0	2.0	15.84	16.02	0.00	0.90		3.11	6.21
BOILERMAKER	All	BLD		55.76	60.77	2.0	2.0	2.0	2.0	6.97	26.44	0.00	3.34	1.95	0.00	38.26
BRICK MASON	All	BLD		52.06	57.27	1.5	1.5	2.0	2.0	12.70	24.54	0.00	1.24	0.00	3.99	7.98
CARPENTER	All	ALL		55.11	60.62	2.0	2.0	2.0	2.0	12.89	30.48	0.70	0.93	0.00	0.00	0.00
CEMENT MASON	All	ALL		47.70	49.70	2.0	1.5	2.0	2.0	12.70	32.80	0.00	0.80	0.00	0.00	0.00
CERAMIC TILE FINISHER	All	BLD		47.09	47.09	1.5	1.5	2.0	2.0	13.00	16.82	0.00	1.09	0.00	5.17	10.34
CERAMIC TILE LAYER	All	BLD		54.84	59.84	1.5	1.5	2.0	2.0	13.00	20.68	0.00	1.17	0.00	7.15	14.30
COMMUNICATION TECHNICIAN	All	BLD		44.00	48.40	1.5	1.5	2.0	2.0	17.19	17.60	0.00	0.75	2.37	0.00	0.00
ELECTRIC PWR EQMT OP	All	ALL		62.10	68.14	1.5	1.5	2.0	2.0	13.08	20.88	0.00	3.32	0.00	18.64	37.28
ELECTRIC PWR GRNDMAN	All	ALL		48.44	68.14	1.5	1.5	2.0	2.0	10.20	16.29	0.00	2.60	0.00	14.55	29.09
ELECTRIC PWR LINEMAN	All	ALL		62.10	68.14	1.5	1.5	2.0	2.0	13.08	20.88	0.00	3.32	0.00	18.64	37.28
ELECTRICIAN	All	BLD		54.00	58.86	1.5	1.5	2.0	2.0	17.74	22.27	0.00	1.35	5.00	0.00	0.00
ELEVATOR CONSTRUCTOR	All	BLD		67.84	76.32	2.0	2.0	2.0	2.0	16.18	20.96	5.42	0.75		0.00	0.00
GLAZIER	All	BLD		51.55	53.05	1.5	2.0	2.0	2.0	15.64	26.18	0.00	2.27	0.00	0.00	0.00
HEAT/FROST INSULATOR	All	BLD		55.02	58.32	1.5	1.5	2.0	2.0	15.84	19.01	0.00	0.90		4.60	9.20
IRON WORKER	All	ALL		50.50	55.55	2.0	2.0	2.0	2.0	14.06	30.21	0.00	1.00		0.00	0.00
LABORER	All	ALL		50.15	50.90	1.5	1.5	2.0	2.0	17.71	16.92	0.00	0.91		0.00	0.00
LATHER	All	ALL		55.11	60.62	2.0	2.0	2.0	2.0	12.89	30.48	0.70	0.93	0.00	0.00	0.00
MACHINIST	All	BLD		58.39	62.39	1.5	1.5	2.0	2.0	9.93	8.95	1.85	1.47		0.00	0.00
MARBLE FINISHER	All	ALL		39.50	53.55	1.5	1.5	2.0	2.0	12.70	22.32	0.00	0.73	0.00	2.88	5.76
MARBLE SETTER	All	BLD		51.00	56.10	1.5	1.5	2.0	2.0	12.70	24.01	0.00	0.92	0.00	3.73	7.45
MATERIAL TESTER I	All	ALL		40.15		1.5	1.5	2.0	2.0	17.71	16.92	0.00	0.91		0.00	0.00
MATERIALS TESTER II	All	ALL		45.15		1.5	1.5	2.0	2.0	17.71	16.92	0.00	0.91		0.00	0.00
MILLWRIGHT	All	ALL		55.11	60.62	2.0	2.0	2.0	2.0	12.89	30.48	0.70	0.93	0.00	0.00	0.00
OPERATING ENGINEER	All	BLD	1	60.80	64.80	2.0	2.0	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00

# Will County Prevailing Wage Rates posted on 1/15/2025

OPERATING ENGINEER	All	BLD	2	59.50	64.80	2.0	2.0	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	BLD	3	56.95	64.80	2.0	2.0	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	BLD	4	55.20	64.80	2.0	2.0	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	BLD	5	64.55	64.80	2.0	2.0	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	BLD	6	61.80	64.80	2.0	2.0	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	BLD	7	63.80	64.80	2.0	2.0	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	FLT	1	69.35	69.35	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	FLT	2	67.85	69.35	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	FLT	3	63.35	69.35	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	FLT	4	58.85	69.35	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	FLT	5	70.85	69.35	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	FLT	6	58.85	69.35	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	HWY	1	59.00	63.00	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	HWY	2	58.45	63.00	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	HWY	3	56.40	63.00	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	HWY	4	55.00	63.00	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	HWY	5	53.80	63.00	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	HWY	6	62.00	63.00	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
OPERATING ENGINEER	All	HWY	7	60.00	63.00	1.5	1.5	2.0	2.0	23.70	20.80	2.00	2.70	0.00	0.00	0.00
PAINTER	All	ALL		53.05	59.68	1.5	1.5	1.5	2.0	15.76	16.19	0.00	1.86	0.00	0.00	0.00
PAINTER - SIGNS	All	BLD		45.49	51.09	1.5	1.5	2.0	2.0	8.20	16.81	0.00	0.00	0.00	0.00	0.00
PILEDRIIVER	All	ALL		55.11	60.62	2.0	2.0	2.0	2.0	12.89	30.48	0.70	0.93	0.00	0.00	0.00
PIPEFITTER	All	BLD		57.00	60.00	1.5	1.5	2.0	2.0	13.65	22.85	0.00	3.12	0.00	0.00	0.00
PLASTERER	All	BLD		50.00	53.00	1.5	1.5	2.0	2.0	17.81	21.22	0.00	1.15		0.00	0.00
PLUMBER	All	BLD		58.55	62.05	1.5	1.5	2.0	2.0	17.75	17.74	0.00	1.83		0.00	0.00
ROOFER	All	BLD		50.25	55.25	1.5	1.5	2.0	2.0	11.98	17.34	0.00	1.11	0.00	0.00	0.00
SHEETMETAL WORKER	All	BLD		56.35	60.86	1.5	1.5	2.0	2.0	15.41	19.83	0.00	1.79	2.62	0.00	0.00
SPRINKLER FITTER	All	BLD		60.00	62.75	1.5	1.5	2.0	2.0	14.95	19.40	0.00	1.10	0.00	0.00	0.00
STONE MASON	All	BLD		52.06	57.27	1.5	1.5	2.0	2.0	12.70	24.54	0.00	1.24	0.00	3.99	7.98
SURVEY WORKER	All	BLD		56.50	57.50	1.5	1.5	2.0	2.0	17.75	14.15	0.00	1.49		0.00	0.00

## Will County Prevailing Wage Rates posted on 1/15/2025

SURVEY WORKER	All	HWY		56.50	57.50	1.5	1.5	2.0	2.0	17.75	14.15	0.00	1.49		0.00	0.00
TERRAZZO FINISHER	All	BLD		48.94	48.94	1.5	1.5	2.0	2.0	13.00	18.42	0.00	1.11	0.00	4.22	8.44
TERRAZZO MECHANIC	All	BLD		52.85	56.35	1.5	1.5	2.0	2.0	13.00	19.81	0.00	1.15	0.00	4.47	8.94
TRAFFIC SAFETY WORKER I	All	HWY		42.10	43.70	1.5	1.5	2.0	2.0	11.11	9.81	0.00	1.05	0.00	0.00	0.00
TRAFFIC SAFETY WORKER II	ALL	HWY		43.10	44.70	1.5	1.5	2.0	2.0	11.11	9.81	0.00	1.05	0.00	0.00	0.00
TRUCK DRIVER	All	ALL	1	45.10		1.5	1.5	2.0	2.0	11.65	13.76	0.00	0.25	0.00	0.00	0.00
TRUCK DRIVER	All	ALL	2	45.25		1.5	1.5	2.0	2.0	11.65	13.76	0.00	0.25	0.00	0.00	0.00
TRUCK DRIVER	All	ALL	3	45.45		1.5	1.5	2.0	2.0	11.65	13.76	0.00	0.25	0.00	0.00	0.00
TRUCK DRIVER	All	ALL	4	45.65		1.5	1.5	2.0	2.0	11.65	13.76	0.00	0.25	0.00	0.00	0.00
TUCK POINTER	All	BLD		51.53	52.53	1.5	1.5	2.0	2.0	10.05	22.66	0.00	1.15	0.00	0.00	0.00

### Legend

**Rg** Region

**Type** Trade Type - All,Highway,Building,Floating,Oil & Chip,Rivers

**C** Class

**Base** Base Wage Rate

**OT M-F** Unless otherwise noted, OT pay is required for any hour greater than 8 worked each day, Mon through Fri. The number listed is the multiple of the base wage.

**OT Sa** Overtime pay required for every hour worked on Saturdays

**OT Su** Overtime pay required for every hour worked on Sundays

**OT Hol** Overtime pay required for every hour worked on Holidays

**H/W** Health/Welfare benefit

**Vac** Vacation

**Trng** Training

**Other Ins** Employer hourly cost for any other type(s) of insurance provided for benefit of worker.

Explanations WILL COUNTY

The following list is considered as those days for which holiday rates of wages for work performed apply: New Years Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day, Christmas Day and Veterans Day in some classifications/counties. Generally, any of these holidays which fall on a Sunday is celebrated on the following Monday. This then makes work performed on that Monday payable at the appropriate overtime rate for holiday pay. Common practice in a given local may alter certain days of celebration. If in doubt, please check with IDOL.

EXPLANATION OF CLASSES

ASBESTOS - GENERAL - removal of asbestos material/mold and hazardous materials from any place in a building, including

## **Will County Prevailing Wage Rates posted on 1/15/2025**

mechanical systems where those mechanical systems are to be removed. This includes the removal of asbestos materials/mold and hazardous materials from ductwork or pipes in a building when the building is to be demolished at the time or at some close future date.

ASBESTOS - MECHANICAL - removal of asbestos material from mechanical systems, such as pipes, ducts, and boilers, where the mechanical systems are to remain.

### **CERAMIC TILE FINISHER**

The grouting, cleaning, and polishing of all classes of tile, whether for interior or exterior purposes, all burned, glazed or unglazed products; all composition materials, granite tiles, warning detectable tiles, cement tiles, epoxy composite materials, pavers, glass, mosaics, fiberglass, and all substitute materials, for tile made in tile-like units; all mixtures in tile like form of cement, metals, and other materials that are for and intended for use as a finished floor surface, stair treads, promenade roofs, walks, walls, ceilings, swimming pools, and all other places where tile is to form a finished interior or exterior. The mixing of all setting mortars including but not limited to thin-set mortars, epoxies, wall mud, and any other sand and cement mixtures or adhesives when used in the preparation, installation, repair, or maintenance of tile and/or similar materials. The handling and unloading of all sand, cement, lime, tile, fixtures, equipment, adhesives, or any other materials to be used in the preparation, installation, repair, or maintenance of tile and/or similar materials. Ceramic Tile Finishers shall fill all joints and voids regardless of method on all tile work, particularly and especially after installation of said tile work. Application of any and all protective coverings to all types of tile installations including, but not be limited to, all soap compounds, paper products, tapes, and all polyethylene coverings, plywood, masonite, cardboard, and any new type of products that may be used to protect tile installations, Blastrac equipment, and all floor scarifying equipment used in preparing floors to receive tile. The clean up and removal of all waste and materials. All demolition of existing tile floors and walls to be re-tiled.

### **COMMUNICATIONS TECHNICIAN**

Installation, operation, inspection, maintenance, repair and service of radio, television, recording, voice, sound and vision production and reproduction, telephone and telephone interconnect, facsimile, equipment and appliances used for domestic, commercial, educational and entertainment purposes, pulling of wire through conduit but not the installation of conduit.

### **MARBLE FINISHER**

Loading and unloading trucks, distribution of all materials (all stone, sand, etc.), stocking of floors with material, performing all rigging for heavy work, the handling of all material that may be needed for the installation of such materials, building of scaffolding, polishing if needed, patching, waxing of material if damaged, pointing up, caulking, grouting and cleaning of marble, holding water on diamond or Carborundum blade or saw for setters cutting, use of tub saw or any other saw needed for preparation of material, drilling of holes for wires that anchor material set by setters, mixing up of molding plaster for installation of material, mixing up thin set for the installation of material, mixing up of sand to cement for the installation of material and such other work as may be required in helping a Marble Setter in the handling of all material in the erection or installation of interior marble, slate, travertine, art marble, serpentine, alberene stone, blue stone, granite and other stones (meaning as to stone any foreign or domestic materials as are specified and used in building interiors and exteriors and customarily known as stone in the trade), carrara, sanionyx, vitrolite and similar opaque glass and the laying of all marble tile, terrazzo tile, slate tile and precast

## **Will County Prevailing Wage Rates posted on 1/15/2025**

tile, steps, risers treads, base, or any other materials that may be used as substitutes for any of the aforementioned materials and which are used on interior and exterior which are installed in a similar manner.

MATERIAL TESTER I: Hand coring and drilling for testing of materials; field inspection of uncured concrete and asphalt.

MATERIAL TESTER II: Field inspection of welds, structural steel, fireproofing, masonry, soil, facade, reinforcing steel, formwork, cured concrete, and concrete and asphalt batch plants; adjusting proportions of bituminous mixtures.

### **OPERATING ENGINEER - BUILDING**

Class 1. Asphalt Plant; Asphalt Spreader; Autograde; Backhoes with Caisson Attachment; Batch Plant; Benoto (requires Two Engineers); Boiler and Throttle Valve; Caisson Rigs; Central Redi-Mix Plant; Combination Back Hoe Front End-loader Machine; Compressor and Throttle Valve; Concrete Breaker (Truck Mounted); Concrete Conveyor; Concrete Conveyor (Truck Mounted); Concrete Paver Over 27E cu. ft; Concrete Paver 27E cu. ft. and Under; Concrete Placer; Concrete Placing Boom; Concrete Pump (Truck Mounted); Concrete Tower; Cranes, All; Cranes, Hammerhead; Cranes, (GCI and similar Type); Creter Crane; Spider Crane; Crusher, Stone, etc.; Derricks, All; Derricks, Traveling; Formless Curb and Gutter Machine; Grader, Elevating; Grouting Machines; Heavy Duty Self-Propelled Transporter or Prime Mover; Highlift Shovels or Front Endloader 2-1/4 yd. and over; Hoists, Elevators, outside type rack and pinion and similar machines; Hoists, One, Two and Three Drum; Hoists, Two Tugger One Floor; Hydraulic Backhoes; Hydraulic Boom Trucks; Hydro Vac (and similar equipment); Locomotives, All; Motor Patrol; Lubrication Technician; Manipulators; Pile Drivers and Skid Rig; Post Hole Digger; Pre-Stress Machine; Pump Cretes Dual Ram; Pump Cretes: Squeeze Cretes-Screw Type Pumps; Gypsum Bulker and Pump; Raised and Blind Hole Drill; Roto Mill Grinder; Scoops - Tractor Drawn; Slip-Form Paver; Straddle Buggies; Operation of Tie Back Machine; Tournapull; Tractor with Boom and Side Boom; Trenching Machines.

Class 2. Boilers; Broom, All Power Propelled; Bulldozers; Concrete Mixer (Two Bag and Over); Conveyor, Portable; Forklift Trucks; Highlift Shovels or Front Endloaders under 2-1/4 yd.; Hoists, Automatic; Hoists, Inside Elevators; Hoists, Sewer Dragging Machine; Hoists, Tugger Single Drum; Laser Screed; Rock Drill (Self-Propelled); Rock Drill (Truck Mounted); Rollers, All; Steam Generators; Tractors, All; Tractor Drawn Vibratory Roller; Winch Trucks with "A" Frame.

Class 3. Air Compressor; Combination Small Equipment Operator; Generators; Heaters, Mechanical; Hoists, Inside Elevators (remodeling or renovation work); Hydraulic Power Units (Pile Driving, Extracting, and Drilling); Pumps, over 3" (1 to 3 not to exceed a total of 300 ft.); Low Boys; Pumps, Well Points; Welding Machines (2 through 5); Winches, 4 Small Electric Drill Winches.

Class 4. Bobcats and/or other Skid Steer Loaders; Oilers; and Brick Forklift.

Class 5. Assistant Craft Foreman.

Class 6. Gradall.

Class 7. Mechanics; Welders.

### **OPERATING ENGINEERS - HIGHWAY CONSTRUCTION**

## **Will County Prevailing Wage Rates posted on 1/15/2025**

Class 1. Asphalt Plant; Asphalt Heater and Planer Combination; Asphalt Heater Scarfire; Asphalt Spreader; Autograder/GOMACO or other similar type machines; ABG Paver; Backhoes with Caisson Attachment; Ballast Regulator; Belt Loader; Caisson Rigs; Car Dumper; Central Redi-Mix Plant; Combination Backhoe Front Endloader Machine, (1 cu. yd. Backhoe Bucket or over or with attachments); Concrete Breaker (Truck Mounted); Concrete Conveyor; Concrete Paver over 27E cu. ft.; Concrete Placer; Concrete Tube Float; Cranes, all attachments; Cranes, Tower Cranes of all types: Creter Crane: Spider Crane; Crusher, Stone, etc.; Derricks, All; Derrick Boats; Derricks, Traveling; Dredges; Elevators, Outside type Rack & Pinion and Similar Machines; Formless Curb and Gutter Machine; Grader, Elevating; Grader, Motor Grader, Motor Patrol, Auto Patrol, Form Grader, Pull Grader, Subgrader; Guard Rail Post Driver Truck Mounted; Hoists, One, Two and Three Drum; Heavy Duty Self-Propelled Transporter or Prime Mover; Hydraulic Backhoes; Backhoes with shear attachments up to 40' of boom reach; Lubrication Technician; Manipulators; Mucking Machine; Pile Drivers and Skid Rig; Pre-Stress Machine; Pump Cretes Dual Ram; Rock Drill - Crawler or Skid Rig; Rock Drill - Truck Mounted; Rock/Track Tamper; Roto Mill Grinder; Slip-Form Paver; Snow Melters; Soil Test Drill Rig (Truck Mounted); Straddle Buggies; Hydraulic Telescoping Form (Tunnel); Operation of Tieback Machine; Tractor Drawn Belt Loader; Tractor Drawn Belt Loader (with attached pusher - two engineers); Tractor with Boom; Tractaire with Attachments; Traffic Barrier Transfer Machine; Trenching; Truck Mounted Concrete Pump with Boom; Raised or Blind Hole Drills (Tunnel Shaft); Underground Boring and/or Mining Machines 5 ft. in diameter and over tunnel, etc; Underground Boring and/or Mining Machines under 5 ft. in diameter; Wheel Excavator; Widener (APSCO).

Class 2. Batch Plant; Bituminous Mixer; Boiler and Throttle Valve; Bulldozers; Car Loader Trailing Conveyors; Combination Backhoe Front Endloader Machine (Less than 1 cu. yd. Backhoe Bucket or over or with attachments); Compressor and Throttle Valve; Compressor, Common Receiver (3); Concrete Breaker or Hydro Hammer; Concrete Grinding Machine; Concrete Mixer or Paver 7S Series to and including 27 cu. ft.; Concrete Spreader; Concrete Curing Machine, Burlap Machine, Belting Machine and Sealing Machine; Concrete Wheel Saw; Conveyor Muck Cars (Haglund or Similar Type); Drills, All; Finishing Machine - Concrete; Highlift Shovels or Front Endloader; Hoist - Sewer Dragging Machine; Hydraulic Boom Trucks (All Attachments); Hydro-Blaster; Hydro Excavating (excluding hose work); Laser Screed; All Locomotives, Dinky; Off-Road Hauling Units (including articulating) Non Self-Loading Ejection Dump; Pump Cretes: Squeeze Cretes - Screw Type Pumps, Gypsum Bulker and Pump; Roller, Asphalt; Rotary Snow Plows; Rototiller, Seaman, etc., self-propelled; Self-Propelled Compactor; Spreader - Chip - Stone, etc.; Scraper - Single/Twin Engine/Push and Pull; Scraper - Prime Mover in Tandem (Regardless of Size); Tractors pulling attachments, Sheeps Foot, Disc, Compactor, etc.; Tug Boats.

Class 3. Boilers; Brooms, All Power Propelled; Cement Supply Tender; Compressor, Common Receiver (2); Concrete Mixer (Two Bag and Over); Conveyor, Portable; Farm-Type Tractors Used for Mowing, Seeding, etc.; Forklift Trucks; Grouting Machine; Hoists, Automatic; Hoists, All Elevators; Hoists, Tugger Single Drum; Jeep Diggers; Low Boys; Pipe Jacking Machines; Post-Hole Digger; Power Saw, Concrete Power Driven; Pug Mills; Rollers, other than Asphalt; Seed and Straw Blower; Steam Generators; Stump Machine; Winch Trucks with "A" Frame; Work Boats; Tamper-Form-Motor Driven.

Class 4. Air Compressor; Combination - Small Equipment Operator; Directional Boring Machine; Generators; Heaters, Mechanical; Hydraulic Power Unit (Pile Driving, Extracting, or Drilling); Light Plants, All (1 through 5); Pumps, over 3" (1 to 3 not to exceed a total of 300 ft.); Pumps, Well Points; Vacuum Trucks (excluding hose work); Welding Machines (2 through 5); Winches, 4 Small Electric Drill Winches.

Class 5. SkidSteer Loader (all); Brick Forklifts; Oilers.

## **Will County Prevailing Wage Rates posted on 1/15/2025**

Class 6. Field Mechanics and Field Welders

Class 7. Dowell Machine with Air Compressor; Gradall and machines of like nature.

### **OPERATING ENGINEER - FLOATING**

Class 1. Craft Foreman; Master Mechanic; Diver/Wet Tender; Engineer; Engineer (Hydraulic Dredge).

Class 2. Crane/Backhoe Operator; Boat Operator with towing endorsement; Mechanic/Welder; Assistant Engineer (Hydraulic Dredge); Leverman (Hydraulic Dredge); Diver Tender.

Class 3. Deck Equipment Operator, Machineryman, Maintenance of Crane (over 50 ton capacity) or Backhoe (115,000 lbs. or more); Tug/Launch Operator; Loader/Dozer and like equipment on Barge, Breakwater Wall, Slip/Dock, or Scow, Deck Machinery, etc.

Class 4. Deck Equipment Operator, Machineryman/Fireman (4 Equipment Units or More); Off Road Trucks; Deck Hand, Tug Engineer, Crane Maintenance (50 Ton Capacity and Under) or Backhoe Weighing (115,000 pounds or less); Assistant Tug Operator.

Class 5. Friction or Lattice Boom Cranes.

Class 6. ROV Pilot, ROV Tender

### **SURVEY WORKER**

Operates survey equipment (such as levels, transits, data collectors, GPS and robotic total stations) for the purpose of performing construction layout and/or grade checking.

### **SURVEY FOREMAN**

Operates survey equipment (such as levels, transits, data collectors, GPS and robotic total stations) for the purpose of performing construction layout and/or grade checking; oversees survey crew operations; and/or coordinates work of survey crews.

### **TRAFFIC SAFETY Worker I**

Traffic Safety Worker I - work associated with the delivery, installation, pick-up and servicing of safety devices during periods of roadway construction, including such work as set-up and maintenance of barricades, barrier wall reflectors, drums, cones, delineators, signs, crash attenuators, glare screen and other such items, and the layout and application or removal of conflicting and/or temporary roadway markings utilized to control traffic in construction zones, as well as flagging for these operations.

### **TRAFFIC SAFETY WORKER II**

Work associated with the installation and removal of permanent pavement markings and/or pavement markers including both installations performed by hand and installations performed by truck.

## **Will County Prevailing Wage Rates posted on 1/15/2025**

### **TRUCK DRIVER - BUILDING, HEAVY AND HIGHWAY CONSTRUCTION**

Class 1. Two or three Axle Trucks. A-frame Truck when used for transportation purposes; Air Compressors and Welding Machines, including those pulled by cars, pick-up trucks and tractors; Ambulances; Batch Gate Lockers; Batch Hopperman; Car and Truck Washers; Carry-alls; Fork Lifts and Hoisters; Helpers; Mechanics Helpers and Greasers; Oil Distributors 2-man operation; Pavement Breakers; Pole Trailer, up to 40 feet; Power Mower Tractors; Self-propelled Chip Spreader; Skipman; Slurry Trucks, 2-man operation; Slurry Truck Conveyor Operation, 2 or 3 man; Teamsters; Unskilled Dumpman; and Truck Drivers hauling warning lights, barricades, and portable toilets on the job site.

Class 2. Four axle trucks; Dump Crets and Adgetors under 7 yards; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment under 16 cubic yards; Mixer Trucks under 7 yards; Ready-mix Plant Hopper Operator, and Winch Trucks, 2 Axles.

Class 3. Five axle trucks; Dump Crets and Adgetors 7 yards and over; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnatrailers or turnapulls when pulling other than self-loading equipment or similar equipment over 16 cubic yards; Explosives and/or Fission Material Trucks; Mixer Trucks 7 yards or over; Mobile Cranes while in transit; Oil Distributors, 1-man operation; Pole Trailer, over 40 feet; Pole and Expandable Trailers hauling material over 50 feet long; Slurry trucks, 1-man operation; Winch trucks, 3 axles or more; Mechanic--Truck Welder and Truck Painter.

Class 4. Six axle trucks; Dual-purpose vehicles, such as mounted crane trucks with hoist and accessories; Foreman; Master Mechanic; Self-loading equipment like P.B. and trucks with scoops on the front.

### **TERRAZZO FINISHER**

The handling of sand, cement, marble chips, and all other materials that may be used by the Mosaic Terrazzo Mechanic, and the mixing, grinding, grouting, cleaning and sealing of all Marble, Mosaic, and Terrazzo work, floors, base, stairs, and wainscoting by hand or machine, and in addition, assisting and aiding Marble, Masonic, and Terrazzo Mechanics.

### **Other Classifications of Work:**

For definitions of classifications not otherwise set out, the Department generally has on file such definitions which are available. If a task to be performed is not subject to one of the classifications of pay set out, the Department will upon being contacted state which neighboring county has such a classification and provide such rate, such rate being deemed to exist by reference in this document. If no neighboring county rate applies to the task, the Department shall undertake a special determination, such special determination being then deemed to have existed under this determination. If a project requires these, or any classification not listed, please contact IDOL at 217-782-1710 for wage rates or clarifications.

### **LANDSCAPING**

Landscaping work falls under the existing classifications for laborer, operating engineer and truck driver. The work performed by landscape plantsman and landscape laborer is covered by the existing classification of laborer. The work performed by landscape operators (regardless of equipment used or its size) is covered by the classifications of operating engineer. The work



## **Will County Prevailing Wage Rates posted on 1/15/2025**

performed by landscape truck drivers (regardless of size of truck driven) is covered by the classifications of truck driver.

MATERIAL TESTER & MATERIAL TESTER/INSPECTOR I AND II

Notwithstanding the difference in the classification title, the classification entitled "Material Tester I" involves the same job duties as the classification entitled "Material Tester/Inspector I". Likewise, the classification entitled "Material Tester II" involves the same job duties as the classification entitled "Material Tester/Inspector II".

**CERTIFICATION OF CONTRACT/BIDDER**

The below signed contractor/bidder hereby certifies that it is not barred from bidding on this or any other contract due to any violation of either Section 33E-3 or 33E-4 of Article 33E, Public Contracts, of the Illinois Criminal Code of 1961, as amended. This certification is required by Public Act 85-1295. This Act relates to interference with public contracting, bid rigging and rotating, kickbacks and bribery.

\_\_\_\_\_  
SIGNATURE OF CONTRACTOR/BIDDER

\_\_\_\_\_  
TITLE

\_\_\_\_\_  
DATE

THIS FORM **MUST** BE SCANNED & SUBMITTED WITH YOUR BID

**CERTIFICATE OF COMPLIANCE WITH  
ILLINOIS DRUG-FREE WORKPLACE ACT**

\_\_\_\_\_, does hereby certify pursuant to the *Illinois Drug-Free Workplace Act* (30 ILCS 580/) that [he, she, it] shall provide a drug-free workplace for all employees engaged in the performance of work under the contract by complying with the requirements of the *Illinois Drug-Free Workplace Act* and, further certifies, that [he, she, it] is not ineligible for award of this contract by reason of debarment for a violation of the *Illinois Drug-Free Workplace Act*.

\_\_\_\_\_  
By Authorized Agent

\_\_\_\_\_  
Date

SUBSCRIBED AND SWORN TO before me  
This \_\_\_\_ day of \_\_\_\_\_, 20\_\_.

\_\_\_\_\_  
NOTARY PUBLIC

**EXECUTE AND ATTACH TO PROPOSAL FORM**

**JOLIET JUNIOR COLLEGE – REQUEST FOR BID**

**DRAWINGS ARE AVAILABLE ON THE FOLLOWING WEBSITE:**

**[WWW.JJC.EDU/COMMUNITY/VENDORS](http://WWW.JJC.EDU/COMMUNITY/VENDORS)**

**BID FORM**

To: Joliet Junior College  
1215 Houbolt Road  
Joliet, IL 60431-8938

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Submitted by:

\_\_\_\_\_  
(Full Name)

\_\_\_\_\_  
(Address)

\_\_\_\_\_  
(City, State, Zip)

\_\_\_\_\_  
(Phone) (Fax) (Email)

**PART 1 OFFER**

Having examined the site and having familiarized itself with the conditions affecting the cost of the work associated with the \_\_\_\_\_, and with the bidding documents, Bidder hereby proposes to perform everything required and to furnish all labor, materials, necessary tools, expendable equipment and transportation services necessary to complete in a workmanlike manner the subdivision of work stated above in accordance with the bidding documents for the following sums:

<b>S Building Piping:</b>	
<b>+ B &amp; C Building Piping:</b>	
<b>+ Allowance:</b>	\$7,500.00
<b>= Total Base Bid:</b>	

**Total Base Bid:**

\_\_\_\_\_

Dollars(\$ \_\_\_\_\_)

Write amount in both alpha and numeric, in case of discrepancy the lesser amount shown will govern.

**B & C Building Piping Alternate #1:**

\_\_\_\_\_

Dollars(\$ \_\_\_\_\_)

Write amount in both alpha and numeric, in case of discrepancy the lesser amount shown will govern.

We have included herewith, the Security Deposit as required by the Instructions to Bidders.

**PART 2 ACCEPTANCE**

This offer shall be open to acceptance and is irrevocable for thirty (30) days from the Bid closing date.

If the bid is accepted by the Owner within the time period stated above, we will:

- A. Execute the Agreement within ten (10) days of receipt of Notice of Award.
- B. Furnish the required bonds within ten (10) days of receipt of Notice of Award in the form described in the Instruction to Bidders.
- C. Furnish the required Certificate of Insurance within ten (10) days of receipt of Notice of Award in the form and amounts described in the Instruction to Bidders.
- D. Commence work as established by the written Notice to Proceed.

If this Bid is accepted within the time stated, and we fail to commence the Work or we fail to provide the required Bonds(s), the Security Deposit shall be forfeited as damages to the Owner by reason of our failures.

In the event our Bid is not accepted within the time stated above, the required security deposit shall be returned to the undersigned, in accordance with the provisions of the Instructions to Bidders; unless a mutually satisfactory arrangement is made for its retention and validity for an extended period of time.

**PART 3 CONTRACT TIME**

If the Bid is accepted, we will:

- A. Complete the work in manner consistent to meet the requirements of the schedule (\_\_\_\_\_) consecutive calendar days from the date established as the Date of Commencement in the Notice to Proceed.
- B. Contractor has examined the Schedule included in these documents and takes no exception, or records the following exceptions:

---



---



---

**PART 4 CONTRACTOR’S FEES FOR CHANGES IN THE WORK**

Lump Sum of Time and Materials Changes: We the undersigned bidder agree that the following percentages for overhead and profit shall be added to job costs for the net amount of work added to or deleted from the contract by written lump sum or

time and material change orders recommended by the Engineer and approved by the Owner:

Add to net extra for job costs for additional work performed by:

Our own forces 12%

Our subcontractor 5% (including assigned subcontractors)

Note: Insurance, bond, and taxes are considered as job cost items and are not included in the percentages listed above.

**PART 5 ADDENDA**

The following Addenda have been received. The modifications to the Bid Documents noted therein have been considered and all costs thereto are included in the Bid Sum.

Addendum # \_\_\_\_\_ Dated \_\_\_\_\_

Addendum # \_\_\_\_\_ Dated \_\_\_\_\_

Addendum # \_\_\_\_\_ Dated \_\_\_\_\_

**PART 6 SUBCONTRACTORS**

A. The following work will be performed (or provided) by the Subcontractors we have indicated below:

	<u>Name of Subcontractor</u>	<u>Work Performed</u>
1.	_____	_____
2.	_____	_____
3.	_____	_____
4.	_____	_____

B. We understand, and hereby agree, that we are obligated to use the indicated subcontractors, unless prior written permission to change has been obtained from the Owner.

**PART 7 RELATED WORK EXPERIENCE**

List a minimum of three jobs of similar type and scope performed in the last five years:

1. Client: \_\_\_\_\_

Building: \_\_\_\_\_

Phone: \_\_\_\_\_

Contact Name: \_\_\_\_\_

Dollar Amount: \_\_\_\_\_

2. Client: \_\_\_\_\_

Building: \_\_\_\_\_

Phone: \_\_\_\_\_

Contact Name: \_\_\_\_\_

Dollar Amount: \_\_\_\_\_

3. Client: \_\_\_\_\_

Building: \_\_\_\_\_

Phone: \_\_\_\_\_

Contact Name: \_\_\_\_\_

Dollar Amount: \_\_\_\_\_

**PART 8 BID FORM ADDITION**

**Apprenticeship and Training Certification**

In accordance with the Illinois Procurement Code, the Bidder certifies that the work to be performed by it and/or its subcontractors shall, at the time of such bid opening and at the time of the performance of work pursuant to the terms of this Contract, shall have participated in the approved apprenticeship and training programs as provided for above. The bidder shall list, in the space below, the official name of the program sponsor holding the certificate of registration or all types of work or crafts in which the bidder is a participant and that will be performed by the bidder and its sub-contractor's employees. Work that will be sub-contracted shall be indicated to be subcontracted work as provided for herein. **Failure to list required information may result in disqualification of bid.**

---

---

---



---



---



---



---



---

**PART 9 CONTRACTOR EVALUATION**

Upon completion of the project, a Construction Contractor Performance Evaluation form will be completed by the A/E and the JJC Project Coordinator. The contractor will be evaluated in the following categories:

- Professionally Administered and Supervised Work
- Business Practices
- Overall Performance
- Workmanship
- Timeliness
- Project Management

**PART 10 BID FORM SIGNATURES(S)**

The Corporate Seal of:

---

(Bidder – please print the full name of your Proprietorship, Partnership, or Corporation)

Was hereunto affixed in the presence of:

(Authorized signing officer)	(Title)
(Seal)	

(Authorized signing officer)	(Title)
------------------------------	---------

If the bid is a joint venture or partnership, add additional forms of execution for each member of the joint venture in the appropriate form or forms as above.

END OF SECTION